



# **The Weblate Manual**

*Version 4.11*

**Michal Čihař**

févr. 25, 2022

<b>1</b>	<b>Documentation pour l'utilisateur</b>	<b>1</b>
1.1	Bases de Weblate	1
1.2	Inscription et profil utilisateur	1
1.3	Traduction à l'aide de Weblate	10
1.4	Téléchargement et téléversement des traductions	21
1.5	Glossaire	24
1.6	Contrôles de qualité et corrections	27
1.7	Recherche	48
1.8	Flux de travail de traduction	54
1.9	Foire aux questions	57
1.10	Formats de fichiers pris en charge	65
1.11	Intégration avec le système de contrôle de versions	85
1.12	API REST de Weblate	92
1.13	Client Weblate	130
1.14	API Python de Weblate	135
<b>2</b>	<b>Documentation pour l'administrateur</b>	<b>137</b>
2.1	Instructions de configuration	137
2.2	Déploiements Weblate	199
2.3	Mise à niveau de Weblate	200
2.4	Sauvegarder et déplacer Weblate	207
2.5	Authentification	213
2.6	Contrôle d'accès	223
2.7	Projets de traduction	233
2.8	Définitions de langue	250
2.9	Traduction en continu	252
2.10	Licence des traductions	262
2.11	Processus de traduction	263
2.12	Contrôles de qualité et corrections	269
2.13	Traduction automatisée	278
2.14	Modules	285
2.15	Mémoire de traduction	300
2.16	Configuration	302
2.17	Configuration d'exemple	331
2.18	Commandes de gestion	347
2.19	Annonces	358
2.20	Liste des composants	361
2.21	Modules Weblate optionnels	362
2.22	Personnaliser Weblate	367
2.23	Interface de gestion	369
2.24	Getting support for Weblate	377

2.25	Documents juridiques . . . . .	380
<b>3</b>	<b>Documentation pour le contributeur</b>	<b>382</b>
3.1	Contribuer à Weblate . . . . .	382
3.2	Commencer à contribuer au code de Weblate . . . . .	383
3.3	Code source de Weblate . . . . .	388
3.4	Déboguer Weblate . . . . .	389
3.5	Weblate internals . . . . .	390
3.6	Développement de greffons . . . . .	392
3.7	Interface de Weblate . . . . .	393
3.8	Reporting issues in Weblate . . . . .	395
3.9	Weblate testsuite and continuous integration . . . . .	395
3.10	Schémas de données . . . . .	397
3.11	Publication de Weblate . . . . .	400
3.12	Sécurité et confidentialité . . . . .	401
3.13	À propos de Weblate . . . . .	402
3.14	Licence . . . . .	402
<b>4</b>	<b>Historique des modifications</b>	<b>404</b>
4.1	Weblate 4.11 . . . . .	404
4.2	Weblate 4.10.1 . . . . .	405
4.3	Weblate 4.10 . . . . .	405
4.4	Weblate 4.9.1 . . . . .	405
4.5	Weblate 4.9 . . . . .	405
4.6	Weblate 4.8.1 . . . . .	406
4.7	Weblate 4.8 . . . . .	406
4.8	Weblate 4.7.2 . . . . .	407
4.9	Weblate 4.7.1 . . . . .	407
4.10	Weblate 4.7 . . . . .	407
4.11	Weblate 4.6.2 . . . . .	407
4.12	Weblate 4.6.1 . . . . .	408
4.13	Weblate 4.6 . . . . .	408
4.14	Weblate 4.5.3 . . . . .	408
4.15	Weblate 4.5.2 . . . . .	409
4.16	Weblate 4.5.1 . . . . .	409
4.17	Weblate 4.5 . . . . .	409
4.18	Weblate 4.4.2 . . . . .	410
4.19	Weblate 4.4.1 . . . . .	410
4.20	Weblate 4.4 . . . . .	410
4.21	Weblate 4.3.2 . . . . .	411
4.22	Weblate 4.3.1 . . . . .	411
4.23	Weblate 4.3 . . . . .	411
4.24	Weblate 4.2.2 . . . . .	412
4.25	Weblate 4.2.1 . . . . .	412
4.26	Weblate 4.2 . . . . .	412
4.27	Weblate 4.1.1 . . . . .	413
4.28	Weblate 4.1 . . . . .	413
4.29	Weblate 4.0.4 . . . . .	414
4.30	Weblate 4.0.3 . . . . .	414
4.31	Weblate 4.0.2 . . . . .	414
4.32	Weblate 4.0.1 . . . . .	415
4.33	Weblate 4.0 . . . . .	415
4.34	Weblate 3.x . . . . .	416
4.35	Weblate 2.x . . . . .	424
4.36	Weblate 1.x . . . . .	433
4.37	Weblate 0.x . . . . .	436

<b>Index des modules Python</b>	<b>439</b>
---------------------------------	------------

<b>HTTP Routing Table</b>	<b>440</b>
<b>Index</b>	<b>443</b>

## 1.1 Bases de Weblate

### 1.1.1 Structure du projet et des composants

Dans Weblate, les traductions sont organisées en projets et composants. Chaque projet peut contenir un certain nombre de composants et ceux-ci contiennent des traductions dans des langues individuelles. Le composant correspond à un fichier traduisible (par exemple *GNU gettext* ou *Android string resources*). Les projets sont là pour vous aider à organiser les composants en ensembles logiques (par exemple pour regrouper toutes les traductions utilisées dans une application).

En interne, chaque projet dispose par défaut de traductions de chaînes communes qui se propagent à travers les autres composants du projet. Cela allège le fardeau de la traduction répétitive et multiversion. La propagation de la traduction peut être désactivée par *Configuration des composants* en utilisant *Permettre la propagation de la traduction* au cas où les traductions devraient diverger.

**Voir aussi :**

`../devel/integration`

## 1.2 Inscription et profil utilisateur

### 1.2.1 S'inscrire

Tout le monde peut parcourir les projets, voir les traductions ou suggérer des traductions par défaut. Seuls les utilisateurs enregistrés sont autorisés à enregistrer les modifications et sont crédités pour chaque traduction effectuée.

Vous pouvez vous inscrire en suivant les étapes suivantes :

1. Remplissez le formulaire d'inscription avec vos informations d'identification.
2. Activez l'inscription en suivant le lien figurant dans le courriel que vous recevez.
3. Ajustez éventuellement votre profil pour choisir les langues que vous connaissez.


## 1.2.2 Tableau de bord

Lorsque vous vous connectez, vous verrez un aperçu des projets et des composants, ainsi que leur progression respective en matière de traduction.

Nouveau dans la version 2.5.

Les composants des projets que vous regardez sont affichés par défaut et référencés avec vos langues préférées.

**Indication :** Vous pouvez passer d'une vue à l'autre en utilisant les onglets de navigation.

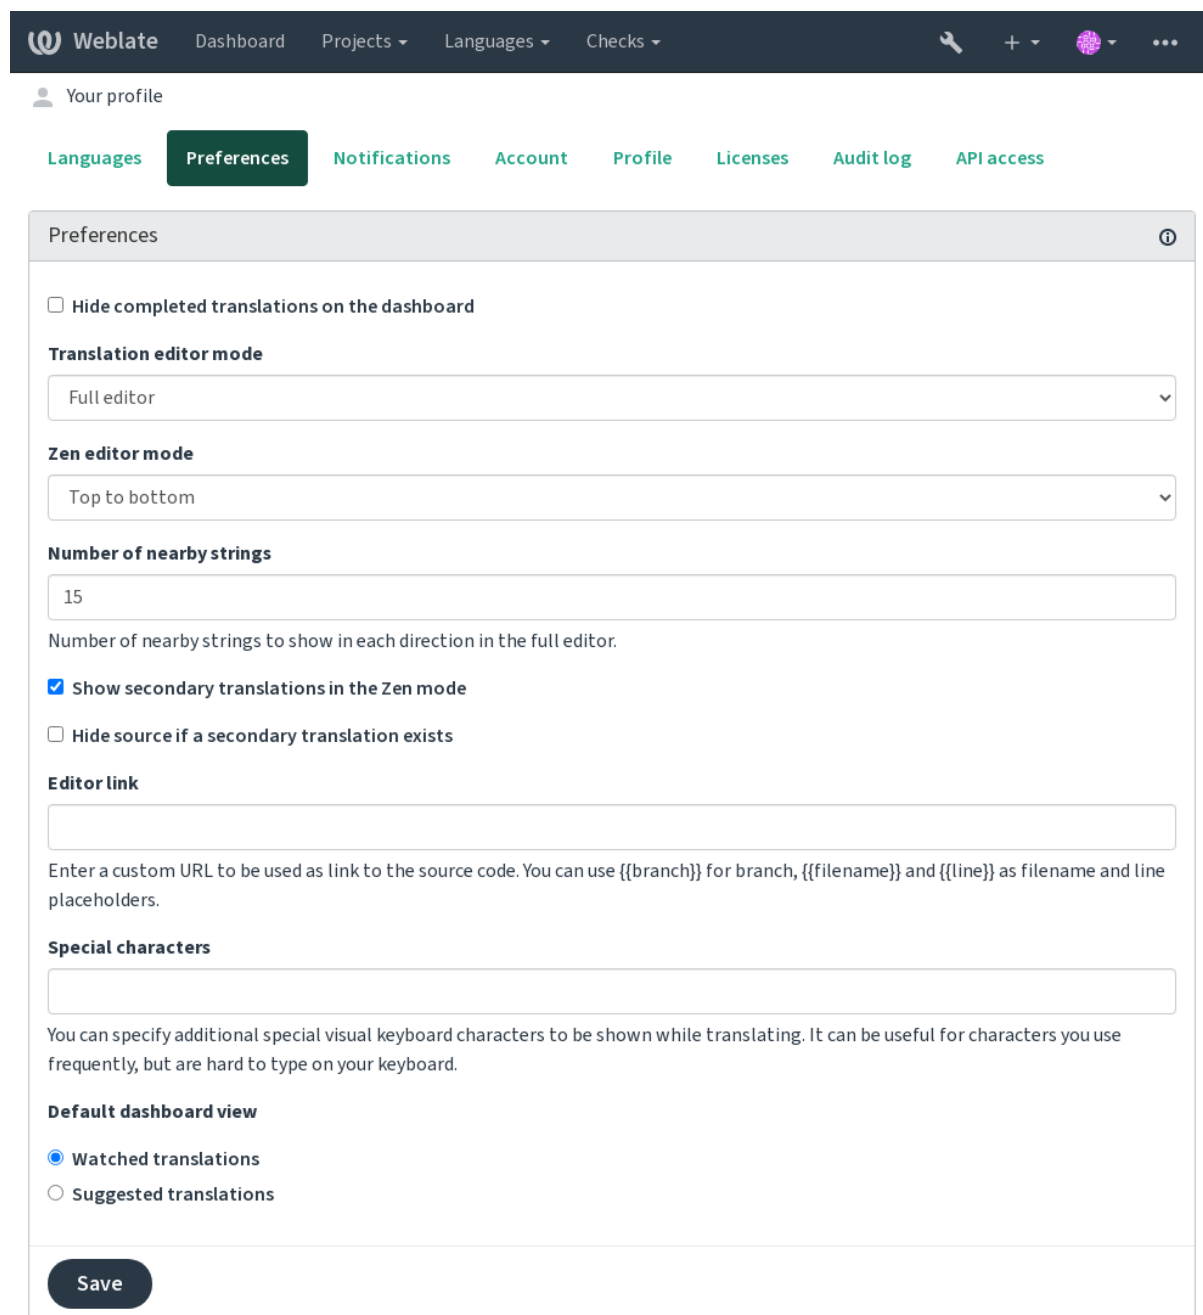

The screenshot shows the Weblate user interface. At the top is a dark navigation bar with the Weblate logo, 'Dashboard', 'Projects', 'Languages', and 'Checks' menus, along with utility icons. Below this is a 'Your profile' section with a row of tabs: 'Languages', 'Preferences' (which is active and highlighted in dark green), 'Notifications', 'Account', 'Profile', 'Licenses', 'Audit log', and 'API access'. The 'Preferences' panel is open, showing various settings. It starts with a toggle for 'Hide completed translations on the dashboard'. Under 'Translation editor mode', a dropdown menu is set to 'Full editor'. Under 'Zen editor mode', a dropdown menu is set to 'Top to bottom'. A text input field for 'Number of nearby strings' contains the value '15', with a note below it stating 'Number of nearby strings to show in each direction in the full editor.' There are two checkboxes: 'Show secondary translations in the Zen mode' (checked) and 'Hide source if a secondary translation exists' (unchecked). An 'Editor link' section has a text input field and a note: 'Enter a custom URL to be used as link to the source code. You can use {{branch}} for branch, {{filename}} and {{line}} as filename and line placeholders.' A 'Special characters' section has a text input field and a note: 'You can specify additional special visual keyboard characters to be shown while translating. It can be useful for characters you use frequently, but are hard to type on your keyboard.' The 'Default dashboard view' section has two radio buttons: 'Watched translations' (selected) and 'Suggested translations'. At the bottom of the panel is a 'Save' button.

Powered by Weblate 4.11   About Weblate   Legal   Contact   Documentation   Donate to Weblate

Le menu comporte les options suivantes :

- *Projets > Parcourir tous les projets* dans le menu principal affichant l'état de la traduction pour chaque projet de l'instance Weblate.
- En sélectionnant une langue dans le menu principal *Langues*, vous verrez l'état de la traduction de tous les projets, filtrés par une de vos langues principales.
- *Traductions surveillées* dans le tableau de bord affichera l'état de la traduction des projets que vous surveillez, filtré par vos langues principales.

En outre, la liste déroulante peut également afficher un nombre quelconque de *liste de composants*, ensembles de composants de projet préconfigurés par l'administrateur Weblate, voir [Liste des composants](#).

Vous pouvez configurer votre tableau de bord personnel dans la section *Préférences* des paramètres de votre profil d'utilisateur.

---

**Note :** Lorsque Weblate est configuré pour un seul projet en utilisant `SINGLE_PROJECT` dans le fichier `settings.py` (voir [Configuration](#)), le tableau de bord ne sera pas affiché, car l'utilisateur sera redirigé vers l'unique projet ou composant à la place.

---

### 1.2.3 Profil utilisateur

Le profil utilisateur est accessible en cliquant sur l'icône d'utilisateur en haut à droite du menu supérieur, puis sur le menu *Paramètres*.

Le profil utilisateur contient vos préférences. Le nom et l'adresse courriel utilisés dans les archivages du système de contrôle des versions, alors conservez ces informations exactes.

---

**Note :** Toutes les sélections de langue ne proposent que les langues actuellement traduites.

---

---

**Indication :** Demandez ou ajoutez d'autres langues que vous souhaitez traduire en cliquant sur le bouton pour les rendre également disponibles.

---

## Langues

### 1.2.4 Interface language

Choose the language you want to display the UI in.


#### Langues traduites

Choisissez les langues que vous préférez traduire, et elles seront proposées sur la page principale des projets surveillés, afin que vous puissiez accéder plus facilement à toutes ces traductions dans chacune de ces langues.


Dashboard
Projects ▾
Languages ▾
Checks ▾
⚙️
+
🌐
⋮

Dashboard

Watched translations 13
Suggested translations 5
Insights ▾
Search
⌵

Translation	Translated	Unfinished	Unfinished words	Checks	Suggestions
 <span>WeblateOrg/Android — Czech</span>   	76%	3	3		
 <span>WeblateOrg/Django — Hungarian</span>  	69%	8	109	1	
 <span>WeblateOrg/Django — Czech</span>   	96%	1	12	4	
 <span>WeblateOrg/Django — Hebrew</span>   	92%	2	15		
 <span>WeblateOrg/Djangojs — Hebrew</span>   	✓				
 <span>WeblateOrg/Djangojs — Hungarian</span>  	96%	2	6		
 <span>WeblateOrg/Djangojs — Czech</span>   	✓				
 <span>WeblateOrg/Language names — Hungarian</span>    	81%	4	5		
 <span>WeblateOrg/Language names — Hebrew</span>    	✓				
 <span>WeblateOrg/Language names — Czech</span>    	✓				
 <span>WeblateOrg/WebplateOrg — Czech</span>  	✓				
 <span>WeblateOrg/WebplateOrg — Hungarian</span>   	✓				
 <span>WeblateOrg/WebplateOrg — Hebrew</span>   	✓				

Powered by Weblate 4.11
 [About Weblate](#)
[Legal](#)
[Contact](#)
[Documentation](#)
[Donate to Weblate](#)



## Langues secondaires

Vous pouvez définir les langues secondaires qui vous sont présentées à titre indicatif lors de la traduction. L'image suivante montre un exemple où l'hébreu est affiché comme langue secondaire :

The screenshot shows the Weblate web interface. At the top, there's a navigation bar with 'Weblate', 'Dashboard', 'Projects', 'Languages', and 'Checks'. Below it, a breadcrumb trail shows 'WeblateOrg / Django / Czech / Translate'. A 'translated 96%' badge is visible. The main area displays a string list with 'All strings' selected. The string 'Files' is highlighted. The translation editor shows the source string 'Files' in English and its translations in Hebrew ('קבצים') and Czech ('Soubory'). The Czech translation is marked as 'Needs editing'. At the bottom of the editor are buttons for 'Save and continue', 'Save and stay', 'Suggest', and 'Skip'. Below the editor, there are tabs for 'Nearby strings' (16), 'Comments', 'Automatic suggestions', and 'Other languages' (3). A 'History' section shows a table of translations:

Language	Target string
Hebrew	קבצים
Hungarian	Fájlok
English	Files

The sidebar on the right contains a 'Glossary' section with 'English' and 'Czech' tabs, showing 'No related strings found in the glossary.' and an 'Add term to glossary' button. Below it is the 'String information' section, which includes:
 

- Screenshot context:** No screenshot currently associated. + Add screenshot
- Explanation:** No explanation currently provided.
- Labels:** No labels currently set.
- Flags:** No flags currently set.
- Source string location:** weblate/templates/translation.html:45, weblate/trans/forms.py:1404
- String age:** 10 seconds ago
- Source string age:** 10 seconds ago
- Translation file:** weblate/locale/cs/LC\_MESSAGES/django.po, string 1

## 1.2.5 Préférences

### Affichage du tableau de bord par défaut

Dans l'onglet *Préférences*, vous pouvez choisir laquelle des vues du tableau de bord disponibles doit être présentée par défaut. Si vous choisissez *Liste de composants*, vous devez sélectionner la liste des composants qui sera affichée dans la liste déroulante *Liste de composants par défaut*.

**Voir aussi :**

[Liste des composants](#)

### Lien vers l'éditeur

Un lien vers le code source est affiché dans le navigateur web configuré dans la [Configuration des composants](#) par défaut.

---

**Indication :** En définissant *Lien vers l'éditeur*, vous utilisez votre éditeur local pour ouvrir le fichier de code source des chaînes traduites du système de contrôle des versions. Vous pouvez utiliser [Balisage de modèle](#).

En général, quelque chose comme `editor://open/?file={{filename}}&line={{line}}` est une bonne option.

---

**Voir aussi :**

Vous pouvez trouver plus d'informations sur l'enregistrement de protocoles URL personnalisés pour l'éditeur dans la documentation de [Nette documentation](#).

## 1.2.6 Notifications

Abonnez-vous aux différentes notifications de l'onglet *Notifications*. Les notifications pour les événements sélectionnés sur les projets surveillés ou administrés vous seront envoyées par courriel.

Certaines notifications ne sont envoyées que pour des événements dans vos langues (par exemple au sujet de nouvelles chaînes à traduire), tandis que d'autres se déclenchent au niveau des composants (par exemple des erreurs de fusion). Ces deux groupes de notifications sont visuellement séparés dans les paramètres.


Vous pouvez basculer les notifications pour les projets surveillés et les projets administrés et il est possible de les modifier (ou de les mettre en sourdine) pour chaque projet et chaque composant. Visitez la page d'aperçu du composant et sélectionnez le choix approprié dans le menu *Surveillé*.





In case *Automatically watch projects on contribution* is enabled you will automatically start watching projects upon translating a string. The default value depends on [DEFAULT\\_AUTO\\_WATCH](#).


---

**Note :** Vous ne recevrez pas de notifications pour vos propres actions.

---


Dashboard
Projects
Languages
Checks


Your profile

Languages
Preferences
Notifications
Account
Profile
Licenses
Audit log
API access

Watched projects

☒ Automatically watch projects on contribution  
Whenever you translate a string in a project, you will start watching it.

Watched projects

Search...

Available:

WebateOrg

Chosen:

WebateOrg

You can receive notifications for watched projects and they are shown on the dashboard by default.  
Add all projects you want to translate to see them as watched projects on the dashboard.

Save

Notification settings

Other projects
Watched projects
Managed projects

Component wide notifications

You will receive a notification for every such event in your watched projects.

Repository failure

Do not notify

Repository operation

Do not notify

Component locking

Do not notify

Changed license

Do not notify

Parse error

Do not notify

Comment on own translation

Instant notification

Mentioned in comment

Instant notification

New language

Do not notify

New translation component

Do not notify

New announcement

Instant notification

New alert

Do not notify

Translation notifications

You will only receive these notifications for your translated languages in your watched projects.

New string

Do not notify

New contributor

Do not notify

New suggestion

Do not notify

New comment

Do not notify

Changed string

Do not notify

Translated string

Do not notify

Approved string

Do not notify

Pending suggestions

Do not notify

Unfinished strings

Do not notify

Save

Powered by Weblate 4.11

About Weblate

Legal

Contact

Documentation

Donate to Weblate

### 1.2.7 Compte

L'onglet *Compte* vous permet de configurer les détails de base du compte, de connecter divers services que vous pouvez utiliser pour vous connecter à Weblate, de supprimer complètement votre compte ou de télécharger vos données utilisateur (voir [Export des données utilisateur Weblate](#)).


---

**Note :** La liste des services dépend de la configuration de votre Weblate, mais elle peut inclure des sites populaires tels que GitLab, GitHub, Google, Facebook, Bitbucket, ainsi que d'autres fournisseurs OAuth 2.0.

---

Webplate

DashboardProjectsLanguagesChecks

+...

Your profile

LanguagesPreferencesNotificationsAccountProfileLicensesAudit logAPI access

Account

Username

testuser

Username may only contain letters, numbers or the following characters: @ . + - \_

Full name

Weblate Test

E-mail






weblate@example.org

You can add another e-mail address below.


Your name and e-mail will appear as commit authorship.

Save

Current user identities

Identity	User ID	Action
 Password	testuser	Change password
 E-mail	weblate@example.org	Disconnect
 Google	weblate@example.org	Disconnect
 GitHub	123456	Disconnect
 Bitbucket	weblate	Disconnect

Add new association

 E-mail

Removal

Account removal deletes all your private data.

Remove my account

User data

You can download all your private data.

Download user data

### 1.2.8 Profil

Tous les champs de cette page sont facultatifs et peuvent être supprimés à tout moment, et en les remplissant, vous nous donnez votre accord pour partager ces données partout où votre profil utilisateur apparaît.

L'avatar peut être affiché pour chaque utilisateur (en fonction du paramètre `ENABLE_AVATARS`). Les images sont obtenues en utilisant <https://gravatar.com/>.

### 1.2.9 Licences

#### 1.2.10 Accès par API

You can get or reset your API access token here.

#### 1.2.11 Journal d'audit

Le journal d'audit permet de suivre les actions effectuées avec votre compte. Il enregistre l'adresse IP et le navigateur pour chaque action importante effectuée avec votre compte. Les actions critiques déclenchent également une notification à l'adresse courriel principale.

**Voir aussi :**

*Running behind reverse proxy*

## 1.3 Traduction à l'aide de Weblate

Nous vous remercions de l'intérêt que vous portez à la traduction à l'aide de Weblate. Les projets peuvent être configurés pour une traduction directe ou en acceptant les suggestions faites par les utilisateurs sans compte.

Globalement, il existe deux modes de traduction :

- Le projet accepte les traductions directes
- The project only accepts suggestions, which are automatically validated once a defined number of votes is reached

Please see *Flux de travail de traduction* for more info on translation workflow.

Options pour la visibilité des projets de traduction :

- Visible publiquement et tout le monde peut contribuer
- Visible uniquement pour un certain groupe de traducteurs

**Voir aussi :**

*Contrôle d'accès, Flux de travail de traduction*

### 1.3.1 Projets de traduction

Translation projects hold related components ; resources for the same software, book, or project.

Component	Translated	Unfinished	Unfinished words	Checks	Suggestions	Comments
Android	79%	30	30	3		
Language names	95%	4	5	5		
Glossary WeblateOrg	100%	0	0	0		

[Add new translation component](#)

Powered by Weblate 4.11 [About Weblate](#) [Legal](#) [Contact](#) [Documentation](#) [Donate to Weblate](#)

### 1.3.2 Liens de traduction

Having navigated to a component, a set of links lead to its actual translation. The translation is further divided into individual checks, like *Untranslated strings* or *Unfinished strings*. If the whole project is translated, without error, *All strings* is still available. Alternatively you can use the search field to find a specific string or term.

Webplate

Dashboard

Projects ▾

Languages ▾

Checks ▾

+

...

WebplateOrg / Django / Czech

translated 96%

Overview

Info

Search

Insights ▾

Files ▾

Tools ▾

Manage ▾

Share ▾

Watching ▾

Translation status

26 Strings

96%

183 Words

93%

Browse

Translate

Strings status

26

All strings — 183 words

Browse

Translate

Zen

25

Translated strings — 171 words

Browse

Translate

Zen

1

Unfinished strings — 12 words

Browse

Translate

Zen

1

Untranslated strings — 12 words

Browse

Translate

Zen

1

Unfinished strings without suggestions — 12 words

Browse

Translate

Zen

3

Strings with any failing checks — 11 words

Browse

Translate

Zen

3

Translated strings with any failing checks — 11 words

Browse

Translate

Zen

1

Failing check: Unchanged translation — 4 words

Browse

Translate

Zen

1

Failing check: Mismatched full stop — 4 words

Browse

Translate

Zen

1

Failing check: Python format — 3 words

Browse

Translate

Zen

Other components

Component	Translated	Unfinished	Unfinished words	Checks	Suggestions	Comments
<div><div></div><div>Android</div><div><div></div><div>MIT</div></div></div>	76%	3	3			
<div><div></div><div>Language names</div><div><div></div><div>GPL-3.0</div></div></div>	✓					
<div><div></div><div>Glossary</div><div><div></div><div>WebplateOrg</div><div><div></div><div>GPL-3.0</div></div></div></div>	✓					
<div><div></div><div>Djangojs</div><div><div></div><div>GPL-3.0</div></div></div>	✓					

Browse all components

Powered by Weblate 4.11

About Weblate

Legal

Contact

Documentation

Donate to Weblate

1.3.3 Suggestions

**Note :** Les droits réels peuvent varier en fonction de la configuration de votre Weblate.

Anonymous users can only (by default) forward suggestions. Doing so is still available to signed-in users, in cases where uncertainty about the translation arises, prompting other translators to review it.

The suggestions are scanned on a daily basis to remove duplicates and suggestions matching the current translation.



### 1.3.4 Commentaires

Three types of comments can be posted : for translations, source strings, or to report source string bugs when this functionality is turned on using *Activer la révision des chaînes sources*. Choose the one suitable to topic you want to discuss. Source string comments are in any event good for providing feedback on the original string, for example that it should be rephrased or to ask questions about it.

You can use Markdown syntax in all comments and mention other users using `@mention`.

**Voir aussi :**

report-source, *Source strings reviews*, *Activer la révision des chaînes sources*

### 1.3.5 Variantes

Variants are used to group different length variants of the string. The frontend of your project can then use different strings depending on the screen or window size.

**Voir aussi :**

variants, *Variantes*

### 1.3.6 Libellés

Labels are used to categorize strings within a project to further customize the localization workflow (for example to define categories of strings).

Following labels are used by Weblate :

**Traduit automatiquement** String was translated using *Traduction automatique*.

**La source doit être vérifiée** String was marked for review using *Source strings reviews*.

**Voir aussi :**

labels

### 1.3.7 Traduction

On the translation page, the source string and an editing area for its translation are shown. Should the translation be plural, multiple source strings and editing areas are shown, each described and labeled in the amount of plural forms the translated language has.

Tous les caractères blancs spéciaux sont soulignés en rouge et indiqués par des symboles gris. Les espaces consécutives sont également soulignées en rouge pour alerter le traducteur d'un éventuel problème de formatage.

Various bits of extra info can be shown on this page, most of which coming from the project source code (like context, comments or where the message is being used). Translation fields for any secondary languages translators select in the preferences will be shown (see *Langues secondaires*) above the source string.

Below the translation, translators will find suggestion made by others, to be accepted (✓), accepted with changes (⇒), or deleted (🗑).

### Pluriels

Words changing form to account of their numeric designation are called plurals. Each language has its own definition of plurals. English, for example, supports one. In the singular definition of for example « car », implicitly one car is referenced, in the plural definition, « cars » two or more cars are referenced (or the concept of cars as a noun). Languages like for example Czech or Arabic have more plurals and also their rules for plurals are different.

Weblate has full support for each of these forms, in each respective language (by translating every plural separately). The number of fields and how it is in turn used in the translated application or project depends on the configured plural formula. Weblate shows the basic info, and the [Language Plural Rules](#) by the Unicode Consortium is a more detailed description.

#### **Voir aussi :**

*Forme plurielle*

[Dashboard](#)
[Projects](#)
[Languages](#)
[Checks](#)

[WeblateOrg](#) / [Django](#) / [Czech](#) / [Translate](#)
translated 96%

[1 <](#)
[1 / 1](#)
[>](#)

[Custom search](#)

Zen

[Position and priority](#)

Translation

English

Singular

%{(count)s word

Plural

%{(count)s words

Czech, One

%{(count)s slovo

Czech, Few

%{(count)s slova

Czech, Other

%{(count)s slov

Plural formula: (n==1) ? 0 : (n>=2 && n<=4) ? 1 : 2

☐ Needs editing

Save and continue

Save and stay

Suggest

Skip

[Nearby strings](#) 20
 [Comments](#)
[Automatic suggestions](#)
[Other languages](#) 3

History

New comment

Comment on this string for fellow translators and developers to read.

**Scope**

Translation comment, discussions with other translators

Is your comment specific to this translation or generic for all of them?

**New comment**

You can use Markdown and mention users by @username.

Save

Glossary

English

Czech

No related strings found in the glossary.

+ Add term to glossary

String information

Screenshot context

No screenshot currently associated.

+ Add screenshot

Explanation

No explanation currently provided.

Labels

No labels currently set.

Flags

python-format

Source string location

weblate/templates/translation.html:149

String age

5 seconds ago

Source string age

6 seconds ago

Translation file

weblate/locale/cs/LC\_MESSAGE S/django.po, string 5

Powered by Weblate 4.11

[About Weblate](#)
[Legal](#)
[Contact](#)
[Documentation](#)
[Donate to Weblate](#)

## Raccourcis clavier

Modifié dans la version 2.18 : Les raccourcis clavier ont été réorganisés dans la version 2.18 pour éviter toute collision avec les paramètres par défaut du navigateur ou du système d'exploitation.

Les raccourcis clavier suivants peuvent être utilisés lors de la traduction :

Raccourcis clavier	Description
Alt+Home	Naviguer vers la première traduction dans la recherche en cours.
Alt+End	Naviguer jusqu'à la dernière traduction dans la recherche en cours.
Alt+PageUp or Ctrl+↑ or Alt+↑ or Cmd+↑	Naviguer vers la traduction précédente dans la recherche en cours.
Alt+PageDown or Ctrl+↓ or Alt+↓ or Cmd+↓	Naviguer vers la traduction suivante dans la recherche en cours.
Alt+Enter or Ctrl+Enter or Cmd+Enter	Submit current form, while editing translation this is same as pressing <i>Save and continue</i> .
Ctrl+Shift+Enter or Cmd+Shift+Enter	Unmark translation as needing edit and submit it.
Ctrl+E or Cmd+E	Placer le focus dans l'éditeur de traduction.
Ctrl+U or Cmd+U	Placer le focus dans l'éditeur de commentaire.
Ctrl+M or Cmd+M	Affiche l'onglet <i>Automatic suggestions</i> , consultez <i>Suggestions automatiques</i> .
Ctrl+1 to Ctrl+9 or Cmd+1 to Cmd+9	Copie l'élément numéroté depuis la chaîne source.
Ctrl+M+1 to 9 or Cmd+M+1 to 9	Copie la traduction automatique du numéro donné dans la traduction actuelle.
Ctrl+I+1 to 9 or Cmd+I+1 to 9	Ignorer un élément de la liste des contrôles de qualité défaillants.
Ctrl+J or Cmd+J	Affiche l'onglet <i>Chaînes à proximité</i> .
Ctrl+S or Cmd+S	Focus search field.
Ctrl+O or Cmd+O	Copy source string.
Ctrl+Y or Cmd+Y	Toggle the <i>Needs editing</i> flag.

## Clavier visuel

A small visual keyboard row is shown just above the translation field. This can be useful to keep local punctuation in mind (as the row is local to each language), or have characters otherwise hard to type handy.

Les symboles affichés se répartissent en trois catégories :

- Les caractères configurés par l'utilisateur définis dans le fichier *Profil utilisateur*
- Les caractères par langue fournis par Weblate (par exemple, les guillemets ou les caractères spécifiques à RTL)
- Les caractères configurés en utilisant *SPECIAL\_CHARS*

Weblate
 Dashboard Projects Languages Checks

WeblateOrg / Django / Hebrew / Translate
 translated 92%

1 / 26
All strings
Zen

Position and priority

Translation

English  
Files

Hebrew
 ⌨
↵
NBS
...
"
'
"
'
-
-
-
ZWNJ
ZWJ
LRM
RLM
LRE
RLE
PDF
LRO
RLO

☐ Needs editing
 5/100 · 5
RTL
LTR

Save and continue
Save and stay
Suggest
Skip

Nearby strings 16
 Comments
 Automatic suggestions
 Other languages 3

History

Language	Target string
Czech	Soubory
Hungarian	Fájlok
English	Files

Glossary

English Hebrew  
 No related strings found in the glossary.  
 Add term to glossary

String information

Screenshot context  
 No screenshot currently associated.  
 Add screenshot

Explanation  
 No explanation currently provided.

Labels  
 No labels currently set.

Flags  
 No flags currently set.

Source string location  
 weblate/templates/translation.html:45 ·  
 weblate/trans/forms.py:1404

String age  
 11 seconds ago

Source string age  
 12 seconds ago

Translation file  
 weblate/locale/he/LC\_MESSAGES/django.po, string 1

Powered by Weblate 4.11
 About Weblate
 Legal
 Contact
 Documentation
 Donate to Weblate

1.3. Traduction à l'aide de Weblate

17

## Contexte de traduction

This contextual description provides related info about the current string.

**Attributs de la chaîne** Des éléments comme l’ID de message, le contexte (`msgctxt`) ou l’emplacement dans le code source.

**Captures d’écran** Des captures d’écran peuvent être téléversées sur Weblate pour mieux informer les traducteurs sur l’endroit et de la manière dont la chaîne est utilisée, voir [Visual context for strings](#).

**Chaînes à proximité** Affiche les messages à proximité dans le fichier de traduction. Ils sont généralement utilisés dans un contexte similaire et s’avèrent utiles pour maintenir la cohérence de la traduction.

**Autres occurrences** Dans le cas où un message apparaît à plusieurs endroits (par exemple, plusieurs composants), cet onglet les affiche tous s’ils sont jugés incohérents (voir [Incohérence](#)). Vous pouvez choisir lequel utiliser.

**Mémoire de traduction** Regarder les chaînes de caractères similaires traduites dans le passé, voir [Mémoire de traduction](#).

**Glossaire** Affiche les termes du glossaire du projet utilisés dans le message actuel.

**Modifications récentes** Liste des personnes qui ont récemment modifié ce message en utilisant Weblate.

**Projet** Project info like instructions for translators, or a directory or link to the string in the version control system repository the project uses.

If you want direct links, the translation format has to support it.

## Historique de la traduction

Chaque modification est enregistrée par défaut (sauf si désactivé dans les paramètres du composant) dans la base de données, et peut être annulée. En option, il est également possible d’annuler toute modification dans le système de contrôle de version sous-jacent.

## Longueur de la chaîne traduite

Weblate can limit the length of a translation in several ways to ensure the translated string is not too long :

- The default limitation for translation is ten times longer than the source string. This can be turned off by `LIMIT_TRANSLATION_LENGTH_BY_SOURCE_LENGTH`. In case you are hitting this, it might be also caused by a monolingual translation erroneously set up as bilingual one, making Weblate mistaking the translation key for the actual source string. See [Formats monolingues et bilingues](#) for more info.
- Longueur maximale en caractères définie par le fichier de traduction ou le drapeau, voir [Taille maximum de la traduction](#).
- Taille maximale du rendu en pixels définie par des drapeaux, voir [Taille maximale de la traduction](#).

### 1.3.8 Suggestions automatiques


Based on configuration and your translated language, Weblate provides suggestions from several machine translation tools and [Mémoire de traduction](#). All machine translations are available in a single tab of each translation page.

**Voir aussi :**

Vous pouvez trouver la liste des outils pris en charge dans [Traduction automatisée](#).

### 1.3.9 Traduction automatique

Vous pouvez utiliser la traduction automatique pour amorcer une traduction basée sur des sources externes. Cet outil s'appelle *Traduction automatique* accessible dans le menu *Outils*, une fois que vous avez sélectionné un composant et une langue :

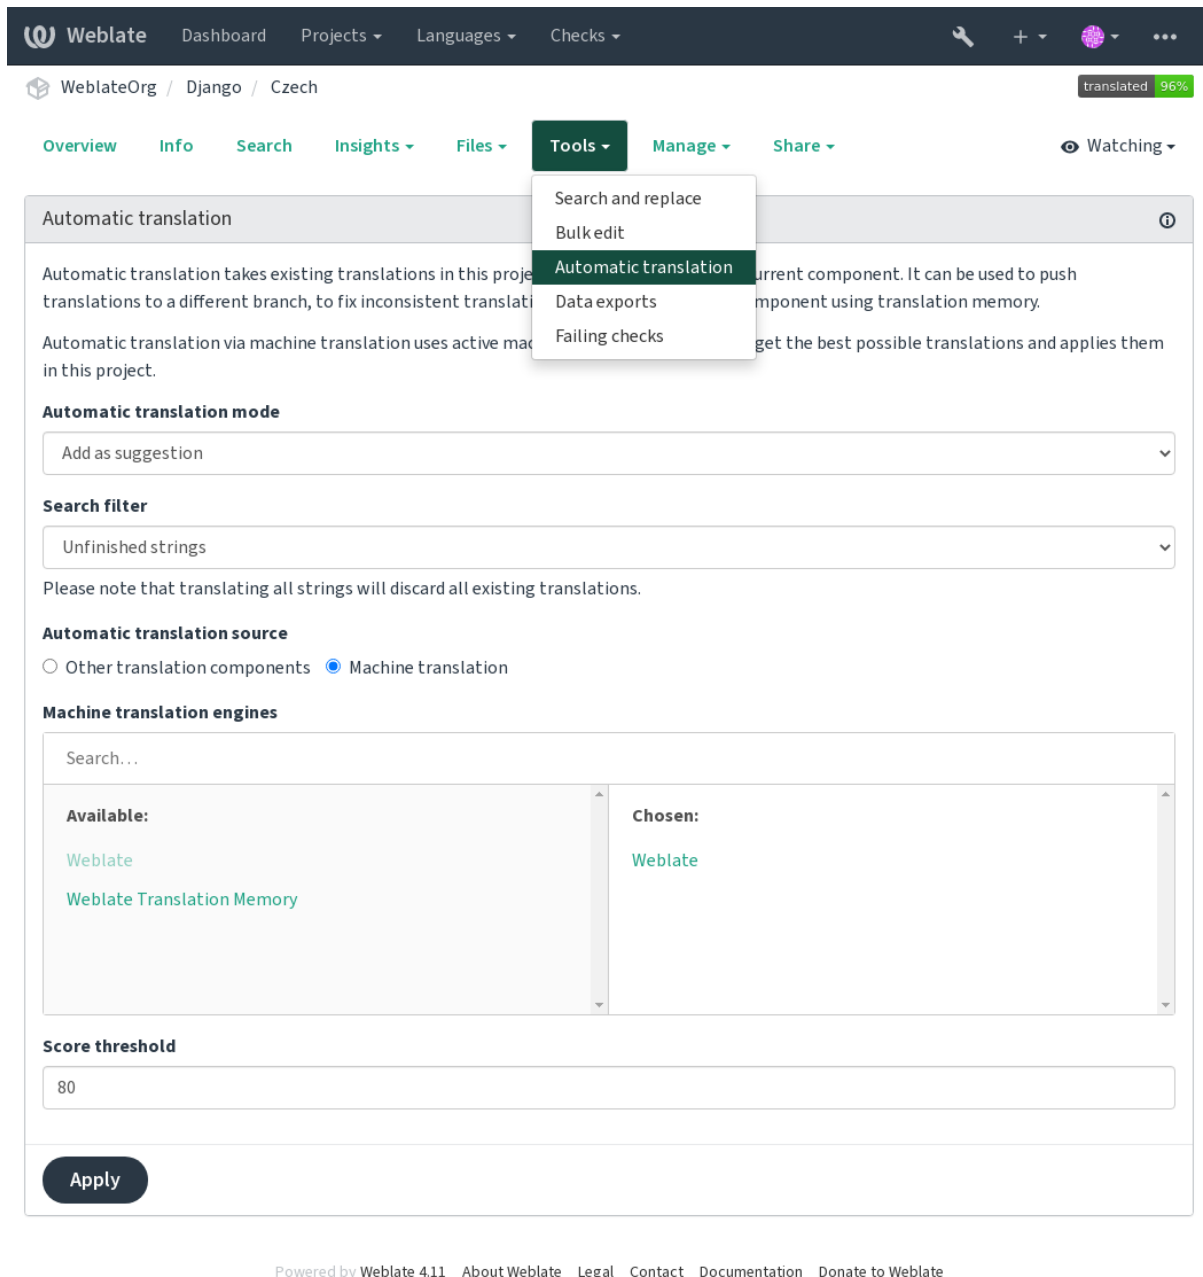

Deux modes de fonctionnement sont possibles :

- Utilisation d'autres composants Weblate comme source de traduction.
- Utilisation de services de traduction automatique sélectionnés avec des traductions atteignant un certain seuil de qualité.

Vous pouvez également choisir les chaînes de caractères qui doivent être traduites automatiquement.

**Avertissement :** Soyez conscient que cela remplacera les traductions existantes si elles sont utilisées avec des filtres larges tels que *Toutes les chaînes*.

Useful in several situations like consolidating translation between different components (for example the application and its website) or when bootstrapping a translation for a new component using existing translations (translation memory).

The automatically translated strings are labelled by *Automatically translated*.

**Voir aussi :**

*Keeping translations same across components*

### 1.3.10 Limite de requêtes

To avoid abuse of the interface, rate limiting is applied to several operations like searching, sending contact forms or translating. If affected by it, you are blocked for a certain period until you can perform the operation again.

Default limits and fine-tuning is described in the administrative manual, see *Limite de requêtes*.

### 1.3.11 Rechercher et remplacer

Change terminology effectively or perform bulk fixing of the strings using *Search and replace* in the *Tools* menu.

---

**Indication :** Rassurez-vous, il n'y a aucun risque de causer des dommages. Il s'agit d'un processus à deux étapes affichant d'abord un aperçu des chaînes modifiées avant que les modifications ne soient confirmées.

---

### 1.3.12 Modification en masse

Bulk editing allows performing one operation on number of strings. You define strings by searching for them and set up something to be done for matching ones. The following operations are supported :

- Changement de l'état des chaînes (par exemple pour approuver toutes les chaînes non révisées).
- Ajustement des drapeaux de traduction (voir *Customizing behavior using flags*)
- Ajustement des libellés de chaînes de caractères (voir labels)

---

**Indication :** This tool is called *Bulk edit* accessible in the *Tools* menu of each project, component or translation.

---

**Voir aussi :**

*Bulk edit add-on*

### 1.3.13 Matrix View

To compare different languages efficiently you can use the matrix view. It is available on every component page under the *Tools* menu. First select all languages you want to compare and confirm your selection, after that you can click on any translation to open and edit it quickly.

The matrix view is also a very good starting point to find missing translations in different languages and quickly add them from one view.



### 1.3.14 Zen Mode

The Zen editor can be enabled by clicking the *Zen* button on the top right while translating a component. It simplifies the layout and removes additional UI elements such as *Nearby strings* or the *Glossary*.

You can select the Zen editor as your default editor using the *Préférences* tab on your *Profil utilisateur*. Here you can also choose between having translations listed *Top to bottom* or *Side by side* depending on your personal preference.

## 1.4 Téléchargement et téléversement des traductions

You can export files from a translation, make changes, and import them again. This allows working offline, and then merging changes back into the existing translation. This works even if it has been changed in the meantime.

---

**Note :** Available options might be limited by *access control* settings.

---

### 1.4.1 Downloading translations

From the project or component dashboard, translatable files can be downloaded in the *Files* menu.

The first option is to download the file in the original format as it is stored in the repository. In this case, any pending changes in the translation are getting committed and the up-to-date file is yield without any conversions.

You can also download the translation converted into one of the widely used localization formats. The converted files will be enriched with data provided in Weblate ; such as additional context, comments or flags. Several file formats are available via the *Files* ↓ *Customize download* menu :

- gettext PO
- XLIFF avec extensions gettext
- XLIFF 1.1
- TermBase eXchange
- Translation Memory eXchange
- gettext MO (only available when translation is using gettext PO)
- CSV
- Excel Open XML
- JSON (only available for monolingual translations)
- Android String Resource (only available for monolingual translations)
- iOS strings (only available for monolingual translations)

---

**Indication :** The content available in the converted files differs based on file format features, you can find overview in *Fonctionnalités des types de traduction*.

---

Weblate
Dashboard
Projects
Languages
Checks

WeblateOrg / Django / Czech

translated 96%

Overview
Info
Search
Insights
Files
Tools
Manage
Share
Watching

Quick downloads

Download translation
Customize download
Upload translation

26	File in original format as translated in the repository									gettext PO file
26	All strings, converted files enriched with comments; suitable for offline translation	CSV	gettext MO	gettext PO	TBX	TMX	XLIFF 1.1 with gettext extensions	XLIFF 1.1	XLSX	
1	Unfinished strings, converted files enriched with comments; suitable for offline translation	CSV	gettext MO	gettext PO	TBX	TMX	XLIFF 1.1 with gettext extensions	XLIFF 1.1	XLSX	

Customize download

All strings

File format
☒ gettext PO
☐ XLIFF 1.1 with gettext extensions
☐ XLIFF 1.1
☐ TBX
☐ TMX
☐ gettext MO
☐ CSV
☐ XLSX
☐ JSON
☐ Android String Resource
☐ iOS strings

Download

Powered by Weblate 4.11
About Weblate
Legal
Contact
Documentation
Donate to Weblate

## Voir aussi :

GET `/api/translations/(string:project)/(string:component)/(string:language)/file/`

## 1.4.2 Uploading translations

When you have made your changes, use *Upload translation* in the *Files* menu.

Upload

The uploaded file will be merged with the current translation. If you want to overwrite already translated strings, don't forget to turn it on.

**File**

Choose File No file chosen

**File upload mode**

☐ Add as translation  
☐ Add as suggestion  
☐ Add as translation needing edit  
☐ Replace existing translation file

**Processing of strings needing edit**

Do not import

**Conflict handling**

Update translated strings

Whether to overwrite existing translations if the string is already translated.

**Author name**

Weblate Test

**Author e-mail**

weblate@example.org

Upload

Powered by Weblate 4.11 [About Weblate](#) [Legal](#) [Contact](#) [Documentation](#) [Donate to Weblate](#)

## Formats de fichiers pris en charge

Any file in a supported file format can be uploaded, but it is still recommended to use the same file format as the one used for translation, otherwise some features might not be translated properly.

### Voir aussi :

*Formats de fichiers pris en charge, Téléchargement et téléversement des traductions*

## Import methods

These are the choices presented when uploading translation files :

**Ajouter comme traduction (translate)** Imported strings are added as translations to existing strings. This is the most common usecase, and the default behavior.

Only translations are used from the uploaded file and no additional content.

**Ajouter comme suggestion (suggest)** Imported strings are added as suggestions, do this when you want to have your uploaded strings reviewed.

Only translations are used from the uploaded file and no additional content.

**Ajouter comme traduction à vérifier (fuzzy)** Imported strings are added as translations needing edit. This can be useful when you want translations to be used, but also reviewed.

Only translations are used from the uploaded file and no additional content.

**Remplacer le fichier de traduction existant (replace)** Existing file is replaced with new content. This can lead to loss of existing translations, use with caution.

**Mettre à jour les chaînes sources (source)** Updates source strings in bilingual translation file. This is similar to what *Mettre à jour les fichiers PO afin qu'ils correspondent au POT (msgmerge)* does.

This option is supported only for some file formats.

**Add new strings (add)** Adds new strings to the translation. It skips the one which already exist.

In case you want to both add new strings and update existing translations, upload the file second time with *Add as translation*.

This option is available only with *Gérer les chaînes* turned on.

Only source, translation and key (context) are used from the uploaded file.

**Voir aussi :**

```
POST /api/translations/(string:project)/(string:component)/(string:language)/file/
```

## Conflicts handling

Defines how to deal with uploaded strings which are already translated.

## Strings needing edit

There is also an option for how to handle strings needing edit in the imported file. Such strings can be handle in one of the three following ways : « Do not import », « Import as string needing edit », or « Import as translated ».

## Overriding authorship

With admin permissions, you can also specify authorship of uploaded file. This can be useful in case you've received the file in another way and want to merge it into existing translations while properly crediting the actual author.

# 1.5 Glossaire

Each project can include one or more glossaries as a shorthand for storing terminology. Glossary easify maintaining consistency of the translation.

A glossary for each language can be managed on its own, but they are stored together as a single component which helps project admins and multilingual translators to maintain some cross-language consistency as well. Terms from the glossary containing words from the currently translated string are displayed in the sidebar of the translation editor.

## 1.5.1 Gestion des glossaires

Modifié dans la version 4.5 : Glossaries are now regular translation components and you can use all Weblate features on them — commenting, storing in a remote repository, or adding explanations.

Use any component as a glossary by turning on *Utiliser comme glossaire*. You can create multiple glossaries for one project.

An empty glossary for a given project is automatically created with the project. Glossaries are shared among all components of the same project, and optionally with other projects using *Partager dans les projets* from the respective glossary component.

The glossary component looks like any other component in Weblate with added colored label :

The screenshot shows the Weblate interface for a glossary. The top navigation bar includes 'Weblate', 'Dashboard', 'Projects', 'Languages', and 'Checks'. The breadcrumb trail is 'WeblateOrg / Glossary WeblateOrg / Czech'. The 'Overview' tab is selected, showing 'Translation status' with 2 Strings and 3 Words at 100% completion. Buttons for 'Add new glossary term', 'Browse', and 'Translate' are present. Below, 'Strings status' shows 2 All strings and 2 Translated strings, each with 'Browse', 'Translate', and 'Zen' links. The 'Other components' table lists 'Django' (96% translated, 1 unfinished word, 12 unfinished words, 3 checks) and 'Language names' (100% translated). A 'Browse all components' button is at the bottom.

Translation status

2 Strings 100%

3 Words 100%

Add new glossary term Browse Translate

Strings status

2 All strings — 3 words Browse Translate Zen

2 Translated strings — 3 words Browse Translate Zen

Other components

Component	Translated	Unfinished	Unfinished words	Checks	Suggestions	Comments
Django	96%	1	12	3		
Language names	✓					

Browse all components

Powered by Weblate 4.11 About Weblate Legal Contact Documentation Donate to Weblate

Vous pouvez parcourir tous les termes du glossaire :

The screenshot shows the 'Browse' view of the glossary. The breadcrumb trail is 'WeblateOrg / Glossary WeblateOrg / Czech / Browse'. Navigation controls include 'All strings', 'Source string', and 'Add new glossary term'. The table displays two rows: 'machine translation' (English) translated to 'strojový překlad' (Czech), and 'project' (English) translated to 'projekt' (Czech).

English Czech

machine translation strojový překlad

project projekt

Powered by Weblate 4.11 About Weblate Legal Contact Documentation Donate to Weblate

ou les modifier comme n'importe quelle traduction.

## 1.5.2 Glossary terms

Les termes du glossaire sont traduits de la même manière que les chaînes de caractères ordinaires. Vous pouvez activer des fonctionnalités supplémentaires en utilisant le menu *Outils* pour chaque terme.

The screenshot displays the Weblate web interface for editing a glossary term. The top navigation bar includes 'Weblate', 'Dashboard', 'Projects', 'Languages', and 'Checks'. The breadcrumb trail shows 'WeblateOrg / Glossary / WeblateOrg / Czech / Translate'. The main editor area is titled 'Glossary term' and contains fields for 'English' (with the value 'project'), 'Czech' (with the value 'projekt'), and an 'Explanation' field. A 'Needs editing' checkbox is present. Below the fields are buttons for 'Save and continue', 'Save and stay', 'Suggest', 'Skip', and 'Tools'. The 'Tools' dropdown menu is open, showing options: 'Delete string', 'Mark as read-only', 'Mark as forbidden translation', 'Mark as terminology', and 'Add variant of this string'. The sidebar on the right includes a 'Glossary' section with a search bar and a table of terms, and a 'String information' section showing 'String age' and 'Source string age' as 'a second ago'. The bottom of the page features a footer with 'Powered by Weblate 4.11' and links to 'About Weblate', 'Legal', 'Contact', 'Documentation', and 'Donate to Weblate'.

Powered by Weblate 4.11 [About Weblate](#) [Legal](#) [Contact](#) [Documentation](#) [Donate to Weblate](#)

## Untranslatable terms

Nouveau dans la version 4.5.

Flagging certain glossary term translations `read-only` by bulk-editing, typing in the flag, or by using *Tools* ↓ *Mark as read-only* means they can not be translated. Use this for brand names or other terms that should not be changed in other languages. Such terms are visually highlighted in the glossary sidebar.

**Voir aussi :**

*Customizing behavior using flags*

## Forbidden translations

Nouveau dans la version 4.5.

Flagging certain glossary term translations as `forbidden`, by bulk-editing, typing in the flag, or by using *Tools* ↓ *Mark as forbidden translation* means they are **not** to be used. Use this to clarify translation when some words are ambiguous or could have unexpected meanings.

**Voir aussi :**

*Customizing behavior using flags*

## Terminologie

Nouveau dans la version 4.5.

Flagging certain glossary terms as `terminology` by bulk-editing, typing in the flag, or by using *Tools* ↓ *Mark as terminology* adds entries for them to all languages in the glossary. Use this for important terms that should be well thought out, and retain a consistent meaning across all languages.

**Voir aussi :**

*Customizing behavior using flags*

## Variantes

Variants are a generic way to group strings together. All term variants are listed in the glossary sidebar when translating.

---

**Indication :** You can use this to add abbreviations or shorter expressions for a term.

---

**Voir aussi :**

variants

## 1.6 Contrôles de qualité et corrections

The quality checks help catch common translator errors, ensuring the translation is in good shape. The checks can be ignored in case of false positives.

Once submitting a translation with a failing check, this is immediately shown to the user :

Weblate
Dashboard
Projects
Languages
Checks

WebOrg / Django / Czech / Translate

translated 96%

The translation has been saved, however there are some newly failing checks: Missing plurals, Python format

<

<

1/1

>

>

Custom search

'%(count)s word'

Position

⚡ Zen

⌵

Translation

English

Singular

%(count)s word

Plural

%(count)s words

Czech, One

Czech, Few

několik slov

Czech, Other

%(count)s slov

Plural formula: (n==1) ? 0 : (n>=2 && n<=4) ? 1 : 2

☐ Needs editing

Save and continue

Save and stay

Suggest

Skip

Nearby strings 20

Comments

Automatic suggestions

Other languages 3

History

New comment

Comment on this string for fellow translators and developers to read.

Scope

Translation comment, discussions with other translators

Is your comment specific to this translation or generic for all of them?

New comment

You can use Markdown and mention users by @username.

Save

Things to check

Python format 1

Following format strings are missing: %(count)s

Dismiss

☐ For all languages

Missing plurals 2

Some plural forms are untranslated

Dismiss

☐ For all languages

Glossary

EnglishCzech

No related strings found in the glossary.

Add term to glossary

String information

Screenshot context

No screenshot currently associated.

Add screenshot

Explanation

No explanation currently provided.

Labels

No labels currently set.

Flags

python-format

Source string location

weblate/templates/translation.html:149

String age

9 seconds ago

Source string age

9 seconds ago

Translation file

weblate/locale/cs/LC\_MESSAGES/django.po, string 5

pending

Powered by Weblate 4.11 About Weblate Legal Contact Documentation Donate to Weblate

28

Chapitre 1. Documentation pour l'utilisateur



### 1.6.1 Automatic fixups

In addition to *Quality checks*, Weblate can fix some common errors in translated strings automatically. Use it with caution to not have it add errors.

**Voir aussi :**

*AUTOFIX\_LIST*

### 1.6.2 Quality checks

Weblate employs a wide range of quality checks on strings. The following section describes them all in further detail. There are also language specific checks. Please file a bug if anything is reported in error.

**Voir aussi :**

*CHECK\_LIST*, *Customizing behavior using flags*

### 1.6.3 Translation checks

Executed upon every translation change, helping translators maintain good quality translations.

#### Balisage BBCode

**Summary** Les BBcodes dans la traduction ne correspondent pas à la source

**Portée** translated strings

**Check class** `weblate.checks.markup.BBCodeCheck`

**Flag to ignore** `ignore-bbcode`

BBCode represents simple markup, like for example highlighting important parts of a message in bold font, or italics. This check ensures they are also found in translation.

---

**Note :** The method for detecting BBCode is currently quite simple so this check might produce false positives.

---

#### Répétition de mots

Nouveau dans la version 4.1.

**Summary** Le texte contient une répétition du même mot deux fois de suite :

**Portée** translated strings

**Check class** `weblate.checks.duplicate.DuplicateCheck`

**Flag to ignore** `ignore-duplicate`

Checks that no consecutive duplicate words occur in a translation. This usually indicates a mistake in the translation.

---

**Indication :** This check includes language specific rules to avoid false positives. In case it triggers falsely in your case, let us know. See *Reporting issues in Weblate*.

---

## Non conforme au glossaire

Nouveau dans la version 4.5.

**Summary** La traduction ne respecte pas les termes du glossaire.

**Portée** translated strings

**Check class** `weblate.checks.glossary.GlossaryCheck`

**Flag to enable** `check-glossary`

**Flag to ignore** `ignore-check-glossary`

This check has to be turned on using `check-glossary` flag (see [Customizing behavior using flags](#)). Please consider following prior to enabling it :

- It does exact string matching, the glossary is expected to contain terms in all variants.
- Checking each string against glossary is expensive, it will slow down any operation in Weblate which involves running checks like importing strings or translating.

**Voir aussi :**

*Glossaire, Customizing behavior using flags, Drapeaux de traduction*

## Double espace

**Summary** La traduction contient un double espace

**Portée** translated strings

**Check class** `weblate.checks.chars.DoubleSpaceCheck`

**Flag to ignore** `ignore-double-space`

Checks that double space is present in translation to avoid false positives on other space-related checks.

Check is false when double space is found in source meaning double space is intentional.

## Formatted strings

Checks that formatting in strings are replicated between both source and translation. Omitting format strings in translation usually causes severe problems, so the formatting in strings should usually match the source.

Weblate supports checking format strings in several languages. The check is not enabled automatically, only if a string is flagged appropriately (e.g. *c-format* for C format). Gettext adds this automatically, but you will probably have to add it manually for other file formats or if your PO files are not generated by **xgettext**.

This can be done per unit (see [Additional info on source strings](#)) or in [Configuration des composants](#). Having it defined per component is simpler, but can lead to false positives in case the string is not interpreted as a formatting string, but format string syntax happens to be used.

---

**Indication :** In case specific format check is not available in Weblate, you can use generic [Balises de remplacement](#).

---

Besides checking, this will also highlight the formatting strings to easily insert them into translated strings :

Weblate
Dashboard
Projects ▾
Languages ▾
Checks ▾

WeblateOrg / Django / Czech / Translate

translated 96%

K

<

1/1

>

>I

Custom search ▾
'%(count)s word'

Zen

Position and priority ▾

Translation

English

Singular

%(count)s word

Plural

%(count)s words

Czech, One

%(count)s slovo

Czech, Few

%(count)s slova

Czech, Other

%(count)s slov

Plural formula: (n==1) ? 0 : (n>=2 && n<=4) ? 1 : 2

☐ Needs editing

Save and continue

Save and stay

Suggest

Skip

Nearby strings 20

Comments

Automatic suggestions

Other languages 3

History

None

String updated in the repository

WeblateOrg / Django — Czech

English

Singular

%(count)s word

Plural

%(count)s words

Czech Translated

One

%(count)s slovo

Few

%(count)s slova

Other

%(count)s slov

5 seconds ago

Browse all component changes

Glossary

English

Czech

No related strings found in the glossary.

+ Add term to glossary

String information

Screenshot context

No screenshot currently associated.

+ Add screenshot

Explanation

No explanation currently provided.

Labels

No labels currently set.

Flags

python-format

Source string location

weblate/templates/translation.html:149

String age

5 seconds ago

Source string age

6 seconds ago

Translation file

weblate/locale/cs/LC\_MESSAGE\_S/django.po, string 5

Powered by Weblate 4.11 About Weblate Legal Contact Documentation Donate to Weblate

1.6. Contrôles de qualité et corrections

31

## Chaîne d'interpolation AngularJS

**Summary** Les chaînes d'interpolation AngularJS ne correspondent pas à la source

**Portée** translated strings

**Check class** `weblate.checks.angularjs.AngularJSInterpolationCheck`

**Flag to enable** `angularjs-format`

**Flag to ignore** `ignore-angularjs-format`

**Named format string example** Votre solde est `{{amount}}` `{{ currency }}`

**Voir aussi :**

*Formatted strings*, [AngularJS text interpolation](#)

## Format C

**Summary** La chaîne de format C ne correspond pas à celle de la source

**Portée** translated strings

**Check class** `weblate.checks.format.CFormatCheck`

**Flag to enable** `c-format`

**Flag to ignore** `ignore-c-format`

**Simple format string example** Il y a `%d` pommes

**Position format string example** Votre solde est `%1$d` `%2$s`

**Voir aussi :**

*Formatted strings*, [C format strings](#), [C printf format](#)

## Format C#

**Summary** La chaîne au format C# ne correspond pas à celle de la source

**Portée** translated strings

**Check class** `weblate.checks.format.CSharpFormatCheck`

**Flag to enable** `c-sharp-format`

**Flag to ignore** `ignore-c-sharp-format`

**Position format string example** Il y a `{0}` pommes

**Voir aussi :**

*Formatted strings*, [C# String Format](#)

## Modèle de littéraux ECMAScript

**Summary** Les modèles littéraux ECMAScript ne correspondent pas à la source

**Portée** translated strings

**Check class** `weblate.checks.format.ESTemplateLiteralsCheck`

**Flag to enable** `es-format`

**Flag to ignore** `ignore-es-format`

**Interpolation example** Il y a `${number}` pommes

**Voir aussi :**

*Formatted strings*, [Template literals](#)

## Interpolation i18next

Nouveau dans la version 4.0.

**Summary** L'interpolation i18next ne correspond pas à la source

**Portée** translated strings

**Check class** `weblate.checks.format.I18NextInterpolationCheck`

**Flag to enable** `i18next-interpolation`

**Flag to ignore** `ignore-i18next-interpolation`

**Interpolation example** Il y a {{number}} pommes

**Nesting example** Il y a \$t(number) pommes

**Voir aussi :**

*Formatted strings, i18next interpolation*

## ICU MessageFormat

Nouveau dans la version 4.9.

**Summary** Erreurs de syntaxe et/ou incohérence de caractère de remplacement dans les chaînes ICU MessageFormat.

**Portée** translated strings

**Check class** `weblate.checks.icu.ICUMessageFormatCheck`

**Flag to enable** `icu-message-format`

**Flag to ignore** `ignore-icu-message-format`

**Interpolation example** There {number, plural, one {is one apple} other {are # apples}}.

This check has support for both pure ICU MessageFormat messages as well as ICU with simple XML tags. You can configure the behavior of this check by using `icu-flags:*`, either by opting into XML support or by disabling certain sub-checks. For example, the following flag enables XML support while disabling validation of plural sub-messages :

<code>xml</code>	Enable support for simple XML tags. By default, XML tags are parsed loosely. Stray < characters are ignored if they are not reasonably part of a tag.
<code>strict-xml</code>	Enable support for strict XML tags. All < characters must be escaped if they are not part of a tag.
<code>-highlight</code>	Disable highlighting placeholders in the editor.
<code>-require_other</code>	Disable requiring sub-messages to have an <code>other</code> selector.
<code>-submessage_selector</code>	Skip checking that sub-message selectors match the source.
<code>-types</code>	Skip checking that placeholder types match the source.
<code>-extra</code>	Skip checking that no placeholders are present that were not present in the source string.
<code>-missing</code>	Skip checking that no placeholders are missing that were present in the source string.

Additionally, when `strict-xml` is not enabled but `xml` is enabled, you can use the `icu-tag-prefix:PREFIX` flag to require that all XML tags start with a specific string. For example, the following flag will only allow XML tags to be matched if they start with `<x:`  :

This would match `<x:link>click here</x:link>` but not `<strong>this</strong>`.

**Voir aussi :**

*Syntaxe ICU MessageFormat, Formatted strings, ICU : Formatting Messages, Format.JS : Message Syntax*

## Format Java

**Summary** La chaîne au format Java ne correspond pas à celle de la source

**Portée** translated strings

**Check class** `weblate.checks.format.JavaFormatCheck`

**Flag to enable** `java-format`

**Flag to ignore** `ignore-java-format`

**Simple format string example** Il y a %d pommes

**Position format string example** Votre solde est %1\$d %2\$s

**Voir aussi :**

*Formatted strings*, [Java Format Strings](#)

## MessageFormat Java

**Summary** La chaîne MessageFormat Java ne correspond pas à celle de la source

**Portée** translated strings

**Check class** `weblate.checks.format.JavaMessageFormatCheck`

**Flag to enable unconditionally** `java-messageformat`

**Flag to enable autodetection** `auto-java-messageformat` enables check only if there is a format string in the source

**Flag to ignore** `ignore-java-messageformat`

**Position format string example** Il y a {0} pommes

**Voir aussi :**

*Formatted strings*, [Java MessageFormat](#)

## Format JavaScript

**Summary** La chaîne de format JavaScript ne correspond pas à celle de la source

**Portée** translated strings

**Check class** `weblate.checks.format.JavaScriptFormatCheck`

**Flag to enable** `javascript-format`

**Flag to ignore** `ignore-javascript-format`

**Simple format string example** Il y a %d pommes

**Voir aussi :**

*Formatted strings*, [JavaScript formatting strings](#)

## Format Lua

**Summary** La chaîne de format Lua ne correspond pas à celle de la source

**Portée** translated strings

**Check class** `weblate.checks.format.LuaFormatCheck`

**Flag to enable** `lua-format`

**Flag to ignore** `ignore-lua-format`

**Simple format string example** Il y a %d pommes

**Voir aussi :**

*Formatted strings*, [Lua formatting strings](#)

## Format Pascal objet

**Summary** La chaîne au format Pascal objet ne correspond pas à la source

**Portée** translated strings

**Check class** `weblate.checks.format.ObjectPascalFormatCheck`

**Flag to enable** `object-pascal-format`

**Flag to ignore** `ignore-object-pascal-format`

**Simple format string example** Il y a %d pommes

**Voir aussi :**

*Formatted strings*, *Object Pascal formatting strings*, *Free Pascal formatting strings* *Delphi formatting strings*

## Balises de remplacement par caractères pour cent

Nouveau dans la version 4.0.

**Summary** Les balises de remplacement par caractères pour cent ne correspondent pas à la source

**Portée** translated strings

**Check class** `weblate.checks.format.PercentPlaceholdersCheck`

**Flag to enable** `percent-placeholders`

**Flag to ignore** `ignore-percent-placeholders`

**Simple format string example** Il y a %number% pommes

**Voir aussi :**

*Formatted strings*,

## Format Perl

**Summary** La chaîne au format Perl ne correspond pas à la source

**Portée** translated strings

**Check class** `weblate.checks.format.PerlFormatCheck`

**Flag to enable** `perl-format`

**Flag to ignore** `ignore-perl-format`

**Simple format string example** Il y a %d pommes

**Position format string example** Votre solde est %1\$d %2\$s

**Voir aussi :**

*Formatted strings*, *Perl sprintf*, *Perl Format Strings*

## Format PHP

**Summary** La chaîne de format PHP ne correspond pas à celle de la source

**Portée** translated strings

**Check class** `weblate.checks.format.PHPFormatCheck`

**Flag to enable** `php-format`

**Flag to ignore** `ignore-php-format`

**Simple format string example** Il y a %d pommes

**Position format string example** Votre solde est %1\$d %2\$s

**Voir aussi :**

*Formatted strings*, *PHP sprintf documentation*, *PHP Format Strings*

## Format d'accolade Python

**Summary** La chaîne de format python ne correspond pas à celui de la source

**Portée** translated strings

**Check class** `weblate.checks.format.PythonBraceFormatCheck`

**Flag to enable** `python-brace-format`

**Flag to ignore** `ignore-python-brace-format`

**Simple format string** Il y a {} pommes

**Named format string example** Votre solde est {amount} {currency}

**Voir aussi :**

*Formatted strings*, *Python brace format*, *Python Format Strings*

## Format Python

**Summary** La chaîne de format Python ne correspond pas à celle de la source

**Portée** translated strings

**Check class** `weblate.checks.format.PythonFormatCheck`

**Flag to enable** `python-format`

**Flag to ignore** `ignore-python-format`

**Simple format string** Il y a %d pommes

**Named format string example** Your balance is %(amount)d %(currency)s

**Voir aussi :**

*Formatted strings*, *Python string formatting*, *Python Format Strings*

## Format Qt

**Summary** La chaîne de format Qt ne correspond pas à la source

**Portée** translated strings

**Check class** `weblate.checks.qt.QtFormatCheck`

**Flag to enable** `qt-format`

**Flag to ignore** `ignore-qt-format`

**Position format string example** Il y a %1 pommes

**Voir aussi :**

*Formatted strings*, *Qt QString ::arg()*

## Forme plurielle Qt

**Summary** La chaîne au format Qt pluriel ne correspond pas à la source

**Portée** translated strings

**Check class** `weblate.checks.qt.QtPluralCheck`

**Flag to enable** `qt-plural-format`

**Flag to ignore** `ignore-qt-plural-format`

**Plural format string example** Il y a %Ln pomme(s)

**Voir aussi :**

*Formatted strings*, *Qt i18n guide*



## Format Ruby

**Summary** La chaîne de format Ruby ne correspond pas à la source

**Portée** translated strings

**Check class** `weblate.checks.ruby.RubyFormatCheck`

**Flag to enable** `ruby-format`

**Flag to ignore** `ignore-ruby-format`

**Simple format string example** Il y a %d pommes

**Position format string example** Votre solde est %1\$f %2\$s

**Named format string example** Votre solde est %+.2<amount>f %<currency>s

**Named template string** Votre solde est %{amount} %{currency}

**Voir aussi :**

*Formatted strings*, *Ruby Kernel#sprintf*

## Format Scheme

**Summary** La chaîne de format scheme ne correspond pas à la source

**Portée** translated strings

**Check class** `weblate.checks.format.SchemeFormatCheck`

**Flag to enable** `scheme-format`

**Flag to ignore** `ignore-scheme-format`

**Simple format string example** There are ~d apples

**Voir aussi :**

*Formatted strings*, *Srfi 28*, *Chicken Scheme format*, *Guile Scheme formatted output*

## Formatage Vue I18n

**Summary** Le formatage Vue I18n ne correspond pas à celui de la source

**Portée** translated strings

**Check class** `weblate.checks.format.VueFormattingCheck`

**Flag to enable** `vue-format`

**Flag to ignore** `ignore-vue-format`

**Formatage nommé** Il y a {count} pommes

**Formatage Rails I18n** Il y a %{count} pommes

**Messages de paramètres régionaux liés** @:message.dio @:message.the\_world!

**Voir aussi :**

*Formatted strings*, *Vue I18n Formatting*, *Vue I18n Linked locale messages*

## A déjà été traduit

**Summary** Cette chaîne a été traduite par le passé

**Portée** all strings

**Check class** `weblate.checks.consistency.TranslatedCheck`

**Flag to ignore** `ignore-translated`

Means a string has been translated already. This can happen when the translations have been reverted in VCS or lost otherwise.

## Incohérence

**Summary** Cette chaîne a différentes traductions dans ce projet ou n'est pas traduite dans certains composants.

**Portée** all strings

**Check class** `weblate.checks.consistency.ConsistencyCheck`

**Flag to ignore** `ignore-inconsistent`

Weblate checks translations of the same string across all translation within a project to help you keep consistent translations.

The check fails on differing translations of one string within a project. This can also lead to inconsistencies in displayed checks. You can find other translations of this string on the *Other occurrences* tab.

This check applies to all components in a project that have *Permettre la propagation de la traduction* turned on.

---

**Indication :** For performance reasons, the check might not find all inconsistencies, it limits number of matches.

---

---

**Note :** This check also fires in case the string is translated in one component and not in another. It can be used as a quick way to manually handle strings which are untranslated in some components just by clicking on the *Use this translation* button displayed on each line in the *Other occurrences* tab.

You can use *Traduction automatique* add-on to automate translating of newly added strings which are already translated in another component.

---

### Voir aussi :

[\*Keeping translations same across components\*](#)

## Présence d'un caractère kashida

Nouveau dans la version 3.5.

**Summary** Les lettres décoratives kashida ne doivent pas être utilisées

**Portée** translated strings

**Check class** `weblate.checks.chars.KashidaCheck`

**Flag to ignore** `ignore-kashida`

The decorative Kashida letters should not be used in translation. These are also known as Tatweel.

### Voir aussi :

[Kashida sur Wikipédia](#)

## Liens Markdown

Nouveau dans la version 3.5.

**Summary** Les liens Markdown ne correspondent pas à la source

**Portée** translated strings

**Check class** `weblate.checks.markup.MarkdownLinkCheck`

**Flag to enable** `md-text`

**Flag to ignore** `ignore-md-link`

Markdown links do not match source.

**Voir aussi :**

[Markdown links](#)

## Références Markdown

Nouveau dans la version 3.5.

**Summary** Les références de liens Markdown ne correspondent pas à la source

**Portée** translated strings

**Check class** `weblate.checks.markup.MarkdownRefLinkCheck`

**Flag to enable** `md-text`

**Flag to ignore** `ignore-md-reflink`

Markdown link references do not match source.

**Voir aussi :**

[Markdown links](#)

## Syntaxe Markdown

Nouveau dans la version 3.5.

**Summary** La syntaxe Markdown ne correspond pas à la source

**Portée** translated strings

**Check class** `weblate.checks.markup.MarkdownSyntaxCheck`

**Flag to enable** `md-text`

**Flag to ignore** `ignore-md-syntax`

La syntaxe Markdown ne correspond pas à la source

**Voir aussi :**

[Markdown span elements](#)

## Taille maximum de la traduction

**Summary** La traduction ne doit pas dépasser la taille indiquée

**Portée** translated strings

**Check class** `weblate.checks.chars.MaxLengthCheck`

**Flag to enable** `max-length`

**Flag to ignore** `ignore-max-length`

Checks that translations are of acceptable length to fit available space. This only checks for the length of translation characters.

Unlike the other checks, the flag should be set as a `key:value` pair like `max-length:100`.

---

**Indication :** This check looks at number of chars, what might not be the best metric when using proportional fonts to render the text. The *Taille maximale de la traduction* check does check actual rendering of the text.

The `replacements:` flag might be also useful to expand placeables before checking the string.

When `xml-text` flag is also used, the length calculation ignores XML tags.

---

### Taille maximale de la traduction

**Summary** Le texte traduit ne doit pas dépasser une taille donnée

**Portée** translated strings

**Check class** `weblate.checks.render.MaxSizeCheck`

**Flag to enable** `max-size`

**Flag to ignore** `ignore-max-size`

Nouveau dans la version 3.7.

Translation rendered text should not exceed given size. It renders the text with line wrapping and checks if it fits into given boundaries.

This check needs one or two parameters - maximal width and maximal number of lines. In case the number of lines is not provided, one line text is considered.

You can also configure used font by `font-*` directives (see *Customizing behavior using flags*), for example following translation flags say that the text rendered with ubuntu font size 22 should fit into two lines and 500 pixels :

```
max-size:500:2, font-family:ubuntu, font-size:22
```

---

**Indication :** You might want to set `font-*` directives in *Configuration des composants* to have the same font configured for all strings within a component. You can override those values per string in case you need to customize it per string.

The `replacements:` flag might be also useful to expand placeables before checking the string.

When `xml-text` flag is also used, the length calculation ignores XML tags.

---

#### Voir aussi :

*Gestion des polices, Customizing behavior using flags, Taille maximum de la traduction*

### Pas de correspondance \n

**Summary** Number of `\n` in translation does not match source

**Portée** translated strings

**Check class** `weblate.checks.chars.EscapedNewlineCountingCheck`

**Flag to ignore** `ignore-escaped-newline`

Usually escaped newlines are important for formatting program output. Check fails if the number of `\n` literals in translation do not match the source.

## Incohérence de caractère deux-points

**Summary** La chaîne source et la traduction ne finissent pas toutes les deux par deux-points

**Portée** translated strings

**Check class** `weblate.checks.chars.EndColonCheck`

**Flag to ignore** `ignore-end-colon`

Checks that colons are replicated between both source and translation. The presence of colons is also checked for various languages where they do not belong (Chinese or Japanese).

**Voir aussi :**

[Colon on Wikipedia](#)

## Incohérence de points de suspension

**Summary** La chaîne source et la traduction ne se finissent pas toutes les deux par des points de suspension

**Portée** translated strings

**Check class** `weblate.checks.chars.EndEllipsisCheck`

**Flag to ignore** `ignore-end-ellipsis`

Checks that trailing ellipses are replicated between both source and translation. This only checks for real ellipsis (...) not for three dots (. . .).

An ellipsis is usually rendered nicer than three dots in print, and sounds better with text-to-speech.

**Voir aussi :**

[Ellipsis on Wikipedia](#)

## Incohérence de point d'exclamation

**Summary** La source et la traduction ne finissent pas toutes les deux par un point d'exclamation

**Portée** translated strings

**Check class** `weblate.checks.chars.EndExclamationCheck`

**Flag to ignore** `ignore-end-exclamation`

Checks that exclamations are replicated between both source and translation. The presence of exclamation marks is also checked for various languages where they do not belong (Chinese, Japanese, Korean, Armenian, Limbu, Myanmar or Nko).

**Voir aussi :**

[Point d'exclamation sur Wikipédia](#)

## Incohérence de point final

**Summary** La chaîne source et la traduction ne finissent pas toutes les deux par un point final

**Portée** translated strings

**Check class** `weblate.checks.chars.EndStopCheck`

**Flag to ignore** `ignore-end-stop`

Checks that full stops are replicated between both source and translation. The presence of full stops is checked for various languages where they do not belong (Chinese, Japanese, Devanagari or Urdu).

**Voir aussi :**

[Point final sur Wikipédia](#)

## Incohérence de point d'interrogation

**Summary** La source et la traduction ne finissent pas toutes les deux par un point d'interrogation

**Portée** translated strings

**Check class** `weblate.checks.chars.EndQuestionCheck`

**Flag to ignore** `ignore-end-question`

Checks that question marks are replicated between both source and translation. The presence of question marks is also checked for various languages where they do not belong (Armenian, Arabic, Chinese, Korean, Japanese, Ethiopic, Vai or Coptic).

**Voir aussi :**

[Point d'interrogation sur Wikipédia](#)

## Incohérence de point-virgule

**Summary** La chaîne source et la traduction ne finissent pas toutes les deux par un point-virgule

**Portée** translated strings

**Check class** `weblate.checks.chars.EndSemicolonCheck`

**Flag to ignore** `ignore-end-semicolon`

Checks that semicolons at the end of sentences are replicated between both source and translation.

**Voir aussi :**

[Point-virgule sur Wikipedia](#)

## Incohérence dans les sauts de ligne

**Summary** Le nombre de lignes de la traduction n'est pas identique à la source

**Portée** translated strings

**Check class** `weblate.checks.chars.NewLineCountCheck`

**Flag to ignore** `ignore-newline-count`

Usually newlines are important for formatting program output. Check fails if the number of `\n` literals in translation do not match the source.

## Pluriels manquants

**Summary** Certaines formes plurielles n'ont pas été traduites

**Portée** translated strings

**Check class** `weblate.checks.consistency.PluralsCheck`

**Flag to ignore** `ignore-plurals`

Checks that all plural forms of a source string have been translated. Specifics on how each plural form is used can be found in the string definition.

Failing to fill in plural forms will in some cases lead to displaying nothing when the plural form is in use.

## Balises de remplacement

Nouveau dans la version 3.9.

**Summary** Balises de remplacement absentes de la traduction

**Portée** translated strings

**Check class** `weblate.checks.placeholders.PlaceholderCheck`

**Flag to enable** `placeholders`

**Flag to ignore** `ignore-placeholders`

Modifié dans la version 4.3 : Vous pouvez utiliser des expressions rationnelles comme substitut.

Translation is missing some placeholders. These are either extracted from the translation file or defined manually using `placeholders` flag, more can be separated with colon, strings with space can be quoted :

```
placeholders:$URL$:$TARGET$:"some long text"
```

In case you have some syntax for placeholders, you can use a regular expression :

```
placeholders:r"%[^\% ]%"
```

**Voir aussi :**

*[Customizing behavior using flags](#)*

## Espacement de ponctuation

Nouveau dans la version 3.9.

**Summary** Espace insécable manquante devant le signe de ponctuation double

**Portée** translated strings

**Check class** `weblate.checks.chars.PunctuationSpacingCheck`

**Flag to ignore** `ignore-punctuation-spacing`

Checks that there is non breakable space before double punctuation sign (exclamation mark, question mark, semicolon and colon). This rule is used only in a few selected languages like French or Breton, where space before double punctuation sign is a typographic rule.

**Voir aussi :**

[Espace français et anglais sur Wikipédia](#)

## Expression rationnelle

Nouveau dans la version 3.9.

**Summary** La traduction ne respecte pas l'expression rationnelle

**Portée** translated strings

**Check class** `weblate.checks.placeholders.RegexCheck`

**Flag to enable** `regex`

**Flag to ignore** `ignore-regex`

Translation does not match regular expression. The expression is either extracted from the translation file or defined manually using `regex` flag :

```
regex:^(foo|bar$
```

## Pluriel identique

**Summary** Les traductions au singulier et au pluriel sont identiques

**Portée** translated strings

**Check class** `weblate.checks.consistency.SamePluralsCheck`

**Flag to ignore** `ignore-same-plurals`

Check that fails if some plural forms are duplicated in the translation. In most languages they have to be different.

## Nouvelle ligne au début

**Summary** La chaîne source et la traduction ne commencent pas toutes les deux par un saut de ligne

**Portée** translated strings

**Check class** `weblate.checks.chars.BeginNewlineCheck`

**Flag to ignore** `ignore-begin-newline`

Newlines usually appear in source strings for good reason, omissions or additions can lead to formatting problems when the translated text is put to use.

**Voir aussi :**

*Saut de ligne à la fin*

## Espaces au début

**Summary** La chaîne source et la traduction ne commencent pas toutes les deux par le même nombre d'espaces

**Portée** translated strings

**Check class** `weblate.checks.chars.BeginSpaceCheck`

**Flag to ignore** `ignore-begin-space`

A space in the beginning of a string is usually used for indentation in the interface and thus important to keep.

## Saut de ligne à la fin

**Summary** La chaîne source et la traduction ne finissent pas toutes les deux par un saut de ligne

**Portée** translated strings

**Check class** `weblate.checks.chars.EndNewlineCheck`

**Flag to ignore** `ignore-end-newline`

Newlines usually appear in source strings for good reason, omissions or additions can lead to formatting problems when the translated text is put to use.

**Voir aussi :**

*Nouvelle ligne au début*



## Espace à la fin

**Summary** La chaîne source et la traduction ne finissent pas toutes les deux par un espace

**Portée** translated strings

**Check class** `weblate.checks.chars.EndSpaceCheck`

**Flag to ignore** `ignore-end-space`

Checks that trailing spaces are replicated between both source and translation.

Trailing space is usually utilized to space out neighbouring elements, so removing it might break layout.

## Traduction inchangée

**Summary** La chaîne source et la chaîne traduite sont identiques

**Portée** translated strings

**Check class** `weblate.checks.same.SameCheck`

**Flag to ignore** `ignore-same`

Happens if the source and corresponding translation strings is identical, down to at least one of the plural forms. Some strings commonly found across all languages are ignored, and various markup is stripped. This reduces the number of false positives.

This check can help find strings mistakenly untranslated.

The default behavior of this check is to exclude words from the built-in blacklist from the checking. These are words which are frequently not being translated. This is useful to avoid false positives on short strings, which consist only of single word which is same in several languages. This blacklist can be disabled by adding `strict-same` flag to string or component.

**Voir aussi :**

*Configuration des composants, Customizing behavior using flags*

## HTML non sûr

Nouveau dans la version 3.9.

**Summary** La traduction utilise du code HTML non sûr

**Portée** translated strings

**Check class** `weblate.checks.markup.SafeHTMLCheck`

**Flag to enable** `safe-html`

**Flag to ignore** `ignore-safe-html`

The translation uses unsafe HTML markup. This check has to be enabled using `safe-html` flag (see *Customizing behavior using flags*). There is also accompanied autofixer which can automatically sanitize the markup.

---

**Indication :** When `md-text` flag is also used, the Markdown style links are also allowed.

---

**Voir aussi :**

The HTML check is performed by the [Bleach](#) library developed by Mozilla.

### URL

Nouveau dans la version 3.5.

**Summary** La traduction ne contient pas d'URL

**Portée** translated strings

**Check class** `weblate.checks.markup.URLCheck`

**Flag to enable** `url`

**Flag to ignore** `ignore-url`

The translation does not contain an URL. This is triggered only in case the unit is marked as containing URL. In that case the translation has to be a valid URL.

### Balisage XML

**Summary** Les balises XML dans la traduction ne correspondent pas à la source

**Portée** translated strings

**Check class** `weblate.checks.markup.XMLTagsCheck`

**Flag to ignore** `ignore-xml-tags`

This usually means the resulting output will look different. In most cases this is not a desired result from changing the translation, but occasionally it is.

Checks that XML tags are replicated between both source and translation.

---

**Note :** This check is disabled by the `safe-html` flag as the HTML cleanup done by it can produce HTML markup which is not valid XML.

---

### Syntaxe XML

Nouveau dans la version 2.8.

**Summary** Cette traduction n'est pas un XML valide

**Portée** translated strings

**Check class** `weblate.checks.markup.XMLValidityCheck`

**Flag to ignore** `ignore-xml-invalid`

The XML markup is not valid.

---

**Note :** This check is disabled by the `safe-html` flag as the HTML cleanup done by it can produce HTML markup which is not valid XML.

---

### Espace sans chasse

**Summary** La traduction contient un caractère espace sans chasse

**Portée** translated strings

**Check class** `weblate.checks.chars.ZeroWidthSpaceCheck`

**Flag to ignore** `ignore-zero-width-space`

Zero-width space (<U+200B>) characters are used to break messages within words (word wrapping).

As they are usually inserted by mistake, this check is triggered once they are present in translation. Some programs might have problems when this character is used.

**Voir aussi :**

[Zero width space on Wikipedia](#)

## 1.6.4 Source checks

Source checks can help developers improve the quality of source strings.

### Points de suspension

**Summary** Cette chaîne contient trois points (...) au lieu du caractère points de suspension (...)

**Portée** chaînes sources

**Check class** `weblate.checks.source.EllipsisCheck`

**Flag to ignore** `ignore-ellipsis`

This fails when the string uses three dots ( . . . ) when it should use an ellipsis character (...).

Using the Unicode character is in most cases the better approach and looks better rendered, and may sound better with text-to-speech.

**Voir aussi :**

[Ellipsis on Wikipedia](#)

### Syntaxe ICU MessageFormat

Nouveau dans la version 4.9.

**Summary** Erreurs de syntaxe dans les chaînes ICU MessageFormat.

**Portée** chaînes sources

**Check class** `weblate.checks.icu.ICUSourceCheck`

**Flag to enable** `icu-message-format`

**Flag to ignore** `ignore-icu-message-format`

**Voir aussi :**

[ICU MessageFormat](#)

### Ancienne chaîne non traduite

Nouveau dans la version 4.1.

**Summary** Cette chaîne n'a pas été traduite depuis longtemps

**Portée** chaînes sources

**Check class** `weblate.checks.source.LongUntranslatedCheck`

**Flag to ignore** `ignore-long-untranslated`

When the string has not been translated for a long time, it can indicate a problem in a source string making it hard to translate.

### Plusieurs vérifications en échec

**Summary** Les traductions dans plusieurs langues ont des vérifications échouées

**Portée** chaînes sources

**Check class** `weblate.checks.source.MultipleFailingCheck`

**Flag to ignore** `ignore-multiple-failures`

Numerous translations of this string have failing quality checks. This is usually an indication that something could be done to improve the source string.

This check failing can quite often be caused by a missing full stop at the end of a sentence, or similar minor issues which translators tend to fix in translation, while it would be better to fix it in the source string.

## Multiples variables non nommées

Nouveau dans la version 4.1.

**Summary** Il y a plusieurs variables non nommées dans la chaîne, ce qui rend impossible leur réorganisation par les traducteurs

**Portée** chaînes sources

**Check class** `weblate.checks.format.MultipleUnnamedFormatsCheck`

**Flag to ignore** `ignore-unnamed-format`

There are multiple unnamed variables in the string, making it impossible for translators to reorder them.

Consider using named variables instead to allow translators to reorder them.

## Non pluralisé

**Summary** Cette chaîne est utilisée comme un pluriel, sans utiliser les formes plurielles

**Portée** chaînes sources

**Check class** `weblate.checks.source.OptionalPluralCheck`

**Flag to ignore** `ignore-optional-plural`

The string is used as a plural, but does not use plural forms. In case your translation system supports this, you should use the plural aware variant of it.

For example with Gettext in Python it could be :

```
from gettext import gettext
print(gettext("Selected %d file", "Selected %d files", files) % files)
```

## 1.7 Recherche

Nouveau dans la version 3.9.

Des requêtes avancées utilisant des opérations booléennes, des parenthèses ou une recherche par champ spécifique peuvent être utilisées pour trouver les chaînes de caractères que vous souhaitez.

Lorsqu'aucun champ n'est défini, la recherche se fait sur les champs *Source*, *Traduction* et *Contexte*.

Search

All strings ▾  Sort By ▾

Advanced query builder

Source strings ▾ Search for... ☐ Exact Add Strings with suggestions ▾ Add

String changed after ▾ mm/dd/yyyy ☐ Add

Query examples

Review strings changed by other users	<code>changed:&gt;=2022-01-25 AND NOT changed_by:testuser</code>	Add
Translated strings	<code>state:&gt;=translated</code>	Add
Strings with comments	<code>has:comment</code>	Add
Strings with any failing checks	<code>has:check</code>	Add
Strings with suggestions from others	<code>has:suggestion AND NOT suggestion_author:testuser</code>	Add
Approved strings with suggestions	<code>state:approved AND has:suggestion</code>	Add
All untranslated strings added the past month	<code>added:&gt;=2022-01-25 AND state:&lt;=needs-editing</code>	Add
Translated strings in a certain language	<code>is:translated AND language:cs</code>	Add

Search

Powered by Weblate 4.11 [About Weblate](#) [Legal](#) [Contact](#) [Documentation](#) [Donate to Weblate](#)

## 1.7.1 Recherche simple

Toute phrase entrée dans la boîte de recherche est divisée en mots. Les chaînes de caractères contenant l'un d'eux sont affichées. Pour rechercher une phrase exacte, mettez la « phrase recherchée » entre guillemets (les guillemets simples (") et doubles (») fonctionneront) : "ceci est une chaîne entre guillemets" ou 'une autre chaîne entre guillemets'.

## 1.7.2 Champs

**source:TEXTE** Source string case-insensitive search.

**target:TEXTE** Target string case-insensitive search.

**context:TEXTE** Context string case-insensitive search.

**key:TEXTE** Key string case-insensitive search.

**note:TEXTE** Source string description case-insensitive search.

**location:TEXTE** Location string case-insensitive search.

**priority:NUMÉRO** Priorité de chaîne de caractères.

**added:DATEHEURE** Horodatage de la date à laquelle la chaîne a été ajoutée dans Weblate.

**state:TEXTE** Recherche par état (approved (approuvé), translated (traduit), needs-editing (à vérifier), empty (vide), ``read-only`` (lecture seule)), prend en charge *Opérateurs de champs*.

**pending:BOOLÉEN** Chaîne en attente d'archivage dans le système de contrôle des versions.

**has:TEXTE** Search for string having attributes - plural, context, suggestion, comment, check, dismissed-check, translation, variant, screenshot, flags, explanation, glossary, note, label.

**is:TEXTE** Recherche d'états de chaînes (pending (en attente), translated (traduite), untranslated (non traduite)).

**language:TEXTE** Langue cible de la chaîne.

**component:TEXTE** Component slug or name case-insensitive search, see *Identifiant du composant* and *Nom du composant*.

**project:TEXTE** Identifiant du projet, voir *Abrégé de l'URL*.

**changed\_by:TEXTE** La chaîne a été modifiée par l'auteur avec le nom d'utilisateur fourni.

**changed:DATEHEURE** Le contenu de la chaîne a été modifiée à la date fournie, prend en charge *Opérateurs de champs*.

**change\_time:DATETIME** String was changed on date, supports *Opérateurs de champs*, unlike changed this includes event which don't change content and you can apply custom action filtering using `change_action`.

**change\_action:TEXT** Filters on change action, useful together with `change_time`. Accepts English name of the change action, either quoted and with spaces or lowercase and spaces replaced by a hyphen. See *Recherche de modifications* for examples.

**check:TEXTE** La chaîne échoue à une vérification.

**dismissed\_check:TEXTE** La chaîne a une vérification ignorée.

**comment:TEXTE** Recherche dans les commentaires des utilisateurs.

**resolved\_comment:TEXT** Search in resolved comments.

**comment\_author:TEXTE** Filtrer par auteur de commentaire.

**suggestion:TEXTE** Recherche dans les suggestions.

**suggestion\_author:TEXTE** Filtrer par auteur de suggestion.

**explanation:TEXT** Rechercher dans les explications.

**label:TEXT** Search in labels.

**screenshot:TEXT** Search in screenshots.

### 1.7.3 Opérateurs booléens

Vous pouvez combiner des recherches en utilisant AND, OR, NOT et des parenthèses pour former des requêtes complexes. Par exemple : `state:translated AND (source:hello OR source:bar)`

### 1.7.4 Opérateurs de champs

Vous pouvez spécifier des opérateurs, des plages ou des recherches partielles pour les recherches de date ou numériques :

**state:>=translated** L'état est `translated` (traduit) ou mieux (`approved` (approuvé)).

**changed:2019** Modifié durant l'année 2019.

**changed:[2019-03-01 to 2019-04-01]** Modifié entre les deux dates fournies.

### 1.7.5 Opérateurs exacts

Vous pouvez effectuer une recherche de correspondance exacte sur différents champs de chaîne de caractères en utilisant l'opérateur `=`. Par exemple, pour rechercher toutes les chaînes de caractères source correspondant exactement à `hello world`, utilisez `source:="hello world"`. Pour la recherche d'expressions d'un seul mot, vous pouvez sauter les guillemets. Par exemple, pour rechercher toutes les chaînes de caractères source correspondant à `hello`, vous pouvez utiliser `source:=hello`.

### 1.7.6 Recherche de modifications

Nouveau dans la version 4.4.

Searching for history events can be done using `change_action` and `change_time` operators.

For example, searching for strings marked for edit in 2018 can be entered as `change_time:2018 AND change_action:marked-for-edit` or `change_time:2018 AND change_action:"Marked for edit"`.

### 1.7.7 Expressions rationnelles

Partout où le texte est accepté, vous pouvez également spécifier une expression rationnelle sous la forme `r"regexp"`.

Par exemple, pour rechercher toutes les chaînes de caractères source qui contiennent un chiffre compris entre 2 et 5, utilisez `source:r"[2-5]"`.

### 1.7.8 Requêtes prédéfinies

Vous pouvez choisir parmi un certain nombre de requêtes prédéfinies sur la page de recherche, ce qui vous permet d'accéder rapidement aux recherches les plus fréquentes :

**Weblate** Dashboard Projects Languages Checks

WeblateOrg / Django / Czech / Translate translated 96%

< > 1/1 >

Custom search '%(count)s word'

Zen

Position and priority

### Translation

English

**Singular**

%(count)s word

**Plural**

%(count)s words

**Czech, One**

%(count)s slovo

**Czech, Few**

%(count)s slova

**Czech, Other**

%(count)s slov

Plural formula: (n==1) ? 0 : (n>=2 && n<=4) ? 1 : 2

☐ Needs editing

Save and continue Save and stay Suggest Skip

Nearby strings 20 Comments Automatic suggestions Other languages 3

### History

New comment

Comment on this string for fellow translators and developers to read.

**Scope**

Translation comment, discussions with other translators

Is your comment specific to this translation or generic for all of them?

**New comment**

You can use Markdown and mention users by @username.

Save

- Untranslated strings • state:empty
- Unfinished strings • state:<translated
- Translated strings • state:>=translated
- Strings marked for edit • state:needs-editing
- Strings with suggestions • has:suggestion
- Strings with variants • has:variant
- Strings with labels • has:label
- Strings with context • has:context
- Unfinished strings without suggestions • state:<translated AND NOT has:suggestion
- Strings with comments • has:comment
- Strings with any failing checks • has:check
- Approved strings • state:approved
- Strings waiting for review • state:translated

**Explanation**

No explanation currently provided.

**Labels**

No labels currently set.

**Flags**

python-format

**Source string location**

weblate/templates/translation.html:149

**String age**

5 seconds ago

**Source string age**

6 seconds ago

**Translation file**

weblate/locale/cs/LC\_MESSAGES/django.po, string 5



## 1.7.9 Ordre des résultats

Il existe de nombreuses options pour ordonner les chaînes en fonction de vos besoins :

The screenshot shows the Weblate web interface. At the top, there's a navigation bar with 'Weblate', 'Dashboard', 'Projects', 'Languages', and 'Checks'. Below this, the breadcrumb 'WeblateOrg / Django / Czech / Translate' is visible, along with a 'translated 96%' indicator. The main area displays a list of strings, with the first one being '(...) instead of an ellipsis character (...)'. A dropdown menu is open, showing sorting options: 'Position and priority', 'Position', 'Priority', 'Labels', 'Source string', 'Target string', 'Age of string', 'Number of words', 'Number of comments', 'Number of failing checks', and 'Key'. The 'Position and priority' option is selected. Below the string list, there are buttons for 'Save and stay', 'Suggest', and 'Skip'. On the right side, there's a 'Glossary' section with 'English' and 'Czech' tabs, and a 'String information' section with details like 'Screenshot context', 'Explanation', 'Labels', 'Flags', 'Source string location', 'String age', 'Source string age', and 'Translation file'.

## 1.8 Flux de travail de traduction

L'utilisation de Weblate est un processus qui rapproche vos utilisateurs de vous, en vous rapprochant de vos traducteurs. C'est à vous de décider du nombre de fonctionnalités que vous souhaitez utiliser.

The following is not a complete list of ways to configure Weblate. You can base other workflows on the most usual examples listed here.

### 1.8.1 Accès à la traduction

The *access control* is not discussed in detail as a whole in the workflows, as most of its options can be applied to any workflow. Please consult the respective documentation on how to manage access to translations.

In the following chapters, *any user* means a user who has access to the translation. It can be any authenticated user if the project is public, or a user that has a *Translate* permission for the project.

### 1.8.2 États de traduction

Each translated string can be in one of following states :

**Non traduit** Translation is empty, it might or not be stored in the file, depending on the file format.

**À vérifier** Translation needs editing, this is usually the result of a source string change, fuzzy matching or translator action. The translation is stored in the file, depending on the file format it might be marked as needing edit (for example as it gets a `fuzzy` flag in the Gettext file).

**En attente de révision** Translation is made, but not reviewed. It is stored in the file as a valid translation.

**Approuvé** Translation has been approved in the review. It can no longer be changed by translators, but only by reviewers. Translators can only add suggestions to it.

**Suggestions** Suggestions are stored in Weblate only and not in the translation file.

The states are represented in the translation files when possible.

---

**Indication :** In case file format you use does not support storing states, you might want to use *Marquer les traductions inchangées comme « À vérifier »* add-on to flag unchanged strings as needing editing.

---

**Voir aussi :**

*Fonctionnalités des types de traduction, Flux de travail de traduction*

### 1.8.3 Traduction directe

This is most usual setup for smaller teams, anybody can directly translate. This is also the default setup in Weblate.

- *Any user* can edit translations.
- Suggestions are optional ways to suggest changes, when translators are not sure about the change.

Paramètre	Valeur	Note
Activer les révisions	inactif	Configured at project level.
Autoriser les suggestions	actif	It is useful for users to be able to suggest when they are not sure.
Vote pour la suggestion	inactif	
Accepter automatiquement les suggestions	0	
Translators group	<i>Utilisateurs</i>	Ou <i>Traduire</i> avec <i>per-project access control</i> .
Reviewers group	N/A	Not used.

### 1.8.4 Peer review

With this workflow, anybody can add suggestions, and need approval from additional member(s) before it is accepted as a translation.

- *Any user* can add suggestions.
- *Any user* can vote for suggestions.
- Suggestions become translations when given a predetermined number of votes.

Paramètre	Valeur	Note
Activer les révisions	inactif	Configured at project level.
Autoriser les suggestions	actif	
Vote pour la suggestion	inactif	
Accepter automatiquement les suggestions	1	You can set higher value to require more peer reviews.
Translators group	<i>Utilisateurs</i>	Ou Traduire avec <i>per-project access control</i> .
Reviewers group	N/A	Not used, all translators review.

### 1.8.5 Dedicated reviewers

Nouveau dans la version 2.18 : The proper review workflow is supported since Weblate 2.18.

With dedicated reviewers you have two groups of users, one able to submit translations, and one able to review them to ensure translations are consistent and that the quality is good.

- *Any user* can edit unapproved translations.
- Le *réviseur* peut approuver/désapprouver des chaînes.
- *Reviewer* can edit all translations (including approved ones).
- Suggestions can also be used to suggest changes for approved strings.

Paramètre	Valeur	Note
Activer les révisions	actif	Configured at project level.
Autoriser les suggestions	inactif	It is useful for users to be able to suggest when they are not sure.
Vote pour la suggestion	inactif	
Accepter automatiquement les suggestions	0	
Translators group	<i>Utilisateurs</i>	Ou Traduire avec <i>per-project access control</i> .
Reviewers group	<i>Réviseur</i>	Or Review with <i>per-project access control</i> .

## 1.8.6 Turning on reviews

Reviews can be turned on in the project configuration, from the *Workflow* subpage of project settings (to be found in the *Manage* → *Settings* menu) :

Webplate Dashboard Projects Languages Checks

WebplateOrg / Settings

Basic Access **Workflow** Components

☒ Set "Language-Team" header ⓘ  
Lets Weblate update the "Language-Team" file header of your project.

☒ Use shared translation memory ⓘ  
Uses the pool of shared translations between projects.

☒ Contribute to shared translation memory ⓘ  
Contributes to the pool of shared translations between projects.

☒ Enable hooks ⓘ  
Whether to allow updating this repository by remote hooks.

Language aliases ⓘ

Comma-separated list of language code mappings, for example: en\_GB:en,en\_US:en

☐ Enable reviews ⓘ  
Requires dedicated reviewers to approve translations.

☐ Enable source reviews ⓘ  
Requires dedicated reviewers to approve source strings.

Save

Powered by Weblate 4.11 About Weblate Legal Contact Documentation Donate to Weblate

---


**Note :** Depending on Weblate configuration, the setting might not be available to you. For example on Hosted Weblate this is not available for projects hosted for free.

---

## 1.8.7 Quality gateway for the source strings

In many cases the original source language strings are coming from developers, because they write the code and provide initial strings. However developers are often not a native speakers in the source language and do not provide desired quality of the source strings. The intermediate translation can help you in addressing this - there is additional quality gateway for the strings between developers and translators and users.

By setting *Fichier de langue intermédiaire*, this file will be used as source for the strings, but it will be edited to source language to polish it. Once the string is ready in the source language, it will be also available for translators to translate into additional languages.

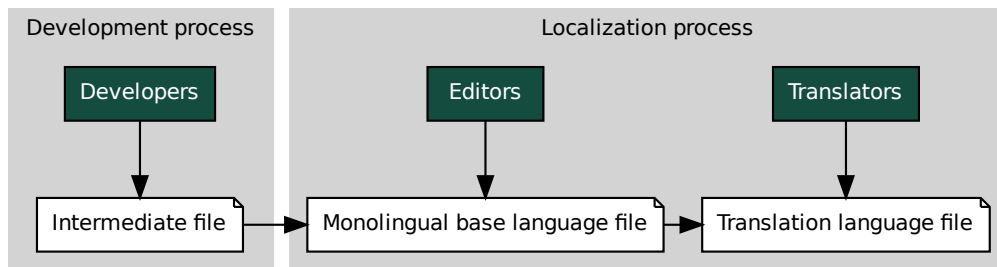**Voir aussi :**

*Fichier de langue intermédiaire, Fichier de langue de base mono-langue, Formats monolingues et bilingues*

## 1.8.8 Source strings reviews

With *Activer la révision des chaînes sources* enabled, the review process can be applied on the source strings. Once enabled, users can report issues in the source strings. The actual process depends on whether you use bilingual or monolingual formats.

For monolingual formats, the source string review behaves similarly as with *Dedicated reviewers* - once issue is reported on the source string, it is marked as *Needs editing*.

The bilingual formats do not allow direct editing of the source strings (these are typically extracted directly from the source code). In this case *Source needs review* label is attached to strings reported by translators. You should review such strings and either edit them in the source or remove the label.

**Voir aussi :**

*Formats monolingues et bilingues, Dedicated reviewers, labels, Commentaires*

## 1.9 Foire aux questions

### 1.9.1 Configuration

#### Comment créer un flux de travail automatisé ?

Weblate can handle all the translation things semi-automatically for you. If you give it push access to your repository, the translations can happen without interaction, unless some merge conflict occurs.

1. Set up your Git repository to tell Weblate when there is any change, see *Déclencheurs de notification* for info on how to do it.
2. Set a push URL at your *Configuration des composants* in Weblate, this allows Weblate to push changes to your repository.
3. Turn on *Pousser lors de l'archivage* on your *Configuration des composants* in Weblate, this will make Weblate push changes to your repository whenever they happen at Weblate.

**Voir aussi :**

*Traduction en continu, Avoiding merge conflicts*

### How to access repositories over SSH ?

Please see *Accessing repositories* for info on setting up SSH keys.

### How to fix merge conflicts in translations ?

Merge conflicts happen from time to time when the translation file is changed in both Weblate and the upstream repository concurrently. You can usually avoid this by merging Weblate translations prior to making changes in the translation files (e.g. before running msgmerge). Just tell Weblate to commit all pending translations (you can do it in *Repository maintenance* in the *Manage* menu) and merge the repository (if automatic push is not on).

If you've already encountered a merge conflict, the easiest way to solve all conflicts locally on your machine, is to add Weblate as a remote repository, merge it into upstream and fix any conflicts. Once you push changes back, Weblate will be able to use the merged version without any other special actions.

---

**Note :** Depending on your setup, access to the Weblate repository might require authentication. When using the built-in *Exportateur Git* in Weblate, you authenticate with your username and the API key.

---

```
# Commit all pending changes in Weblate, you can do this in the UI as well:
wlc commit
# Lock the translation in Weblate, again this can be done in the UI as well:
wlc lock
# Add Weblate as remote:
git remote add weblate https://hosted.weblate.org/git/project/component/
# You might need to include credentials in some cases:
git remote add weblate https://username:APIKEY@hosted.weblate.org/git/project/
↪component/

# Update weblate remote:
git remote update weblate

# Merge Weblate changes:
git merge weblate/main

# Resolve conflicts:
edit ...
git add ...
...
git commit

# Push changes to upstream repository, Weblate will fetch merge from there:
git push

# Open Weblate for translation:
wlc unlock
```

If you're using multiple branches in Weblate, you can do the same to all of them :

```
# Add and update Weblate remotes
git remote add weblate-one https://hosted.weblate.org/git/project/one/
git remote add weblate-second https://hosted.weblate.org/git/project/second/
git remote update weblate-one weblate-second

# Merge QA_4_7 branch:
git checkout QA_4_7
git merge weblate-one/QA_4_7
... # Resolve conflicts
git commit
```

(suite sur la page suivante)

(suite de la page précédente)

```
# Merge main branch:
git checkout main
git merge weblates-second/main
... # Resolve conflicts
git commit

# Push changes to the upstream repository, Weblate will fetch the merge from there:
git push
```

In case of gettext PO files, there is a way to merge conflicts in a semi-automatic way :

Fetch and keep a local clone of the Weblate Git repository. Also get a second fresh local clone of the upstream Git repository (i. e. you need two copies of the upstream Git repository : An intact and a working copy) :

```
# Add remote:
git remote add weblate /path/to/weblate/snapshot/

# Update Weblate remote:
git remote update weblate

# Merge Weblate changes:
git merge weblate/main

# Resolve conflicts in the PO files:
for PO in `find . -name '*.po'` ; do
    msgcat --use-first /path/to/weblate/snapshot/$PO\
                /path/to/upstream/snapshot/$PO -o $PO.merge
    msgmerge --previous --lang=${PO%.po} $PO.merge domain.pot -o $PO
    rm $PO.merge
    git add $PO
done
git commit

# Push changes to the upstream repository, Weblate will fetch merge from there:
git push
```

**Voir aussi :**

*How to export the Git repository that Weblate uses ?, Traduction en continu, Avoiding merge conflicts, Client Weblate*

## How do I translate several branches at once ?

Weblate supports pushing translation changes within one *Configuration du projet*. For every *Configuration des composants* which has it turned on (the default behavior), the change made is automatically propagated to others. This way translations are kept synchronized even if the branches themselves have already diverged quite a lot, and it is not possible to simply merge translation changes between them.

Once you merge changes from Weblate, you might have to merge these branches (depending on your development workflow) discarding differences :

```
git merge -s ours origin/maintenance
```

**Voir aussi :**

*Keeping translations same across components*

### How to translate multi-platform projects ?

Weblate supports a wide range of file formats (see *Formats de fichiers pris en charge*) and the easiest approach is to use the native format for each platform.

Once you have added all platform translation files as components in one project (see *Adding translation projects and components*), you can utilize the translation propagation feature (turned on by default, and can be turned off in the *Configuration des composants*) to translate strings for all platforms at once.

#### Voir aussi :

*Keeping translations same across components*

### How to export the Git repository that Weblate uses ?

There is nothing special about the repository, it lives under the `DATA_DIR` directory and is named `vcs/<project>/<component>/`. If you have SSH access to this machine, you can use the repository directly.

For anonymous access, you might want to run a Git server and let it serve the repository to the outside world.

Alternatively, you can use *Exportateur Git* inside Weblate to automate this.

### What are the options for pushing changes back upstream ?

This heavily depends on your setup, Weblate is quite flexible in this area. Here are examples of some workflows used with Weblate :

- Weblate automatically pushes and merges changes (see *Comment créer un flux de travail automatisé ?*).
- You manually tell Weblate to push (it needs push access to the upstream repository).
- Somebody manually merges changes from the Weblate git repository into the upstream repository.
- Somebody rewrites history produced by Weblate (e.g. by eliminating merge commits), merges changes, and tells Weblate to reset the content in the upstream repository.

Of course you are free to mix all of these as you wish.

### How can I limit Weblate access to only translations, without exposing source code to it ?

You can use `git submodule` for separating translations from source code while still having them under version control.

1. Create a repository with your translation files.
2. Add this as a submodule to your code :

```
git submodule add git@example.com:project-translations.git path/to/  
↳translations
```

3. Link Weblate to this repository, it no longer needs access to the repository containing your source code.
4. You can update the main repository with translations from Weblate by :

```
git submodule update --remote path/to/translations
```

Please consult the `git submodule` documentation for more details.



### How can I check whether my Weblate is set up properly ?

Weblate includes a set of configuration checks which you can see in the admin interface, just follow the *Performance report* link in the admin interface, or open the `/manage/performance/` URL directly.

### Why are all commits committed by Weblate <noreply@weblate.org> ?

This is the default committer name, configured when you create a translation component. You can change it in the administration at any time.

The author of every commit (if the underlying VCS supports it) is still recorded correctly as the user that made the translation.

**Voir aussi :**

*Configuration des composants*

### How to move files in the repository without losing history in Weblate ?

To keep the history, comments, or screenshots linked to strings after changing the files location you need to ensure that these strings are never deleted in Weblate. These removals can happen in case the Weblate repository is updated, but the component configuration still points to the old files. This makes Weblate assume that it should delete all the translations.

The solution to this is to perform the operation in sync with Weblate :

1. Lock the affected component in Weblate.
2. Commit any pending changes and merge them into the upstream repository.
3. Disable receiving webhooks the *Configuration du projet*; this prevents Weblate from immediately seeing changes in the repository.
4. Do any needed changes in the repo (for example using `git mv`), push them to the upstream repository.
5. Change the *Configuration des composants* to match the new setup; upon changing configuration, Weblate will fetch the updated repository and notice the changed locations while keeping existing strings.
6. Unlock the component and re-enable hooks in the project configuration.

## 1.9.2 Utilisation

### How do I review the translations of others ?

- There are several review based workflows available in Weblate, see *Flux de travail de traduction*.
- You can subscribe to any changes made in *Notifications* and then check others contributions as they come in by e-mail.
- There is a review tool available at the bottom of the translation view, where you can choose to browse translations made by others since a given date.

**Voir aussi :**

*Flux de travail de traduction*

## How do I provide feedback on a source string ?

On context tabs below translation, you can use the *Comments* tab to provide feedback on a source string, or discuss it with other translators.

### Voir aussi :

report-source, *Commentaires*

## How can I use existing translations while translating ?

- Toutes les contributions dans Weblate peuvent être utilisées grâce au mémoire de traduction partagé.
- Vous pouvez importer un fichier de mémoire de traduction existant dans Weblate.
- Use the import functionality to load compendium as translations, suggestions or translations needing review. This is the best approach for a one-time translation using a compendium or a similar translation database.
- You can set up *tmserver* with all databases you have and let Weblate use it. This is good when you want to use it several times during translation.
- Another option is to translate all related projects in a single Weblate instance, which will make it automatically pick up translations from other projects as well.

### Voir aussi :

*Traduction automatisée, Suggestions automatiques, Mémoire de traduction*

## Does Weblate update translation files besides translations ?

Weblate tries to limit changes in translation files to a minimum. For some file formats it might unfortunately lead to reformatting the file. If you want to keep the file formatted your way, please use a pre-commit hook for that.

### Voir aussi :

updating-target-files

## Where do language definitions come from and how can I add my own ?

The basic set of language definitions is included within Weblate and Translate-toolkit. This covers more than 150 languages and includes info about plural forms or text direction.

You are free to define your own languages in the administrative interface, you just need to provide info about it.

### Voir aussi :

*Définitions de langue*

## Can Weblate highlight changes in a fuzzy string ?

Weblate supports this, however it needs the data to show the difference.

For Gettext PO files, you have to pass the parameter `--previous` to **msgmerge** when updating PO files, for example :

```
msgmerge --previous -U po/cs.po po/phpmyadmin.pot
```

For monolingual translations, Weblate can find the previous string by ID, so it shows the differences automatically.

### Why does Weblate still show old translation strings when I've updated the template ?

Weblate does not try to manipulate the translation files in any way other than allowing translators to translate. So it also does not update the translatable files when the template or source code have been changed. You simply have to do this manually and push changes to the repository, Weblate will then pick up the changes automatically.

**Note :** It is usually a good idea to merge changes done in Weblate before updating translation files, as otherwise you will usually end up with some conflicts to merge.

For example with gettext PO files, you can update the translation files using the **msgmerge** tool :

```
msgmerge -U locale/cs/LC_MESSAGES/django.mo locale/django.pot
```

In case you want to do the update automatically, you can install add-on *Mettre à jour les fichiers PO afin qu'ils correspondent au POT (msgmerge)*.

**Voir aussi :**

updating-target-files

## 1.9.3 Dépannage

### Requests sometimes fail with « too many open files » error

This happens sometimes when your Git repository grows too much and you have many of them. Compressing the Git repositories will improve this situation.

The easiest way to do this is to run :

```
# Go to DATA_DIR directory
cd data/vcs
# Compress all Git repositories
for d in */* ; do
    pushd $d
    git gc
    popd
done
```

**Voir aussi :**

*DATA\_DIR*

### When accessing the site I get a « Bad Request (400) » error

This is most likely caused by an improperly configured *ALLOWED\_HOSTS*. It needs to contain all hostnames you want to access on your Weblate. For example :

```
ALLOWED_HOSTS = ["weblate.example.com", "weblate", "localhost"]
```

**Voir aussi :**

*Allowed hosts setup*

### What does mean « There are more files for the single language (en) » ?

This typically happens when you have translation file for source language. Weblate keeps track of source strings and reserves source language for this. The additional file for same language is not processed.

- Si la traduction vers la langue source est souhaitée, veuillez modifier le *Langue source* dans les paramètres du composant.
- Si le fichier de traduction de la langue source n'est pas nécessaire, veuillez le supprimer du dépôt.
- Si le fichier de traduction de la langue source est nécessaire, mais qu'il doit être ignoré par Weblate, veuillez ajuster le *Filtre sur la langue* pour l'exclure.

---

**Indication :** You might get similar error message for other languages as well. In that case the most likely reason is that several files map to single language in Weblate.

This can be caused by using obsolete language codes together with new one (`ja` and `jp` for Japanese) or including both country specific and generic codes (`fr` and `fr_FR`). See *Parsing language codes* for more details.

---

## 1.9.4 Fonctionnalités

### Does Weblate support other VCSes than Git and Mercurial ?

Weblate currently does not have native support for anything other than *Git* (with extended support for *GitHub pull requests*, *Gerrit* and *Subversion*) and *Mercurial*, but it is possible to write backends for other VCSes.

You can also use *Git remote helpers* in Git to access other VCSes.

Weblate also supports VCS-less operation, see *Local files*.

---

**Note :** For native support of other VCSes, Weblate requires using distributed VCS, and could probably be adjusted to work with anything other than Git and Mercurial, but somebody has to implement this support.

---

#### Voir aussi :

*Intégration avec le système de contrôle de versions*

### How does Weblate credit translators ?

Every change made in Weblate is committed into VCS under the translators name. This way every single change has proper authorship, and you can track it down using the standard VCS tools you use for code.

Additionally, when the translation file format supports it, the file headers are updated to include the translator's name.

#### Voir aussi :

*list\_translators*, *../devel/reporting*

### Why does Weblate force showing all PO files in a single tree ?

Weblate was designed in a way that every PO file is represented as a single component. This is beneficial for translators, so they know what they are actually translating.

Modifié dans la version 4.2 : Les traducteurs peuvent traduire l'ensemble des composants d'un projet dans une langue spécifique.

## Why does Weblate use language codes such `sr_Latn` or `zh_Hant` ?

These are language codes defined by [RFC 5646](#) to better indicate that they are really different languages instead previously wrongly used modifiers (for `@latin` variants) or country codes (for Chinese).

Weblate still understands legacy language codes and will map them to current one - for example `sr@latin` will be handled as `sr_Latn` or `zh@CN` as `zh_Hans`.

---

**Note :** Weblate defaults to POSIX style language codes with underscore, see *Définitions de langue* for more details.

---

**Voir aussi :**

*Définitions de langue, Style de code-langue, Adding new translations*

## 1.10 Formats de fichiers pris en charge

Weblate prend en charge la plupart des formats de traduction compris par [translate-toolkit](#), cependant chaque format étant légèrement différent, certains problèmes peuvent survenir avec des formats peu testés.

**Voir aussi :**

[Translation Related File Formats](#)

---

**Note :** Lorsque vous choisissez un format de fichier pour votre demande, il est préférable de conserver un format bien établi dans la boîte à outils/plateforme que vous utilisez. De cette façon, vos traducteurs pourront utiliser les outils auxquels ils sont habitués et contribueront plus probablement à votre projet.

---

### 1.10.1 Formats monolingues et bilingues

Les formats monolingues et bilingues sont pris en charge. Les formats bilingues stockent deux langues dans un seul fichier — source et traduction (exemples typiques : *GNU gettext*, *XLIFF* ou *Apple iOS strings*). D'autre part, les formats monolingues identifient la chaîne par un identifiant, et chaque fichier de langue ne contient que la correspondance de ces derniers avec une langue donnée (exemple typique : *Android string resources*). Certains formats de fichiers sont utilisés dans les deux variantes, veuillez consulter la description détaillée figurant ci-dessous.

Pour une utilisation correcte des fichiers monolingues, Weblate nécessite l'accès à un fichier contenant la liste complète des chaînes de caractères à traduire avec leur source — ce fichier est appelé *Fichier de langue de base mono-langue* dans Weblate, bien que le nom puisse varier selon votre paradigme.

De plus, ce flux de travail peut être étendu en utilisant un *Fichier de langue intermédiaire* pour inclure des chaînes fournies par les développeurs, mais qui ne doivent pas être utilisées telles quelles dans les chaînes finales.

### 1.10.2 Détection automatique

Weblate peut détecter automatiquement plusieurs formats de fichiers répandus, mais cette détection peut nuire aux performances et limitera les fonctionnalités spécifiques à un format de fichier donné (par exemple l'ajout automatique de nouvelles traductions).

### 1.10.3 Fonctionnalités des types de traduction

Fonctionnalités de chacun des formats pris en charge :

Format	Type <sup>page 67, 1</sup>	Plu-riels <sup>page 67, 2</sup>	Descrip-tions <sup>page 67, 3</sup>	Contexte <sup>page 67, 4</sup>	Emplace-ment <sup>page 67, 5</sup>	Dra-peaux <sup>page 67, 8</sup>	États sup-plémentaires <sup>page 67, 6</sup>
<i>GNU gettext</i>	bilingue	oui	oui	oui	oui	oui <sup>9</sup>	à vérifier
<i>Gettext monolingue</i>	mono-lingue	oui	oui	oui	oui	oui <sup>?</sup>	à vérifier
<i>XLIFF</i>	les deux	oui	oui	oui	oui	oui <sup>10</sup>	à vérifier, approuver
<i>Java properties</i>	les deux	non	oui	non	non	non	
<i>mi18n lang files</i>	mono-lingue	non	oui	non	non	non	
<i>Propriétés GWT</i>	mono-lingue	oui	oui	non	non	non	
<i>Joomla translations</i>	mono-lingue	non	oui	non	oui	non	
<i>Qt Linguist .ts</i>	les deux	oui	oui	non	oui	oui <sup>?</sup>	à vérifier
<i>Android string resources</i>	mono-lingue	oui	oui <sup>7</sup>	non	non	oui <sup>?</sup>	
<i>Apple iOS strings</i>	bilingue	non	oui	non	non	non	
<i>Chaînes de caractères PHP</i>	mono-lingue	non <sup>11</sup>	oui	non	non	non	
<i>JSON files</i>	mono-lingue	non	non	non	non	non	
<i>JSON i18next files</i>	mono-lingue	oui	non	non	non	non	
<i>go-i18n JSON files</i>	mono-lingue	oui	non	non	non	non	
<i>ARB File</i>	mono-lingue	oui	oui	non	non	non	
<i>WebExtension JSON</i>	mono-lingue	oui	oui	non	non	non	
<i>.XML resource files</i>	mono-lingue	non	oui	non	non	oui <sup>?</sup>	
<i>CSV files</i>	les deux	non	oui	oui	oui	non	à vérifier
<i>YAML files</i>	mono-lingue	non	oui	non	non	non	
<i>Ruby YAML files</i>	mono-lingue	oui	oui	non	non	non	
<i>DTD files</i>	mono-lingue	non	non	non	non	non	
<i>Flat XML files</i>	mono-lingue	non	non	non	non	oui <sup>?</sup>	

suite sur la page suivante

Tableau 1 – suite de la page précédente

Format	Type <sup>page 67, 1</sup>	Pluriels <sup>page 67, 2</sup>	Descriptions <sup>page 67, 3</sup>	Contexte <sup>page 67, 4</sup>	Emplacement <sup>page 67, 5</sup>	Drapeaux <sup>page 67, 8</sup>	États supplémentaires <sup>page 67, 6</sup>
<i>Windows RC files</i>	mono-lingue	non	oui	non	non	non	
<i>Excel Open XML</i>	mono-lingue	non	oui	oui	oui	non	à vérifier
<i>Fichiers de méta-données de l'App Store</i>	mono-lingue	non	non	non	non	non	
<i>Subtitle files</i>	mono-lingue	non	non	non	oui	non	
<i>HTML files</i>	mono-lingue	non	non	non	non	non	
<i>OpenDocument Format</i>	mono-lingue	non	non	non	non	non	
<i>IDML Format</i>	mono-lingue	non	non	non	non	non	
<i>INI translations</i>	mono-lingue	non	non	non	non	non	
<i>Traduction des fichier INI InnoSetup</i>	mono-lingue	non	non	non	non	non	
<i>TermBase eXchange format</i>	bilingue	non	oui	non	non	oui <sup>?</sup>	
<i>Fichiers texte</i>	mono-lingue	non	non	non	non	non	
<i>Stringsdict format</i>	mono-lingue	oui	oui	non	non	non	
<i>Fluent format</i>	mono-lingue	no <sup>12</sup>	oui	non	non	non	

1. Voir *Formats monolingues et bilingues*
2. Les pluriels sont nécessaires pour traduire correctement les chaînes de caractères à nombre variable.
3. Source string descriptions can be used to pass additional info about the string to translate.
4. Le contexte est utilisé pour différencier des chaînes identiques utilisées dans des endroits différents (par exemple *Mer* peut être utilisé comme abrégé de « mercredi » ou comme nom pour une étendue d'eau).
5. L'emplacement d'une chaîne dans le code source peut aider les traducteurs compétents à comprendre comment la chaîne est utilisée.
8. Voir *Customizing behavior using flags*
6. Additional states supported by the file format in addition to « Untranslated » and « Translated ».
9. Les commentaires de type gettext sont utilisés comme des drapeaux.
10. Les drapeaux sont extraits de l'attribut non standard `weblate-flags` pour tous les formats basés sur XML. En outre, l'attribut `max-length:N` est pris en charge à travers l'attribut `maxwidth attribute` tel que défini dans la norme XLIFF, voir *Specifying translation flags*.
7. XML comment placed before the `<string>` element, parsed as a source string description.
11. Les pluriels ne sont pris en charge que pour Laravel qui les utilise dans la syntaxe des chaînes de caractères pour les définir, voir *Localization in Laravel*.
12. Plurals are handled in the syntax of the strings and not exposed as plurals in Weblate.

## Chaînes en lecture seule

Nouveau dans la version 3.10.

Read-only strings from translation files will be included, but can not be edited in Weblate. This feature is natively supported by few formats (*XLIFF* and *Android string resources*), but can be emulated in others by adding a read-only flag, see *Customizing behavior using flags*.

### 1.10.4 GNU gettext

Format le plus largement utilisé pour la traduction des logiciels libres.

Les informations contextuelles stockées dans le fichier sont prises en charge en ajustant ses en-têtes ou en établissant des liens avec les fichiers sources correspondants.

Un fichier PO gettext bilingue ressemble généralement à ceci :

```
#: weblate/media/js/bootstrap-datepicker.js:1421
msgid "Monday"
msgstr "Pondělí"

#: weblate/media/js/bootstrap-datepicker.js:1421
msgid "Tuesday"
msgstr "Úterý"

#: weblate/accounts/avatar.py:163
msgctxt "No known user"
msgid "None"
msgstr "Žádný"
```

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	po/* .po
Fichier de langue de base mono-langue	<i>Vide</i>
Modèle pour les nouvelles traductions	po/messages.pot
Format de fichier	<i>Fichier gettext PO</i>

#### Voir aussi :

[devel/gettext](#), [devel/sphinx](#), [Gettext on Wikipedia](#), [PO Files](#), *Mettre à jour la variable ALL\_LINGUAS dans le fichier « configure »*, *Personnaliser la sortie gettext*, *Mettre à jour le fichier LINGUAS*, *Générer des fichiers MO*, *Mettre à jour les fichiers PO afin qu'ils correspondent au POT (msgmerge)*

## Gettext monolingue

Certains projets décident d'utiliser gettext comme format monolingue — ils codifient uniquement les identifiants dans leur code source et la chaîne doit ensuite être traduite dans toutes les langues, y compris en anglais. Cela est pris en charge, mais il est nécessaire d'explicitement choisir ce format de fichier lors de l'importation du composant dans Weblate.

Un fichier gettext PO monolingue ressemble généralement à ceci :

```
#: weblate/media/js/bootstrap-datepicker.js:1421
msgid "day-monday"
msgstr "Pondělí"

#: weblate/media/js/bootstrap-datepicker.js:1421
msgid "day-tuesday"
msgstr "Úterý"
```

(suite sur la page suivante)



(suite de la page précédente)

```
#: weblate/accounts/avatar.py:163
msgid "none-user"
msgstr "Žádný"
```

Tandis que le fichier de langue de base ressemblera à ceci :

```
#: weblate/media/js/bootstrap-datepicker.js:1421
msgid "day-monday"
msgstr "Monday"

#: weblate/media/js/bootstrap-datepicker.js:1421
msgid "day-tuesday"
msgstr "Tuesday"

#: weblate/accounts/avatar.py:163
msgid "none-user"
msgstr "None"
```

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	po/* .po
Fichier de langue de base mono-langue	po/en .po
Modèle pour les nouvelles traductions	po/messages .pot
Format de fichier	<i>Fichier gettext PO (monolingue)</i>

### 1.10.5 XLIFF

Format basé sur XML créé pour normaliser les fichiers de traduction, mais en fin de compte, ce n'est qu'une des trop nombreuses normes du domaine.

*XML Localization Interchange File Format (XLIFF)* est généralement utilisé comme fichier bilingue, mais Weblate prend également en charge la version monolingue.

#### Voir aussi :

Spécification du format de fichier *XML Localization Interchange File Format (XLIFF)*

### États de traduction

Modifié dans la version 3.3 : Weblate ignored the `state` attribute prior to the 3.3 release.

The `state` attribute in the file is partially processed and mapped to the « Needs edit » state in Weblate (the following states are used to flag the string as needing edit if there is a target present : `new`, `needs-translation`, `needs-adaptation`, `needs-l10n`). Should the `state` attribute be missing, a string is considered translated as soon as a `<target>` element exists.

If the translation string has `approved="yes"`, it will also be imported into Weblate as « Approved », anything else will be imported as « Waiting for review » (which matches the XLIFF specification).

While saving, Weblate doesn't add those attributes unless necessary :

- The `state` attribute is only added in case string is marked as needing edit.
- The `approved` attribute is only added in case string has been reviewed.
- In other cases the attributes are not added, but they are updated in case they are present.

That means that when using the XLIFF format, it is strongly recommended to turn on the Weblate review process, in order to see and change the approved state of strings.

Similarly upon importing such files (in the upload form), you should choose *Import as translated* under *Processing of strings needing edit*.

Voir aussi :

*Dedicated reviewers*

## Whitespace and newlines in XLIFF

Generally types or amounts of whitespace is not differentiated between in XML formats. If you want to keep it, you have to add the `xml:space="preserve"` flag to the string.

Par exemple :

```
<trans-unit id="10" approved="yes">
  <source xml:space="preserve">hello</source>
  <target xml:space="preserve">Hello, world!
</target>
</trans-unit>
```

## Specifying translation flags

You can specify additional translation flags (see *Customizing behavior using flags*) by using the `weblate-flags` attribute. Weblate also understands `maxwidth` and `font` attributes from the XLIFF specification :

```
<trans-unit id="10" maxwidth="100" size-unit="pixel" font="ubuntu;22:bold">
  <source>Hello %s</source>
</trans-unit>
<trans-unit id="20" maxwidth="100" size-unit="char" weblate-flags="c-format">
  <source>Hello %s</source>
</trans-unit>
```

The `font` attribute is parsed for font family, size and weight, the above example shows all of that, though only font family is required. Any whitespace in the font family is converted to underscore, so `Source Sans Pro` becomes `Source_Sans_Pro`, please keep that in mind when naming the font group (see *Gestion des polices*).

## Clés de chaîne

Weblate identifies the units in the XLIFF file by `resname` attribute in case it is present and falls back to `id` (together with `file` tag if present).

The `resname` attribute is supposed to be human friendly identifier of the unit making it more suitable for Weblate to display instead of `id`. The `resname` has to be unique in the whole XLIFF file. This is required by Weblate and is not covered by the XLIFF standard - it does not put any uniqueness restrictions on this attribute.

Typical Weblate <i>Configuration des composants</i> for bilingual XLIFF	
Masque de fichier	<code>localizations/*.xliff</code>
Fichier de langue de base mono-langue	<i>Vide</i>
Modèle pour les nouvelles traductions	<code>localizations/en-US.xliff</code>
Format de fichier	<i>XLIFF Translation File</i>

Typical Weblate <i>Configuration des composants</i> for monolingual XLIFF	
Masque de fichier	<code>localizations/*.xliff</code>
Fichier de langue de base mono-langue	<code>localizations/en-US.xliff</code>
Modèle pour les nouvelles traductions	<code>localizations/en-US.xliff</code>
Format de fichier	<i>XLIFF Translation File</i>

Voir aussi :

[XLIFF on Wikipedia](#), [XLIFF](#), [font attribute in XLIFF 1.2](#), [maxwidth attribute in XLIFF 1.2](#)

### 1.10.6 Java properties

Native Java format for translations.

Java properties are usually used as monolingual translations.

Weblate supports ISO-8859-1, UTF-8 and UTF-16 variants of this format. All of them support storing all Unicode characters, it is just differently encoded. In the ISO-8859-1, the Unicode escape sequences are used (for example `zkou\u0161ka`), all others encode characters directly either in UTF-8 or UTF-16.

---

**Note :** Loading escape sequences works in UTF-8 mode as well, so please be careful choosing the correct encoding set to match your application needs.

---

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	<code>src/app/Bundle_*.properties</code>
Fichier de langue de base mono-langue	<code>src/app/Bundle.properties</code>
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>Java Properties (ISO-8859-1)</i>

**Voir aussi :**

Java properties on Wikipedia, Mozilla and Java properties files, *mi18n lang files*, *Propriétés GWT*, updating-target-files, *Formate le fichier de propriétés Java*, *Nettoyer les fichiers de traduction*

### 1.10.7 mi18n lang files

Nouveau dans la version 4.7.

File format used for JavaScript localization by *mi18n*. Syntactically it matches *Java properties*.

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	<code>*.lang</code>
Fichier de langue de base mono-langue	<code>en-US.lang</code>
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>mi18n lang file</i>

**Voir aussi :**

*mi18n* Mozilla and Java properties files, *Java properties*, updating-target-files, *Formate le fichier de propriétés Java*, *Nettoyer les fichiers de traduction*

### 1.10.8 Propriétés GWT

Native GWT format for translations.

GWT properties are usually used as monolingual translations.

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	<code>src/app/Bundle_*.properties</code>
Fichier de langue de base mono-langue	<code>src/app/Bundle.properties</code>
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>GWT Properties</i>

**Voir aussi :**

GWT localization guide, GWT Internationalization Tutorial, Mozilla and Java properties files, updating-target-files, *Formate le fichier de propriétés Java*, *Nettoyer les fichiers de traduction*

### 1.10.9 INI translations

Nouveau dans la version 4.1.

INI file format for translations.

INI translations are usually used as monolingual translations.

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	language/*.ini
Fichier de langue de base mono-langue	language/en.ini
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>INI File</i>

---

**Note :** Weblate only extracts keys from sections within an INI file. In case your INI file lacks sections, you might want to use *Joomla translations* or *Java properties* instead.

---

**Voir aussi :**

*INI Files*, *Java properties*, *Joomla translations*, *Traduction des fichier INI InnoSetup*

### 1.10.10 Traduction des fichier INI InnoSetup

Nouveau dans la version 4.1.

Format des fichiers Inno Setup INI pour les traductions.

Les traductions de fichiers Inno Setup INI sont généralement utilisées comme des traductions mono-langue.

---

**Note :** The only notable difference to *INI translations* is in supporting %n and %t placeholders for line break and tab.

---

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	language/*.islu
Fichier de langue de base mono-langue	language/en.islu
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>Fichier INI InnoSetup</i>

---

**Note :** Only Unicode files (.islu) are currently supported, ANSI variant (.isl) is currently not supported.

---

**Voir aussi :**

*INI Files*, *Joomla translations*, *INI translations*

### 1.10.11 Joomla translations

Nouveau dans la version 2.12.

Native Joomla format for translations.

Joomla translations are usually used as monolingual translations.

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	language/*/com_foobar.ini
Fichier de langue de base mono-langue	language/en-GB/com_foobar.ini
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>Joomla Language File</i>

**Voir aussi :**

Mozilla and Java properties files, *INI translations*, *Traduction des fichier INI InnoSetup*

### 1.10.12 Qt Linguist .ts

Translation format used in Qt based applications.

Qt Linguist files are used as both bilingual and monolingual translations.

Typical Weblate <i>Configuration des composants</i> when using as bilingual	
Masque de fichier	i18n/app.*.ts
Fichier de langue de base mono-langue	<i>Vide</i>
Modèle pour les nouvelles traductions	i18n/app.de.ts
Format de fichier	<i>Qt Linguist Translation File</i>

Typical Weblate <i>Configuration des composants</i> when using as monolingual	
Masque de fichier	i18n/app.*.ts
Fichier de langue de base mono-langue	i18n/app.en.ts
Modèle pour les nouvelles traductions	i18n/app.en.ts
Format de fichier	<i>Qt Linguist Translation File</i>

**Voir aussi :**

Qt Linguist manual, Qt .ts, *Formats monolingues et bilingues*

### 1.10.13 Android string resources

Android specific file format for translating applications.

Android string resources are monolingual, the *Fichier de langue de base mono-langue* is stored in a different location from the other files – res/values/strings.xml.

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	res/values-*/strings.xml
Fichier de langue de base mono-langue	res/values/strings.xml
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>Android String Resource</i>

**Voir aussi :**

Android string resources documentation, Android string resources

**Note :** Android *string-array* structures are not currently supported. To work around this, you can break your string arrays apart :

```
<string-array name="several_strings">
  <item>First string</item>
  <item>Second string</item>
</string-array>
```

devient :

```
<string-array name="several_strings">
  <item>@string/several_strings_0</item>
  <item>@string/several_strings_1</item>
</string-array>
<string name="several_strings_0">First string</string>
<string name="several_strings_1">Second string</string>
```

The *string-array* that points to the *string* elements should be stored in a different file, and not be made available for translation.

This script may help pre-process your existing strings.xml files and translations : <https://gist.github.com/paour/11291062>

---

### 1.10.14 Apple iOS strings

Apple specific file format for translating applications, used for both iOS and iPhone/iPad application translations.

Apple iOS strings are usually used as bilingual translations.

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	Resources/*.lproj/Localizable.strings
Fichier de langue de base mono-langue	Resources/en.lproj/Localizable.strings ou Resources/Base.lproj/Localizable.strings
Modèle pour les nouvelles traductions	Vide
Format de fichier	iOS Strings (UTF-8)

**Voir aussi :**

*Stringsdict format*, Apple « strings files » documentation, Mac OSX strings

### 1.10.15 Chaînes de caractères PHP

PHP translations are usually monolingual, so it is recommended to specify a base file with (what is most often the) English strings.

Example file :

```
<?php
$LANG['foo'] = 'bar';
$LANG['foo1'] = 'foo bar';
$LANG['foo2'] = 'foo bar baz';
$LANG['foo3'] = 'foo bar baz bag';
```

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	lang/*/texts.php
Fichier de langue de base mono-langue	lang/en/texts.php
Modèle pour les nouvelles traductions	lang/en/texts.php
Format de fichier	PHP strings

## Chaînes de caractères PHP Laravel

Modifié dans la version 4.1.

The Laravel PHP localization files are supported as well with plurals :

```
<?php
return [
    'welcome' => 'Welcome to our application',
    'apples' => 'There is one apple|There are many apples',
];
```

**Voir aussi :**

PHP, Localization in Laravel

### 1.10.16 JSON files

Nouveau dans la version 2.0.

Modifié dans la version 2.16 : Since Weblate 2.16 and with [translate-toolkit](#) at-least 2.2.4, nested structure JSON files are supported as well.

Modifié dans la version 4.3 : The structure of JSON file is properly preserved even for complex situations which were broken in prior releases.

JSON format is used mostly for translating applications implemented in JavaScript.

Weblate currently supports several variants of JSON translations :

- Simple key / value files, used for example by *vue-i18n* or *react-intl*.
- Files with nested keys.
- *JSON i18next files*
- *go-i18n JSON files*
- *WebExtension JSON*
- *ARB File*

JSON translations are usually monolingual, so it is recommended to specify a base file with (what is most often the) English strings.

Example file :

```
{
  "Hello, world!\n": "Ahoj světe!\n",
  "Orangutan has %d banana.\n": "",
  "Try Weblate at https://demo.weblate.org/!\n": "",
  "Thank you for using Weblate.": ""
}
```

Nested files are supported as well (see above for requirements), such a file can look like :

```
{
  "weblate": {
    "hello": "Ahoj světe!\n",
    "orangutan": "",
    "try": "",
    "thanks": ""
  }
}
```

**Indication :** The *JSON file* and *JSON nested structure file* can both handle same type of files. Both preserve existing JSON structure when translating.

The only difference between them is when adding new strings using Weblate. The nested structure format parses the newly added key and inserts the new string into the matching structure. For example `app.name` key is inserted as :

```
{
  "app": {
    "name": "Weblate"
  }
}
```

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	<code>langs/translation-*.json</code>
Fichier de langue de base mono-langue	<code>langs/translation-en.json</code>
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>JSON nested structure file</i>

**Voir aussi :**

[JSON](#), [updating-target-files](#), [Personnaliser la sortie JSON](#), [Nettoyer les fichiers de traduction](#),

### 1.10.17 JSON i18next files

Modifié dans la version 2.17 : Since Weblate 2.17 and with [translate-toolkit](#) at-least 2.2.5, i18next JSON files with plurals are supported as well.

[i18next](#) is an internationalization framework written in and for JavaScript. Weblate supports its localization files with features such as plurals.

i18next translations are monolingual, so it is recommended to specify a base file with (what is most often the) English strings.

---

**Note :** Weblate supports the i18next JSON v3 format. The v2 and v1 variants are mostly compatible, with exception of how plurals are handled.

The v4 variant uses different approach for storing plurals and is currently not supported.

---

Example file :

```
{
  "hello": "Hello",
  "apple": "I have an apple",
  "apple_plural": "I have {{count}} apples",
  "apple_negative": "I have no apples"
}
```

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	<code>langs/*.json</code>
Fichier de langue de base mono-langue	<code>langs/en.json</code>
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>i18next JSON file</i>

**Voir aussi :**

[JSON](#), [i18next JSON Format](#), [updating-target-files](#), [Personnaliser la sortie JSON](#), [Nettoyer les fichiers de traduction](#)



### 1.10.18 go-i18n JSON files

Nouveau dans la version 4.1.

go-i18n translations are monolingual, so it is recommended to specify a base file with (what is most often the) English strings.

---

**Note :** Weblate supports the go-i18n JSON v1 format, for flat JSON formats please use *JSON files*. The v2 format with hash is currently not supported.

---

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	langs/*.json
Fichier de langue de base mono-langue	langs/en.json
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>go-i18n JSON file</i>

**Voir aussi :**

[JSON](#), [go-i18n](#), [updating-target-files](#), [Personnaliser la sortie JSON](#), [Nettoyer les fichiers de traduction](#),

### 1.10.19 ARB File

Nouveau dans la version 4.1.

ARB translations are monolingual, so it is recommended to specify a base file with (what is most often the) English strings.

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	lib/l10n/intl_*.arb
Fichier de langue de base mono-langue	lib/l10n/intl_en.arb
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>ARB file</i>

**Voir aussi :**

[JSON](#), [Application Resource Bundle Specification](#), [Internationalizing Flutter apps](#), [updating-target-files](#), [Personnaliser la sortie JSON](#), [Nettoyer les fichiers de traduction](#)

### 1.10.20 WebExtension JSON

Nouveau dans la version 2.16 : This is supported since Weblate 2.16 and with [translate-toolkit](#) at-least 2.2.4.

File format used when translating extensions for Mozilla Firefox or Google Chromium.

---

**Note :** While this format is called JSON, its specification allows to include comments, which are not part of JSON specification. Weblate currently does not support file with comments.

---

Example file :

```
{
  "hello": {
    "message": "Ahoj světe!\n",
    "description": "Description",
    "placeholders": {
      "url": {
```

(suite sur la page suivante)

(suite de la page précédente)

```

        "content": "$1",
        "example": "https://developer.mozilla.org"
    }
},
"orangutan": {
    "message": "",
    "description": "Description"
},
"try": {
    "message": "",
    "description": "Description"
},
"thanks": {
    "message": "",
    "description": "Description"
}
}

```

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	<code>_locales/*/messages.json</code>
Fichier de langue de base mono-langue	<code>_locales/en/messages.json</code>
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>WebExtension JSON file</i>

**Voir aussi :**

JSON, [Google chrome.i18n](#), [Mozilla Extensions Internationalization](#)

**1.10.21 .XML resource files**

Nouveau dans la version 2.3.

A .XML resource (.resx) file employs a monolingual XML file format used in Microsoft .NET applications. It is interchangeable with .resw, when using identical syntax to .resx.

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	<code>Resources/Language.*.resx</code>
Fichier de langue de base mono-langue	<code>Resources/Language.resx</code>
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>Fichier de ressource .Net</i>

**Voir aussi :**

.NET Resource files (.resx), [updating-target-files](#), *Nettoyer les fichiers de traduction*

### 1.10.22 CSV files

Nouveau dans la version 2.4.

CSV files can contain a simple list of source and translation. Weblate supports the following files :

- Files with header defining fields (location, source, target, ID, fuzzy, context, translator\_comments, developer\_comments). This is the recommended approach, as it is the least error prone. Choose *CSV file* as a file format.
- Files with two fields—source and translation (in this order). Choose *Simple CSV file* as a file format.
- Headerless files with fields in order defined by the [translate-toolkit](#) : location, source, target, ID, fuzzy, context, translator\_comments, developer\_comments. Choose *CSV file* as a file format.
- Remember to define *Fichier de langue de base mono-langue* when your files are monolingual (see *Formats monolingues et bilingues*).

**Avertissement :** The CSV format currently automatically detects the dialect of the CSV file. In some cases the automatic detection might fail and you will get mixed results. This is especially true for CSV files with newlines in the values. As a workaround it is recommended to omit quoting characters.

Example file :

Thank you for using Weblate.,Děkujeme za použití Weblate.

<i>Configuration des composants</i> typique de Weblate pour les fichiers CSV bilingues	
Masque de fichier	locale/*.csv
Fichier de langue de base mono-langue	<i>Vide</i>
Modèle pour les nouvelles traductions	locale/en.csv
Format de fichier	<i>CSV file</i>

<i>Configuration des composants</i> typique de Weblate pour les fichiers CSV monolingues	
Masque de fichier	locale/*.csv
Fichier de langue de base mono-langue	locale/en.csv
Modèle pour les nouvelles traductions	locale/en.csv
Format de fichier	<i>Fichier CSV simplifié</i>

**Voir aussi :**

CSV

### 1.10.23 YAML files

Nouveau dans la version 2.9.

The plain YAML files with string keys and values. Weblate also extract strings from lists or dictionaries.

Example of a YAML file :

```
weblate:
  hello: ""
  orangutan": ""
  try": ""
  thanks": ""
```

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	translations/messages.*.yaml
Fichier de langue de base mono-langue	translations/messages.en.yaml
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>YAML file</i>

**Voir aussi :**

[YAML](#), [Ruby YAML files](#)

### 1.10.24 Ruby YAML files

Nouveau dans la version 2.9.

Ruby i18n YAML files with language as root node.

Example Ruby i18n YAML file :

```
cs:
  weblate:
    hello: ""
    orangutan: ""
    try: ""
    thanks: ""
```

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	translations/messages.*.yaml
Fichier de langue de base mono-langue	translations/messages.en.yaml
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>Ruby YAML file</i>

**Voir aussi :**

[YAML](#), [YAML files](#)

### 1.10.25 DTD files

Nouveau dans la version 2.18.

Example DTD file :

```
<!ENTITY hello "">
<!ENTITY orangutan "">
<!ENTITY try "">
<!ENTITY thanks "">
```

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	locale/*.dtd
Fichier de langue de base mono-langue	locale/en.dtd
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>DTD file</i>

**Voir aussi :**

[Mozilla DTD format](#)

## 1.10.26 Flat XML files

Nouveau dans la version 3.9.

Example of a flat XML file :

```
<?xml version='1.0' encoding='UTF-8'?>
<root>
  <str key="hello_world">Hello World!</str>
  <str key="resource_key">Translated value.</str>
</root>
```

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	locale/*.xml
Fichier de langue de base mono-langue	locale/en.xml
Modèle pour les nouvelles traductions	Vide
Format de fichier	Flat XML file

**Voir aussi :**

[Flat XML](#)

## 1.10.27 Windows RC files

Modifié dans la version 4.1 : Support for Windows RC files has been rewritten.

**Note :** Support for this format is currently in beta, feedback from testing is welcome.

Example Windows RC file :

```
LANGUAGE LANG_CZECH, SUBLANG_DEFAULT

STRINGTABLE
BEGIN
    IDS_MSG1          "Hello, world!\n"
    IDS_MSG2          "Orangutan has %d banana.\n"
    IDS_MSG3          "Try Weblate at http://demo.weblate.org/!\n"
    IDS_MSG4          "Thank you for using Weblate."
END
```

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	lang/*.rc
Fichier de langue de base mono-langue	lang/en-US.rc
Modèle pour les nouvelles traductions	lang/en-US.rc
Format de fichier	RC file

**Voir aussi :**

[Windows RC files](#)

## 1.10.28 Fichiers de métadonnées de l'App Store

Nouveau dans la version 3.5.

Metadata used for publishing apps in various app stores can be translated. Currently the following tools are compatible :

- [Triple-T gradle-play-publisher](#)
- [Fastlane](#)
- [F-Droid](#)

The metadata consists of several textfiles, which Weblate will present as separate strings to translate.

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	<code>fastlane/android/metadata/*</code>
Fichier de langue de base mono-langue	<code>fastlane/android/metadata/en-US</code>
Modèle pour les nouvelles traductions	<code>fastlane/android/metadata/en-US</code>
Format de fichier	<i>App store metadata files</i>

---

**Indication :** In case you don't want to translate certain strings (for example changelogs), mark them read-only (see *Customizing behavior using flags*). This can be automated by the *Modification en masse*.

---

## 1.10.29 Subtitle files

Nouveau dans la version 3.7.

Weblate peut traduire divers fichiers de sous-titres :

- SubRip subtitle file (`*.srt`)
- MicroDVD subtitle file (`*.sub`)
- Advanced Substation Alpha subtitles file (`*.ass`)
- Substation Alpha subtitle file (`*.ssa`)

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	<code>path/*.srt</code>
Fichier de langue de base mono-langue	<code>path/en.srt</code>
Modèle pour les nouvelles traductions	<code>path/en.srt</code>
Format de fichier	<i>SubRip subtitle file</i>

**Voir aussi :**

[Subtitles](#)

## 1.10.30 Excel Open XML

Nouveau dans la version 3.2.

Excel Open XML (.xlsx) files can be imported and exported.

When uploading XLSX files for translation, be aware that only the active worksheet is considered, and there must be at least a column called `source` (which contains the source string) and a column called `target` (which contains the translation). Additionally there should be the column called `context` (which contains the context path of the translation string). If you use the XLSX download for exporting the translations into an Excel workbook, you already get a file with the correct file format.

### 1.10.31 HTML files

Nouveau dans la version 4.1.

---

**Note :** Support for this format is currently in beta, feedback from testing is welcome.

---

The translatable content is extracted from the HTML files and offered for the translation.

**Voir aussi :**

[HTML](#)

### 1.10.32 Fichiers texte

Nouveau dans la version 4.6.

---

**Note :** Support for this format is currently in beta, feedback from testing is welcome.

---

The translatable content is extracted from the plain text files and offered for the translation. Each paragraph is translated as a separate string.

Il existe trois variantes de ce format :

- Fichier texte brut
- Fichier texte DokuWiki
- Fichier texte MediaWiki

**Voir aussi :**

[Simple Text Documents](#)

### 1.10.33 OpenDocument Format

Nouveau dans la version 4.1.

---

**Note :** Support for this format is currently in beta, feedback from testing is welcome.

---

The translatable content is extracted from the OpenDocument files and offered for the translation.

**Voir aussi :**

[OpenDocument Format](#)

### 1.10.34 IDML Format

Nouveau dans la version 4.1.

---

**Note :** Support for this format is currently in beta, feedback from testing is welcome.

---

The translatable content is extracted from the Adobe InDesign Markup Language files and offered for the translation.

### 1.10.35 TermBase eXchange format

Nouveau dans la version 4.5.

TBX is an XML format for the exchange of terminology data.

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	tbx/*.tbx
Fichier de langue de base mono-langue	<i>Vide</i>
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>TermBase eXchange file</i>

**Voir aussi :**

[TBX on Wikipedia](#), [TBX](#), [Glossaire](#)

### 1.10.36 Stringsdict format

Nouveau dans la version 4.8.

---

**Note :** Support for this format is currently in beta, feedback from testing is welcome.

---

XML based format used by Apple which is able to store plural forms of a string.

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	Resources/*.lproj/Localizable.stringsdict
Fichier de langue de base mono-langue	Resources/en.lproj/Localizable.stringsdict or Resources/Base.lproj/Localizable.stringsdict
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>Stringsdict file</i>

**Voir aussi :**

[Apple iOS strings](#), [Stringsdict File Format](#)

### 1.10.37 Fluent format

Nouveau dans la version 4.8.

---

**Note :** Support for this format is currently in beta, feedback from testing is welcome.

---

Fluent is a monolingual text format that focuses on asymmetric localization : a simple string in one language can map to a complex multi-variant translation in another language.

<i>Configuration des composants</i> typique de Weblate	
Masque de fichier	locales/*/messages.ftl
Fichier de langue de base mono-langue	locales/en/messages.ftl
Modèle pour les nouvelles traductions	<i>Vide</i>
Format de fichier	<i>Fluent file</i>

**Voir aussi :**

[Project Fluent website](#)



### 1.10.38 Supporting other formats

Most formats supported by [translate-toolkit](#) which support serializing can be easily supported, but they did not (yet) receive any testing. In most cases some thin layer is needed in Weblate to hide differences in behavior of different [translate-toolkit](#) storages.

To add support for a new format, the preferred approach is to first implement support for it in the [translate-toolkit](#).

**Voir aussi :**

[Translation Related File Formats](#)

## 1.11 Intégration avec le système de contrôle de versions

Weblate currently supports [Git](#) (with extended support for [GitHub pull requests](#), [Gerrit](#) and [Subversion](#)) and [Mercurial](#) as version control back-ends.

### 1.11.1 Accessing repositories

The VCS repository you want to use has to be accessible to Weblate. With a publicly available repository you just need to enter the correct URL (for example `https://github.com/WeblateOrg/weblate.git`), but for private repositories or for push URLs the setup is more complex and requires authentication.

#### Accessing repositories from Hosted Weblate

For Hosted Weblate there is a dedicated push user registered on GitHub, Bitbucket, Codeberg and GitLab (with the username *weblate*, e-mail `hosted@weblate.org` and, named *Weblate push user*). You need to add this user as a collaborator and give it appropriate permission to your repository (read-only is okay for cloning, write is required for pushing). Depending on service and your organization settings, this happens immediately, or requires confirmation on the Weblate side.

The *weblate* user on GitHub accepts invitations automatically within five minutes. Manual processing might be needed on the other services, so please be patient.

Once the *weblate* user is added, you can configure [Dépôt du code source](#) and [URL pour l'envoi du dépôt](#) using the SSH protocol (for example `git@github.com:WeblateOrg/weblate.git`).

#### SSH repositories

The most frequently used method to access private repositories is based on SSH. Authorize the public Weblate SSH key (see [Weblate SSH key](#)) to access the upstream repository this way.

**Avertissement :** On GitHub, each key can only be used once, see [GitHub repositories](#) and [Accessing repositories from Hosted Weblate](#).

Weblate also stores the host key fingerprint upon first connection, and fails to connect to the host should it be changed later (see [Verifying SSH host keys](#)).

In case adjustment is needed, do so from the Weblate admin interface :

W Weblate

Dashboard

Projects ▾

Languages ▾

Checks ▾

🔧

+

🌐

...

Manage / SSH keys

Webplate status

Backups

Translation memory

Performance report

SSH keys

Alerts

Repositories

Users

Appearance

Tools

Billing

Public SSH key

Webplate uses SSH key to access remote repositories. The corresponding public key is found below, you can use it to grant Webplate access to a repository.

ssh-rsa  
AAAAB3NzaC1yc2EAAAADAQABAAQCAQC+sXq6SAnRHq9VMsp8tEXhSuePft7e91eP6kyA8U4/QQmoigRy7y+nl3fMNaQflmq8C81EEu4s1r9b9rmi/U7MIYf6Q1wl0mz/  
Webplate

Download private key

Known host keys

Hostname	Key type	Fingerprint
github.com	ssh-ed25519	+DIY3wwV6TuJJhbpZisF/zLDA0zPMSvHdkr4UvCOqU
github.com	ecdsa-sha2-nistp256	p2QAMXNIC1TJYWeIOttrVc98/R1BUFWu3/LiyKgUfQM
github.com	ssh-rsa	nThbg6kXUpJWGf7E1IGOCspRomTxdCARLviKw6E5SY8

Add host key

To access SSH hosts, its host key needs to be verified. You can get the host key by entering a domain name or IP for the host in the form below.

Hostname  Port

Submit

Powered by Weblate 4.11 [About Weblate](#) [Legal](#) [Contact](#) [Documentation](#) [Donate to Weblate](#)

## Weblate SSH key

The Weblate public key is visible to all users browsing the *About* page.

Admins can generate or display the public key currently used by Weblate in the connection (from *SSH keys*) on the admin interface landing page.

---

**Note :** The corresponding private SSH key can not currently have a password, so make sure it is well protected.

---

---

**Indication :** Make a backup of the generated private Weblate SSH key.

---

86

Chapitre 1. Documentation pour l'utilisateur

## Verifying SSH host keys

Weblate automatically stores the SSH host keys on first access and remembers them for further use.

In case you want to verify the key fingerprint before connecting to the repository, add the SSH host keys of the servers you are going to access in *Add host key*, from the same section of the admin interface. Enter the hostname you are going to access (e.g. `gitlab.com`), and press *Submit*. Verify its fingerprint matches the server you added.

The added keys with fingerprints are shown in the confirmation message :

The screenshot displays the 'SSH keys' section of the Weblate admin interface. At the top, a confirmation message states that host keys for `github.com` have been added with their respective fingerprints. Below this, the 'Public SSH key' section shows the key type as `ssh-rsa` and provides a long alphanumeric fingerprint. A 'Download private key' button is available. The 'Known host keys' section contains a table with three columns: Hostname, Key type, and Fingerprint. It lists three entries for `github.com` with different key types and fingerprints. Finally, the 'Add host key' section provides a form with 'Hostname' (pre-filled with `github.com`) and 'Port' (pre-filled with `Port`) fields, and a 'Submit' button.

Hostname	Key type	Fingerprint
github.com	ssh-ed25519	+DiY3wvW6TuJJhbpZisF/zLDA0zPMSvHdkr4UvCOqU
github.com	ecdsa-sha2-nistp256	p2QAMXNIC1TJYWeIOttrVc98/R1BUFWu3/LiyKgUfQM
github.com	ssh-rsa	nThbg6kXUpJWG17E1IGOCspRomTxdCARLviKw6E5SY8

## GitHub repositories

Access via SSH is possible (see [SSH repositories](#)), but in case you need to access more than one repository, you will hit a GitHub limitation on allowed SSH key usage (since each key can be used only once).

In case the *Pousser la branche* is not set, the project is forked and changes pushed through a fork. In case it is set, changes are pushed to the upstream repository and chosen branch.

For smaller deployments, use HTTPS authentication with a personal access token and your GitHub account, see [Creating an access token for command-line use](#).

For bigger setups, it is usually better to create a dedicated user for Weblate, assign it the public SSH key generated in Weblate (see [Weblate SSH key](#)) and grant it access to all the repositories you want to translate. This approach is also used for Hosted Weblate, there is dedicated *weblate* user for that.

### Voir aussi :

[Accessing repositories from Hosted Weblate](#)

## Weblate internal URLs

Share one repository setup between different components by referring to its placement as `weblate://project/component` in other(linked) components. This way linked components use the VCS repository configuration of the main(referenced) component.

**Avertissement :** Removing main component also removes linked components.

Weblate automatically adjusts the repository URL when creating a component if it finds a component with a matching repository setup. You can override this in the last step of the component configuration.

Reasons to use this :

- Saves disk space on the server, the repository is stored just once.
- Makes the updates faster, only one repository is updated.
- There is just single exported repository with Weblate translations (see [Exportateur Git](#)).
- Some add-ons can operate on multiple components sharing one repository, for example [Écrasement des archivages Git](#).

## HTTPS repositories

To access protected HTTPS repositories, include the username and password in the URL. Don't worry, Weblate will strip this info when the URL is shown to users (if even allowed to see the repository URL at all).

For example the GitHub URL with authentication added might look like : `https://user:your_access_token@github.com/WeblateOrg/weblate.git`.

---

**Note :** If your username or password contains special characters, those have to be URL encoded, for example `https://user%40example.com:%24password%23@bitbucket.org/....`

---

## Using proxy

If you need to access HTTP/HTTPS VCS repositories using a proxy server, configure the VCS to use it.

This can be done using the `http_proxy`, `https_proxy`, and `all_proxy` environment variables, (as described in the [cURL documentation](#)) or by enforcing it in the VCS configuration, for example :

```
git config --global http.proxy http://user:password@proxy.example.com:80
```

**Note :** The proxy configuration needs to be done under user running Weblate (see also *Permissions du système de fichiers*) and with `HOME=$DATA_DIR/home` (see [DATA\\_DIR](#)), otherwise Git executed by Weblate will not use it.

### Voir aussi :

The [cURL manpage](#), [Git config documentation](#)

## 1.11.2 Git

**Indication :** Weblate needs Git 2.12 or newer.

### Voir aussi :

See [Accessing repositories](#) for info on how to access different kinds of repositories.

### Git avec force push

This behaves exactly like Git itself, the only difference being that it always force pushes. This is intended only in the case of using a separate repository for translations.

**Avertissement :** Use with caution, as this easily leads to lost commits in your upstream repository.

## Customizing Git configuration

Weblate invokes all VCS commands with `HOME=$DATA_DIR/home` (see [DATA\\_DIR](#)), therefore editing the user configuration needs to be done in `DATA_DIR/home/.git`.

### Git remote helpers

You can also use Git [remote helpers](#) for additionally supporting other version control systems, but be prepared to debug problems this may lead to.

At this time, helpers for Bazaar and Mercurial are available within separate repositories on GitHub : [git-remote-hg](#) and [git-remote-bzr](#). Download them manually and put somewhere in your search path (for example `~/bin`). Make sure you have the corresponding version control systems installed.

Once you have these installed, such remotes can be used to specify a repository in Weblate.

To clone the `gnuhello` project from Launchpad using Bazaar :

```
bzr::lp:gnuhello
```

For the `hello` repository from `selenic.com` using Mercurial :

```
hg::http://selenic.com/repo/hello
```

**Avertissement :** The inconvenience of using Git remote helpers is for example with Mercurial, the remote helper sometimes creates a new tip when pushing changes back.

### 1.11.3 GitHub pull requests

Nouveau dans la version 2.3.

This adds a thin layer atop *Git* using the *GitHub API* to allow pushing translation changes as pull requests, instead of pushing directly to the repository.

*Git* pushes changes directly to a repository, while *GitHub pull requests* creates pull requests. The latter is not needed for merely accessing Git repositories.

You need to configure API credentials (*GITHUB\_CREDENTIALS*) in the Weblate settings to make this work. Once configured, you will see a *GitHub* option when selecting *Système de contrôle de version*.

**Voir aussi :**

*Pushing changes from Weblate, GITHUB\_USERNAME, GITHUB\_TOKEN, GITHUB\_CREDENTIALS*

### 1.11.4 GitLab merge requests

Nouveau dans la version 3.9.

This just adds a thin layer atop *Git* using the *GitLab API* to allow pushing translation changes as merge requests instead of pushing directly to the repository.

There is no need to use this to access Git repositories, ordinary *Git* works the same, the only difference is how pushing to a repository is handled. With *Git* changes are pushed directly to the repository, while *GitLab merge requests* creates merge request.

You need to configure API credentials (*GITLAB\_CREDENTIALS*) in the Weblate settings to make this work. Once configured, you will see a *GitLab* option when selecting *Système de contrôle de version*.

**Voir aussi :**

*Pushing changes from Weblate, GITLAB\_USERNAME, GITLAB\_TOKEN, GITLAB\_CREDENTIALS*

### 1.11.5 Pagure merge requests

Nouveau dans la version 4.3.2.

This just adds a thin layer atop *Git* using the *Pagure API* to allow pushing translation changes as merge requests instead of pushing directly to the repository.

There is no need to use this to access Git repositories, ordinary *Git* works the same, the only difference is how pushing to a repository is handled. With *Git* changes are pushed directly to the repository, while *Pagure merge requests* creates merge request.

You need to configure API credentials (*PAGURE\_CREDENTIALS*) in the Weblate settings to make this work. Once configured, you will see a *Pagure* option when selecting *Système de contrôle de version*.

**Voir aussi :**

*Pushing changes from Weblate, PAGURE\_USERNAME, PAGURE\_TOKEN, PAGURE\_CREDENTIALS*

### 1.11.6 Gerrit

Nouveau dans la version 2.2.

Adds a thin layer atop [Git](#) using the [git-review](#) tool to allow pushing translation changes as Gerrit review requests, instead of pushing them directly to the repository.

The Gerrit documentation has the details on the configuration necessary to set up such repositories.

### 1.11.7 Mercurial

Nouveau dans la version 2.1.

Mercurial is another VCS you can use directly in Weblate.

---

**Note :** It should work with any Mercurial version, but there are sometimes incompatible changes to the command-line interface which breaks Weblate integration.

---

**Voir aussi :**

See [Accessing repositories](#) for info on how to access different kinds of repositories.

### 1.11.8 Subversion

Nouveau dans la version 2.8.

Weblate uses [git-svn](#) to interact with [subversion](#) repositories. It is a Perl script that lets subversion be used by a Git client, enabling users to maintain a full clone of the internal repository and commit locally.

---

**Note :** Weblate tries to detect Subversion repository layout automatically - it supports both direct URLs for branch or repositories with standard layout (branches/, tags/ and trunk/). More info about this is to be found in the [git-svn documentation](#). If your repository does not have a standard layout and you encounter errors, try including the branch name in the repository URL and leaving branch empty.

---

Modifié dans la version 2.19 : Before this, only repositories using the standard layout were supported.

#### Subversion credentials

Weblate expects you to have accepted the certificate up-front (and your credentials if needed). It will look to insert them into the `DATA_DIR` directory. Accept the certificate by using `svn` once with the `$HOME` environment variable set to the `DATA_DIR` :

```
# Use DATA_DIR as configured in Weblate settings.py, it is /app/data in the Docker
HOME=${DATA_DIR}/home svn co https://svn.example.com/example
```

**Voir aussi :**

`DATA_DIR`

## 1.11.9 Local files

## 1.11.10 Git

---

**Indication :** Underneath, this uses *Git*. It requires Git installed and allows you to switch to using Git natively with full history of your translations.

---

Nouveau dans la version 3.8.

Weblate can also operate without a remote VCS. The initial translations are imported by uploading them. Later you can replace individual files by file upload, or add translation strings directly from Weblate (currently available only for monolingual translations).

In the background Weblate creates a Git repository for you and all changes are tracked in. In case you later decide to use a VCS to store the translations, you already have a repository within Weblate can base your integration on.

## 1.12 API REST de Weblate

Nouveau dans la version 2.6 : The REST API is available since Weblate 2.6.

The API is accessible on the `/api/` URL and it is based on [Django REST framework](#). You can use it directly or by *Client Weblate*.

### 1.12.1 Authentification et paramètres génériques

The public project API is available without authentication, though unauthenticated requests are heavily throttled (by default to 100 requests per day), so it is recommended to use authentication. The authentication uses a token, which you can get in your profile. Use it in the `Authorization` header :

**ANY /**

Generic request behaviour for the API, the headers, status codes and parameters here apply to all endpoints as well.

#### Paramètres de requête

- **format** – Response format (overrides [Accept](#)). Possible values depends on REST framework setup, by default `json` and `api` are supported. The latter provides web browser interface for API.
- **page** – Returns given page of paginated results (use `next` and `previous` fields in response to automate the navigation).

#### En-têtes de requête

- [Accept](#) – the response content type depends on [Accept](#) header
- [Authorization](#) – optional token to authenticate as `Authorization: Token YOUR-TOKEN`

#### En-têtes de réponse

- [Content-Type](#) – this depends on [Accept](#) header of request
- [Allow](#) – list of allowed HTTP methods on object

#### Response JSON Object

- **detail** (*string*) – verbose description of the result (for HTTP status codes other than [200 OK](#))
- **count** (*int*) – total item count for object lists
- **next** (*string*) – next page URL for object lists
- **previous** (*string*) – previous page URL for object lists
- **results** (*array*) – results for object lists
- **url** (*string*) – URL to access this resource using API
- **web\_url** (*string*) – URL to access this resource using web browser



**Codes d'état**

- 200 OK – when request was correctly handled
- 201 Created – when a new object was created successfully
- 204 No Content – when an object was deleted successfully
- 400 Bad Request – when form parameters are missing
- 403 Forbidden – when access is denied
- 429 Too Many Requests – when throttling is in place

**Jetons d'authentification**

Modifié dans la version 4.10 : Project scoped tokens were introduced in the 4.10 release.

Each user has his personal access token which can be obtained in the user profile. Newly generated user tokens have the `wlu_` prefix.

It is possible to create project scoped tokens for API access to given project only. These tokens can be identified by the `wlp_` prefix.

**Exemples d'authentification****Exemple de requête :**

```
GET /api/ HTTP/1.1
Host: example.com
Accept: application/json, text/javascript
Authorization: Token YOUR-TOKEN
```

**Exemple de réponse :**

```
HTTP/1.0 200 OK
Date: Fri, 25 Mar 2016 09:46:12 GMT
Server: WSGIServer/0.1 Python/2.7.11+
Vary: Accept, Accept-Language, Cookie
X-Frame-Options: SAMEORIGIN
Content-Type: application/json
Content-Language: en
Allow: GET, HEAD, OPTIONS

{
  "projects": "http://example.com/api/projects/",
  "components": "http://example.com/api/components/",
  "translations": "http://example.com/api/translations/",
  "languages": "http://example.com/api/languages/"
}
```

**Exemple CURL :**

```
curl \
-H "Authorization: Token TOKEN" \
https://example.com/api/
```

### Passing Parameters Examples

For the **POST** method the parameters can be specified either as form submission (*application/x-www-form-urlencoded*) or as JSON (*application/json*).

#### Form request example :

```
POST /api/projects/hello/repository/ HTTP/1.1
Host: example.com
Accept: application/json
Content-Type: application/x-www-form-urlencoded
Authorization: Token TOKEN

operation=pull
```

#### JSON request example :

```
POST /api/projects/hello/repository/ HTTP/1.1
Host: example.com
Accept: application/json
Content-Type: application/json
Authorization: Token TOKEN
Content-Length: 20

{"operation": "pull"}
```

#### Exemple CURL :

```
curl \
  -d operation=pull \
  -H "Authorization: Token TOKEN" \
  http://example.com/api/components/hello/weblate/repository/
```

#### CURL JSON example :

```
curl \
  --data-binary '{"operation": "pull"}' \
  -H "Content-Type: application/json" \
  -H "Authorization: Token TOKEN" \
  http://example.com/api/components/hello/weblate/repository/
```

### API rate limiting

The API requests are rate limited ; the default configuration limits it to 100 requests per day for anonymous users and 5000 requests per hour for authenticated users.

Rate limiting can be adjusted in the `settings.py`; see [Throttling in Django REST framework documentation](#) for more details how to configure it.

In the Docker container this can be configured using `WEBLATE_API_RATELIMIT_ANON` and `WEBLATE_API_RATELIMIT_USER`.

The status of rate limiting is reported in following headers :

X-RateLimit-Limit	Rate limiting limit of requests to perform
X-RateLimit-Remaining	Remaining limit of requests
X-RateLimit-Reset	Number of seconds until ratelimit window resets

Modifié dans la version 4.1 : Added ratelimiting status headers.

Voir aussi :

*Limite de requêtes*, *Limite de requêtes*, *WEBLATE\_API\_RATELIMIT\_ANON*, *WEBLATE\_API\_RATELIMIT\_USER*

## 1.12.2 API Entry Point

**GET /api/**

The API root entry point.

**Exemple de requête :**

```
GET /api/ HTTP/1.1
Host: example.com
Accept: application/json, text/javascript
Authorization: Token YOUR-TOKEN
```

**Exemple de réponse :**

```
HTTP/1.0 200 OK
Date: Fri, 25 Mar 2016 09:46:12 GMT
Server: WSGIServer/0.1 Python/2.7.11+
Vary: Accept, Accept-Language, Cookie
X-Frame-Options: SAMEORIGIN
Content-Type: application/json
Content-Language: en
Allow: GET, HEAD, OPTIONS

{
  "projects": "http://example.com/api/projects/",
  "components": "http://example.com/api/components/",
  "translations": "http://example.com/api/translations/",
  "languages": "http://example.com/api/languages/"
}
```

## 1.12.3 Utilisateurs

Nouveau dans la version 4.0.

**GET /api/users/**

Returns a list of users if you have permissions to see manage users. If not, then you get to see only your own details.

**Voir aussi :**

Users object attributes are documented at *GET /api/users/(str:username)/*.

**POST /api/users/**

Creates a new user.

**Paramètres**

- **username** (*string*) – Nom d'utilisateur
- **full\_name** (*string*) – User full name
- **email** (*string*) – Courriel utilisateur
- **is\_superuser** (*boolean*) – Is user superuser? (optional)
- **is\_active** (*boolean*) – Is user active? (optional)

**GET /api/users/(str: username) /**

Returns information about users.

**Paramètres**

- **username** (*string*) – Nom d'utilisateur de l'utilisateur

**Response JSON Object**

- **username** (*string*) – username of a user

- **full\_name** (*string*) – full name of a user
- **email** (*string*) – email of a user
- **is\_superuser** (*boolean*) – whether the user is a super user
- **is\_active** (*boolean*) – whether the user is active
- **date\_joined** (*string*) – date the user is created
- **groups** (*array*) – link to associated groups; see `GET /api/groups/(int:id)/`

Example JSON data :

```
{
  "email": "user@example.com",
  "full_name": "Example User",
  "username": "exampleusername",
  "groups": [
    "http://example.com/api/groups/2/",
    "http://example.com/api/groups/3/"
  ],
  "is_superuser": true,
  "is_active": true,
  "date_joined": "2020-03-29T18:42:42.617681Z",
  "url": "http://example.com/api/users/exampleusername/",
  "statistics_url": "http://example.com/api/users/exampleusername/statistics/"
}
```

**PUT** `/api/users/(str: username) /`

Changes the user parameters.

**Paramètres**

- **username** (*string*) – Nom d'utilisateur de l'utilisateur

**Response JSON Object**

- **username** (*string*) – username of a user
- **full\_name** (*string*) – full name of a user
- **email** (*string*) – email of a user
- **is\_superuser** (*boolean*) – whether the user is a super user
- **is\_active** (*boolean*) – whether the user is active
- **date\_joined** (*string*) – date the user is created

**PATCH** `/api/users/(str: username) /`

Changes the user parameters.

**Paramètres**

- **username** (*string*) – Nom d'utilisateur de l'utilisateur

**Response JSON Object**

- **username** (*string*) – username of a user
- **full\_name** (*string*) – full name of a user
- **email** (*string*) – email of a user
- **is\_superuser** (*boolean*) – whether the user is a super user
- **is\_active** (*boolean*) – whether the user is active
- **date\_joined** (*string*) – date the user is created

**DELETE** `/api/users/(str: username) /`

Deletes all user information and marks the user inactive.

**Paramètres**

- **username** (*string*) – Nom d'utilisateur de l'utilisateur

**POST** `/api/users/(str: username) /groups/`

Associate groups with a user.

**Paramètres**

- **username** (*string*) – Nom d'utilisateur de l'utilisateur

**Paramètres de formulaire**

- **string group\_id** – The unique group ID

**GET** /api/users/ (str: username) /statistics/

List statistics of a user.

**Paramètres**

- **username** (string) – Nom d'utilisateur de l'utilisateur

**Response JSON Object**

- **translated** (int) – Nombre de traductions par utilisateur
- **suggested** (int) – Nombre de suggestions par utilisateur
- **uploaded** (int) – Nombre de téléversements par utilisateur
- **commented** (int) – Nombre de commentaires par utilisateur
- **languages** (int) – Nombre de langues que l'utilisateur peut traduire

**GET** /api/users/ (str: username) /notifications/

List subscriptions of a user.

**Paramètres**

- **username** (string) – Nom d'utilisateur de l'utilisateur

**POST** /api/users/ (str: username) /notifications/

Associate subscriptions with a user.

**Paramètres**

- **username** (string) – Nom d'utilisateur de l'utilisateur

**Request JSON Object**

- **notification** (string) – Name of notification registered
- **scope** (int) – Scope of notification from the available choices
- **frequency** (int) – Frequency choices for notifications

**GET** /api/users/ (str: username) /notifications/

int: subscription\_id/ Get a subscription associated with a user.

**Paramètres**

- **username** (string) – Nom d'utilisateur de l'utilisateur
- **subscription\_id** (int) – ID de notification enregistré

**PUT** /api/users/ (str: username) /notifications/

int: subscription\_id/ Edit a subscription associated with a user.

**Paramètres**

- **username** (string) – Nom d'utilisateur de l'utilisateur
- **subscription\_id** (int) – ID de notification enregistré

**Request JSON Object**

- **notification** (string) – Name of notification registered
- **scope** (int) – Scope of notification from the available choices
- **frequency** (int) – Frequency choices for notifications

**PATCH** /api/users/ (str: username) /notifications/

int: subscription\_id/ Edit a subscription associated with a user.

**Paramètres**

- **username** (string) – Nom d'utilisateur de l'utilisateur
- **subscription\_id** (int) – ID de notification enregistré

**Request JSON Object**

- **notification** (string) – Name of notification registered
- **scope** (int) – Scope of notification from the available choices
- **frequency** (int) – Frequency choices for notifications

**DELETE** /api/users/ (str: username) /notifications/

int: subscription\_id/ Delete a subscription associated with a user.

**Paramètres**

- **username** (string) – Nom d'utilisateur de l'utilisateur
- **subscription\_id** – Name of notification registered
- **subscription\_id** – entier

## 1.12.4 Groupes

Nouveau dans la version 4.0.

### GET /api/groups/

Returns a list of groups if you have permissions to see manage groups. If not, then you get to see only the groups the user is a part of.

**Voir aussi :**

Group object attributes are documented at [GET /api/groups/\(int:id\)/](#).

### POST /api/groups/

Creates a new group.

#### Paramètres

- **name** (*string*) – Nom du groupe
- **project\_selection** (*int*) – Group of project selection from given options
- **language\_selection** (*int*) – Group of languages selected from given options

### GET /api/groups/(int: id) /

Returns information about group.

#### Paramètres

- **id** (*int*) – ID du groupe

#### Response JSON Object

- **name** (*string*) – name of a group
- **project\_selection** (*int*) – integer corresponding to group of projects
- **language\_selection** (*int*) – integer corresponding to group of languages
- **roles** (*array*) – link to associated roles; see [GET /api/roles/\(int:id\)/](#)
- **projects** (*array*) – link to associated projects; see [GET /api/projects/\(string:project\)/](#)
- **components** (*array*) – link to associated components; see [GET /api/components/\(string:project\)/\(string:component\)/](#)
- **componentlists** (*array*) – link to associated componentlist; see [GET /api/component-lists/\(str:slug\)/](#)
- **defining\_project** (*str*) – link to defining project, used for *Gestion du contrôle d'accès par projet*; see [GET /api/projects/\(string:project\)/](#)

**Example JSON data :**

```
{
  "name": "Guests",
  "project_selection": 3,
  "language_selection": 1,
  "url": "http://example.com/api/groups/1/",
  "roles": [
    "http://example.com/api/roles/1/",
    "http://example.com/api/roles/2/"
  ],
  "languages": [
    "http://example.com/api/languages/en/",
    "http://example.com/api/languages/cs/"
  ],
  "projects": [
    "http://example.com/api/projects/demo1/",
    "http://example.com/api/projects/demo/"
  ],
  "componentlist": "http://example.com/api/component-lists/new/",
  "components": [
    "http://example.com/api/components/demo/weblate/"
  ]
}
```

### PUT /api/groups/(int: id) /

Changes the group parameters.

**Paramètres**

- **id** (*int*) – ID du groupe

**Response JSON Object**

- **name** (*string*) – name of a group
- **project\_selection** (*int*) – integer corresponding to group of projects
- **language\_selection** (*int*) – integer corresponding to group of Languages

**PATCH** /api/groups/ (*int: id*) /

Changes the group parameters.

**Paramètres**

- **id** (*int*) – ID du groupe

**Response JSON Object**

- **name** (*string*) – name of a group
- **project\_selection** (*int*) – integer corresponding to group of projects
- **language\_selection** (*int*) – integer corresponding to group of languages

**DELETE** /api/groups/ (*int: id*) /

Deletes the group.

**Paramètres**

- **id** (*int*) – ID du groupe

**POST** /api/groups/ (*int: id*) /roles/

Associate roles with a group.

**Paramètres**

- **id** (*int*) – ID du groupe

**Paramètres de formulaire**

- **string role\_id** – The unique role ID

**POST** /api/groups/ (*int: id*) /components/

Associate components with a group.

**Paramètres**

- **id** (*int*) – ID du groupe

**Paramètres de formulaire**

- **string component\_id** – The unique component ID

**DELETE** /api/groups/ (*int: id*) /components/

**int: component\_id** Delete component from a group.

**Paramètres**

- **id** (*int*) – ID du groupe
- **component\_id** (*int*) – The unique component ID

**POST** /api/groups/ (*int: id*) /projects/

Associate projects with a group.

**Paramètres**

- **id** (*int*) – ID du groupe

**Paramètres de formulaire**

- **string project\_id** – The unique project ID

**DELETE** /api/groups/ (*int: id*) /projects/

**int: project\_id** Delete project from a group.

**Paramètres**

- **id** (*int*) – ID du groupe
- **project\_id** (*int*) – The unique project ID

**POST** /api/groups/ (*int: id*) /languages/

Associate languages with a group.

**Paramètres**

- **id** (*int*) – ID du groupe

**Paramètres de formulaire**

— **string language\_code** – The unique language code

**DELETE /api/groups/(int: id)/languages/**  
**string:** *language\_code* Delete language from a group.

**Paramètres**

— **id(int)** – ID du groupe

— **language\_code(string)** – The unique language code

**POST /api/groups/(int: id)/componentlists/**  
Associate componentlists with a group.

**Paramètres**

— **id(int)** – ID du groupe

**Paramètres de formulaire**

— **string component\_list\_id** – The unique componentlist ID

**DELETE /api/groups/(int: id)/componentlists/**  
**int:** *component\_list\_id* Delete componentlist from a group.

**Paramètres**

— **id(int)** – ID du groupe

— **component\_list\_id(int)** – The unique componentlist ID

## 1.12.5 Rôles

**GET /api/roles/**

Returns a list of all roles associated with user. If user is superuser, then list of all existing roles is returned.

**Voir aussi :**

Roles object attributes are documented at [GET /api/roles/\(int:id\)/](#).

**POST /api/roles/**

Creates a new role.

**Paramètres**

— **name(string)** – Nom du rôle

— **permissions(array)** – List of codenames of permissions

**GET /api/roles/(int: id)/**

Returns information about a role.

**Paramètres**

— **id(int)** – ID de rôle

**Response JSON Object**

— **name(string)** – Nom du rôle

— **permissions(array)** – list of codenames of permissions

**Example JSON data :**

```
{
  "name": "Access repository",
  "permissions": [
    "vcs.access",
    "vcs.view"
  ],
  "url": "http://example.com/api/roles/1/",
}
```

**PUT /api/roles/(int: id)/**

Changes the role parameters.

**Paramètres**

— **id(int)** – ID du rôle

**Response JSON Object**



- **name** (*string*) – Nom du rôle
- **permissions** (*array*) – list of codenames of permissions

**PATCH** `/api/roles/(int: id)/`

Changes the role parameters.

#### Paramètres

- **id** (*int*) – ID du rôle

#### Response JSON Object

- **name** (*string*) – Nom du rôle
- **permissions** (*array*) – list of codenames of permissions

**DELETE** `/api/roles/(int: id)/`

Deletes the role.

#### Paramètres

- **id** (*int*) – ID du rôle

## 1.12.6 Langues

**GET** `/api/languages/`

Returns a list of all languages.

#### Voir aussi :

Language object attributes are documented at [GET /api/languages/\(string: language\)/](#).

**POST** `/api/languages/`

Creates a new language.

#### Paramètres

- **code** (*string*) – Nom de la langue
- **name** (*string*) – Nom de la langue
- **direction** (*string*) – Orientation du texte
- **plural** (*object*) – Language plural formula and number

**GET** `/api/languages/(string: language)/`

Returns information about a language.

#### Paramètres

- **language** (*string*) – Code langue

#### Response JSON Object

- **code** (*string*) – Code langue
- **direction** (*string*) – Orientation du texte
- **plural** (*object*) – Object of language plural information
- **aliases** (*array*) – Array of aliases for language

#### Example JSON data :

```
{
  "code": "en",
  "direction": "ltr",
  "name": "English",
  "plural": {
    "id": 75,
    "source": 0,
    "number": 2,
    "formula": "n != 1",
    "type": 1
  },
  "aliases": [
    "english",
    "en_en",
    "base",
    "source",
  ]
}
```

(suite sur la page suivante)

```
    "eng"
  ],
  "url": "http://example.com/api/languages/en/",
  "web_url": "http://example.com/languages/en/",
  "statistics_url": "http://example.com/api/languages/en/statistics/"
}
```

**PUT** `/api/languages/(string: language) /`

Changes the language parameters.

**Paramètres**

- **language** (*string*) – Code de la langue

**Request JSON Object**

- **name** (*string*) – Nom de la langue
- **direction** (*string*) – Orientation du texte
- **plural** (*object*) – Language plural details

**PATCH** `/api/languages/(string: language) /`

Changes the language parameters.

**Paramètres**

- **language** (*string*) – Code de la langue

**Request JSON Object**

- **name** (*string*) – Nom de la langue
- **direction** (*string*) – Orientation du texte
- **plural** (*object*) – Language plural details

**DELETE** `/api/languages/(string: language) /`

Deletes the language.

**Paramètres**

- **language** (*string*) – Code de la langue

**GET** `/api/languages/(string: language) /statistics/`

Returns statistics for a language.

**Paramètres**

- **language** (*string*) – Code langue

**Response JSON Object**

- **total** (*int*) – total number of strings
- **total\_words** (*int*) – total number of words
- **last\_change** (*timestamp*) – last changes in the language
- **recent\_changes** (*int*) – total number of changes
- **translated** (*int*) – nombre de chaînes traduites
- **translated\_percent** (*float*) – pourcentage de chaînes traduites
- **translated\_words** (*int*) – number of translated words
- **translated\_words\_percent** (*int*) – percentage of translated words
- **translated\_chars** (*int*) – number of translated characters
- **translated\_chars\_percent** (*int*) – percentage of translated characters
- **total\_chars** (*int*) – number of total characters
- **fuzzy** (*int*) – nombre de chaînes à vérifier
- **fuzzy\_percent** (*int*) – percentage of fuzzy (marked for edit) strings
- **failing** (*int*) – number of failing strings
- **failing** – percentage of failing strings

## 1.12.7 Projets

**GET** `/api/projects/`

Returns a list of all projects.

**Voir aussi :**

Project object attributes are documented at `GET /api/projects/(string:project)/`.

**POST** `/api/projects/`

Nouveau dans la version 3.9.

Creates a new project.

### Paramètres

- **name** (*string*) – Nom du projet
- **slug** (*string*) – Identifiant du projet
- **web** (*string*) – Site Web du projet

**GET** `/api/projects/(string: project) /`

Returns information about a project.

### Paramètres

- **project** (*string*) – URL abrégée du projet

### Response JSON Object

- **name** (*string*) – Nom du projet
- **slug** (*string*) – Projet abrégé
- **web** (*string*) – Site Web du projet
- **components\_list\_url** (*string*) – URL to components list; see `GET /api/projects/(string:project)/components/`
- **repository\_url** (*string*) – URL to repository status; see `GET /api/projects/(string:project)/repository/`
- **changes\_list\_url** (*string*) – URL to changes list; see `GET /api/projects/(string:project)/changes/`
- **translation\_review** (*boolean*) – *Activer les révisions*
- **source\_review** (*boolean*) – *Activer la révision des chaînes sources*
- **set\_language\_team** (*boolean*) – *Définir l'en-tête « Language-Team »*
- **enable\_hooks** (*boolean*) – *Activer les points d'ancrage*
- **instructions** (*string*) – *Directives de traduction*
- **language\_aliases** (*string*) – *Alias de langue*

**Example JSON data :**

```
{
  "name": "Hello",
  "slug": "hello",
  "url": "http://example.com/api/projects/hello/",
  "web": "https://weblate.org/",
  "web_url": "http://example.com/projects/hello/"
}
```

**PATCH** `/api/projects/(string: project) /`

Nouveau dans la version 4.3.

Edit a project by a **PATCH** request.

### Paramètres

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant

**PUT** `/api/projects/(string: project) /`

Nouveau dans la version 4.3.

Edit a project by a **PUT** request.

### Paramètres

- **project** (*string*) – URL abrégée du projet

**DELETE** `/api/projects/(string: project) /`

Nouveau dans la version 3.9.

Deletes a project.

**Paramètres**

— **project** (*string*) – URL abrégée du projet

**GET** `/api/projects/(string: project) /changes/`

Returns a list of project changes. This is essentially a project scoped `GET /api/changes/` accepting same params.

**Paramètres**

— **project** (*string*) – URL abrégée du projet

**Response JSON Object**

— **results** (*array*) – array of component objects; see `GET /api/changes/(int:id)/`

**GET** `/api/projects/(string: project) /repository/`

Returns information about VCS repository status. This endpoint contains only an overall summary for all repositories for the project. To get more detailed status use `GET /api/components/(string:project)/(string:component)/repository/`.

**Paramètres**

— **project** (*string*) – URL abrégée du projet

**Response JSON Object**

— **needs\_commit** (*boolean*) – whether there are any pending changes to commit

— **needs\_merge** (*boolean*) – whether there are any upstream changes to merge

— **needs\_push** (*boolean*) – whether there are any local changes to push

**Example JSON data :**

```
{
  "needs_commit": true,
  "needs_merge": false,
  "needs_push": true
}
```

**POST** `/api/projects/(string: project) /repository/`

Performs given operation on the VCS repository.

**Paramètres**

— **project** (*string*) – URL abrégée du projet

**Request JSON Object**

— **operation** (*string*) – Operation to perform : one of push, pull, commit, reset, cleanup, file-sync

**Response JSON Object**

— **result** (*boolean*) – result of the operation

**Exemple CURL :**

```
curl \
  -d operation=pull \
  -H "Authorization: Token TOKEN" \
  http://example.com/api/projects/hello/repository/
```

**JSON request example :**

```
POST /api/projects/hello/repository/ HTTP/1.1
Host: example.com
Accept: application/json
Content-Type: application/json
Authorization: Token TOKEN
Content-Length: 20

{"operation": "pull"}
```

**JSON response example :**

```

HTTP/1.0 200 OK
Date: Tue, 12 Apr 2016 09:32:50 GMT
Server: WSGIServer/0.1 Python/2.7.11+
Vary: Accept, Accept-Language, Cookie
X-Frame-Options: SAMEORIGIN
Content-Type: application/json
Content-Language: en
Allow: GET, POST, HEAD, OPTIONS

{"result":true}

```

**GET** `/api/projects/(string: project)/components/`

Returns a list of translation components in the given project.

**Paramètres**

— **project** (*string*) – URL abrégée du projet

**Response JSON Object**

— **results** (*array*) – array of component objects; see `GET /api/components/(string:project)/(string:component)/`

**POST** `/api/projects/(string: project)/components/`

Nouveau dans la version 3.9.

Modifié dans la version 4.3 : The `zipfile` and `docfile` parameters are now accepted for VCS-less components, see [Local files](#).

Modifié dans la version 4.6 : The cloned repositories are now automatically shared within a project using [Weblate internal URLs](#). Use `disable_autoshare` to turn off this.

Creates translation components in the given project.

---

**Indication :** Use [Weblate internal URLs](#) when creating multiple components from a single VCS repository.

---



---

**Note :** Most of the component creation happens in the background. Check the `task_url` attribute of created component and follow the progress there.

---

**Paramètres**

— **project** (*string*) – URL abrégée du projet

**Paramètres de formulaire**

— **file zipfile** – ZIP file to upload into Weblate for translations initialization

— **file docfile** – Document à traduire

— **boolean disable\_autoshare** – Disables automatic repository sharing via [Weblate internal URLs](#).

**Request JSON Object**

— **object** – Component parameters, see `GET /api/components/(string:project)/(string:component)/`

**Response JSON Object**

— **result** (*object*) – Created component object; see `GET /api/components/(string:project)/(string:component)/`

JSON can not be used when uploading the files using the `zipfile` and `docfile` parameters. The data has to be uploaded as `multipart/form-data`.

**CURL form request example :**

```

curl \
  --form docfile=@strings.html \
  --form name=Weblate \
  --form slug=weblate \

```

(suite sur la page suivante)

(suite de la page précédente)

```
--form file_format=html \  
--form new_lang=add \  
-H "Authorization: Token TOKEN" \  
http://example.com/api/projects/hello/components/
```

**CURL JSON request example :**

```
curl \  
  --data-binary '{  
    "branch": "main",  
    "file_format": "po",  
    "filemask": "po/*.po",  
    "name": "Weblate",  
    "slug": "weblate",  
    "repo": "https://github.com/WeblateOrg/hello.git",  
    "template": "",  
    "new_base": "po/hello.pot",  
    "vcs": "git"  
  }' \  
  -H "Content-Type: application/json" \  
  -H "Authorization: Token TOKEN" \  
  http://example.com/api/projects/hello/components/
```

**JSON request to create a new component from Git :**

```
POST /api/projects/hello/components/ HTTP/1.1  
Host: example.com  
Accept: application/json  
Content-Type: application/json  
Authorization: Token TOKEN  
Content-Length: 20  
  
{  
  "branch": "main",  
  "file_format": "po",  
  "filemask": "po/*.po",  
  "name": "Weblate",  
  "slug": "weblate",  
  "repo": "https://github.com/WeblateOrg/hello.git",  
  "template": "",  
  "new_base": "po/hello.pot",  
  "vcs": "git"  
}
```

**JSON request to create a new component from another one :**

```
POST /api/projects/hello/components/ HTTP/1.1  
Host: example.com  
Accept: application/json  
Content-Type: application/json  
Authorization: Token TOKEN  
Content-Length: 20  
  
{  
  "file_format": "po",  
  "filemask": "po/*.po",  
  "name": "Weblate",  
  "slug": "weblate",  
  "repo": "weblate://weblate/hello",  
  "template": "",  
  "new_base": "po/hello.pot",  
  "vcs": "git"  
}
```

**JSON response example :**

```

HTTP/1.0 200 OK
Date: Tue, 12 Apr 2016 09:32:50 GMT
Server: WSGIServer/0.1 Python/2.7.11+
Vary: Accept, Accept-Language, Cookie
X-Frame-Options: SAMEORIGIN
Content-Type: application/json
Content-Language: en
Allow: GET, POST, HEAD, OPTIONS

{
  "branch": "main",
  "file_format": "po",
  "filemask": "po/*.po",
  "git_export": "",
  "license": "",
  "license_url": "",
  "name": "Weblate",
  "slug": "weblate",
  "project": {
    "name": "Hello",
    "slug": "hello",
    "source_language": {
      "code": "en",
      "direction": "ltr",
      "name": "English",
      "url": "http://example.com/api/languages/en/",
      "web_url": "http://example.com/languages/en/"
    },
    "url": "http://example.com/api/projects/hello/",
    "web": "https://weblate.org/",
    "web_url": "http://example.com/projects/hello/"
  },
  "repo": "file:///home/nijel/work/weblate-hello",
  "template": "",
  "new_base": "",
  "url": "http://example.com/api/components/hello/weblate/",
  "vcs": "git",
  "web_url": "http://example.com/projects/hello/weblate/"
}

```

**GET /api/projects/(string: project)/languages/**  
Returns paginated statistics for all languages within a project.

Nouveau dans la version 3.8.

**Paramètres**

- **project** (*string*) – URL abrégée du projet

**Response JSON Object**

- **results** (*array*) – array of translation statistics objects
- **language** (*string*) – Nom de la langue
- **code** (*string*) – Code de la langue
- **total** (*int*) – total number of strings
- **translated** (*int*) – nombre de chaînes traduites
- **translated\_percent** (*float*) – pourcentage de chaînes traduites
- **total\_words** (*int*) – total number of words
- **translated\_words** (*int*) – number of translated words
- **words\_percent** (*float*) – percentage of translated words

**GET /api/projects/(string: project)/statistics/**  
Returns statistics for a project.

Nouveau dans la version 3.8.

**Paramètres**

- **project** (*string*) – URL abrégée du projet

**Response JSON Object**

- **total** (*int*) – total number of strings
- **translated** (*int*) – nombre de chaînes traduites
- **translated\_percent** (*float*) – pourcentage de chaînes traduites
- **total\_words** (*int*) – total number of words
- **translated\_words** (*int*) – number of translated words
- **words\_percent** (*float*) – percentage of translated words

## 1.12.8 Composants

---

**Indication :** Use `POST /api/projects/(string:project)/components/` to create new components.

---

**GET /api/components/**

Returns a list of translation components.

**Voir aussi :**

Component object attributes are documented at `GET /api/components/(string:project)/(string:component)/`.

**GET /api/components/(string: project) /**

**string:** *component* / Returns information about translation component.

**Paramètres**

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant

**Response JSON Object**

- **project** (*object*) – the translation project; see `GET /api/projects/(string:project)/`
- **name** (*string*) – *Nom du composant*
- **slug** (*string*) – *Identifiant du composant*
- **vcs** (*string*) – *Système de contrôle de version*
- **repo** (*string*) – *Dépôt du code source*
- **git\_export** (*string*) – *URL de dépôt exportée*
- **branch** (*string*) – *Branche du dépôt*
- **push\_branch** (*string*) – *Pousser la branche*
- **filemask** (*string*) – *Masque de fichier*
- **template** (*string*) – *Fichier de langue de base mono-langue*
- **edit\_template** (*string*) – *Modifier le fichier de base*
- **intermediate** (*string*) – *Fichier de langue intermédiaire*
- **new\_base** (*string*) – *Modèle pour les nouvelles traductions*
- **file\_format** (*string*) – *Format de fichier*
- **license** (*string*) – *Licence associée à cette traduction*
- **agreement** (*string*) – *Accord de contribution*
- **new\_lang** (*string*) – *Ajouter une nouvelle traduction*
- **language\_code\_style** (*string*) – *Style de code-langue*
- **source\_language** (*object*) – source language object; see `GET /api/languages/(string:language)/`
- **push** (*string*) – *URL pour l'envoi du dépôt*
- **check\_flags** (*string*) – *Drapeaux de traduction*
- **priority** (*string*) – *Priorité*
- **enforced\_checks** (*string*) – *Vérifications forcées*
- **restricted** (*string*) – *Accès restreint*
- **repoweb** (*string*) – *Explorateur de dépôt*
- **report\_source\_bugs** (*string*) – *Adresse pour signaler une anomalie de chaîne source*



- **merge\_style** (*string*) – *Style de fusion*
- **commit\_message** (*string*) – *Commit, add, delete, merge and add-on messages*
- **add\_message** (*string*) – *Commit, add, delete, merge and add-on messages*
- **delete\_message** (*string*) – *Commit, add, delete, merge and add-on messages*
- **merge\_message** (*string*) – *Commit, add, delete, merge and add-on messages*
- **addon\_message** (*string*) – *Commit, add, delete, merge and add-on messages*
- **allow\_translation\_propagation** (*string*) – *Permettre la propagation de la traduction*
- **enable\_suggestions** (*string*) – *Autoriser les suggestions*
- **suggestion\_voting** (*string*) – *Vote pour la suggestion*
- **suggestion\_autoaccept** (*string*) – *Accepter automatiquement les suggestions*
- **push\_on\_commit** (*string*) – *Pousser lors de l'archivage*
- **commit\_pending\_age** (*string*) – *Âge des modifications à archiver*
- **auto\_lock\_error** (*string*) – *Verrouiller en cas d'erreur*
- **language\_regex** (*string*) – *Filtre sur la langue*
- **variant\_regex** (*string*) – *Expression rationnelle des variantes*
- **repository\_url** (*string*) – URL to repository status; see `GET /api/components/(string:project)/(string:component)/repository/`
- **translations\_url** (*string*) – URL to translations list; see `GET /api/components/(string:project)/(string:component)/translations/`
- **lock\_url** (*string*) – URL to lock status; see `GET /api/components/(string:project)/(string:component)/lock/`
- **changes\_list\_url** (*string*) – URL to changes list; see `GET /api/components/(string:project)/(string:component)/changes/`
- **task\_url** (*string*) – URL to a background task (if any); see `GET /api/tasks/(str:uuid)/`

Example JSON data :

```
{
  "branch": "main",
  "file_format": "po",
  "filemask": "po/*.po",
  "git_export": "",
  "license": "",
  "license_url": "",
  "name": "Weblate",
  "slug": "weblate",
  "project": {
    "name": "Hello",
    "slug": "hello",
    "source_language": {
      "code": "en",
      "direction": "ltr",
      "name": "English",
      "url": "http://example.com/api/languages/en/",
      "web_url": "http://example.com/languages/en/"
    },
    "url": "http://example.com/api/projects/hello/",
    "web": "https://weblate.org/",
    "web_url": "http://example.com/projects/hello/"
  },
  "source_language": {
    "code": "en",
    "direction": "ltr",
    "name": "English",
    "url": "http://example.com/api/languages/en/",
    "web_url": "http://example.com/languages/en/"
  },
  "repo": "file:///home/nijel/work/weblate-hello",
```

(suite sur la page suivante)

(suite de la page précédente)

```

"template": "",
"new_base": "",
"url": "http://example.com/api/components/hello/weblate/",
"vcs": "git",
"web_url": "http://example.com/projects/hello/weblate/"
}

```

**PATCH** `/api/components/(string: project) /`  
**string:** `component` / Edit a component by a **PATCH** request.

**Paramètres**

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant
- **source\_language** (*string*) – Project source language code (optional)

**Request JSON Object**

- **name** (*string*) – name of component
- **slug** (*string*) – slug of component
- **repo** (*string*) – VCS repository URL

**Exemple CURL :**

```

curl \
  --data-binary '{"name": "new name"}' \
  -H "Content-Type: application/json" \
  -H "Authorization: Token TOKEN" \
  PATCH http://example.com/api/projects/hello/components/

```

**JSON request example :**

```

PATCH /api/projects/hello/components/ HTTP/1.1
Host: example.com
Accept: application/json
Content-Type: application/json
Authorization: Token TOKEN
Content-Length: 20

{
  "name": "new name"
}

```

**JSON response example :**

```

HTTP/1.0 200 OK
Date: Tue, 12 Apr 2016 09:32:50 GMT
Server: WSGIServer/0.1 Python/2.7.11+
Vary: Accept, Accept-Language, Cookie
X-Frame-Options: SAMEORIGIN
Content-Type: application/json
Content-Language: en
Allow: GET, POST, HEAD, OPTIONS

{
  "branch": "main",
  "file_format": "po",
  "filemask": "po/*.po",
  "git_export": "",
  "license": "",
  "license_url": "",
  "name": "new name",
  "slug": "weblate",
  "project": {
    "name": "Hello",

```

(suite sur la page suivante)

(suite de la page précédente)

```

    "slug": "hello",
    "source_language": {
      "code": "en",
      "direction": "ltr",
      "name": "English",
      "url": "http://example.com/api/languages/en/",
      "web_url": "http://example.com/languages/en/"
    },
    "url": "http://example.com/api/projects/hello/",
    "web": "https://weblate.org/",
    "web_url": "http://example.com/projects/hello/"
  },
  "repo": "file:///home/nijel/work/weblate-hello",
  "template": "",
  "new_base": "",
  "url": "http://example.com/api/components/hello/weblate/",
  "vcs": "git",
  "web_url": "http://example.com/projects/hello/weblate/"
}

```

**PUT** `/api/components/(string: project) /`  
**string:** *component* / Edit a component by a **PUT** request.

#### Paramètres

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant

#### Request JSON Object

- **branch** (*string*) – VCS repository branch
- **file\_format** (*string*) – file format of translations
- **filemask** (*string*) – mask of translation files in the repository
- **name** (*string*) – name of component
- **slug** (*string*) – slug of component
- **repo** (*string*) – VCS repository URL
- **template** (*string*) – base file for monolingual translations
- **new\_base** (*string*) – base file for adding new translations
- **vcs** (*string*) – système de contrôle des versions

**DELETE** `/api/components/(string: project) /`  
**string:** *component* / Nouveau dans la version 3.9.

Deletes a component.

#### Paramètres

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant

**GET** `/api/components/(string: project) /`  
**string:** *component/changes/* Returns a list of component changes. This is essentially a component scoped **GET** `/api/changes/` accepting same params.

#### Paramètres

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant

#### Response JSON Object

- **results** (*array*) – array of component objects; see **GET** `/api/changes/(int:id) /`

**GET** `/api/components/(string: project) /`  
**string:** *component/file/* Nouveau dans la version 4.9.

Downloads all available translations associated with the component as an archive file using the requested format.

#### Paramètres

- **project** (*string*) – URL abrégée du projet

— **component** (*string*) – URL abrégée du composant

**Paramètres de requête**

- **format** (*string*) – The archive format to use; If not specified, defaults to zip; Supported formats : zip
- **q** (*string*) – Filter downloaded strings, see search.

**GET** /api/components/(**string**: *project*) /

**string**: *component/screenshots/* Returns a list of component screenshots.

**Paramètres**

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant

**Response JSON Object**

- **results** (*array*) – array of component screenshots; see `GET /api/screenshots/(int:id)/`

**GET** /api/components/(**string**: *project*) /

**string**: *component/lock/* Returns component lock status.

**Paramètres**

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant

**Response JSON Object**

- **locked** (*boolean*) – whether component is locked for updates

**Example JSON data :**

```
{
  "locked": false
}
```

**POST** /api/components/(**string**: *project*) /

**string**: *component/lock/* Sets component lock status.

Response is same as `GET /api/components/(string:project)/(string:component)/lock/`.

**Paramètres**

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant

**Request JSON Object**

- **lock** – Boolean whether to lock or not.

**Exemple CURL :**

```
curl \
-d lock=true \
-H "Authorization: Token TOKEN" \
http://example.com/api/components/hello/weblate/repository/
```

**JSON request example :**

```
POST /api/components/hello/weblate/repository/ HTTP/1.1
Host: example.com
Accept: application/json
Content-Type: application/json
Authorization: Token TOKEN
Content-Length: 20

{"lock": true}
```

**JSON response example :**

```

HTTP/1.0 200 OK
Date: Tue, 12 Apr 2016 09:32:50 GMT
Server: WSGIServer/0.1 Python/2.7.11+
Vary: Accept, Accept-Language, Cookie
X-Frame-Options: SAMEORIGIN
Content-Type: application/json
Content-Language: en
Allow: GET, POST, HEAD, OPTIONS

{"locked":true}

```

**GET** `/api/components/(string: project) /`  
**string:** `component/repository/` Returns information about VCS repository status.  
 The response is same as for `GET /api/projects/(string:project)/repository/`.

#### Paramètres

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant

#### Response JSON Object

- **needs\_commit** (*boolean*) – whether there are any pending changes to commit
- **needs\_merge** (*boolean*) – whether there are any upstream changes to merge
- **needs\_push** (*boolean*) – whether there are any local changes to push
- **remote\_commit** (*string*) – Remote commit information
- **status** (*string*) – VCS repository status as reported by VCS
- **merge\_failure** – Text describing merge failure or null if there is none

**POST** `/api/components/(string: project) /`  
**string:** `component/repository/` Performs the given operation on a VCS repository.  
 See `POST /api/projects/(string:project)/repository/` for documentation.

#### Paramètres

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant

#### Request JSON Object

- **operation** (*string*) – Operation to perform : one of push, pull, commit, reset, cleanup

#### Response JSON Object

- **result** (*boolean*) – result of the operation

#### Exemple CURL :

```

curl \
  -d operation=pull \
  -H "Authorization: Token TOKEN" \
  http://example.com/api/components/hello/weblate/repository/

```

#### JSON request example :

```

POST /api/components/hello/weblate/repository/ HTTP/1.1
Host: example.com
Accept: application/json
Content-Type: application/json
Authorization: Token TOKEN
Content-Length: 20

{"operation":"pull"}

```

#### JSON response example :

```

HTTP/1.0 200 OK
Date: Tue, 12 Apr 2016 09:32:50 GMT
Server: WSGIServer/0.1 Python/2.7.11+

```

(suite sur la page suivante)

(suite de la page précédente)

```
Vary: Accept, Accept-Language, Cookie
X-Frame-Options: SAMEORIGIN
Content-Type: application/json
Content-Language: en
Allow: GET, POST, HEAD, OPTIONS

{"result":true}
```

**GET** `/api/components/(string: project) /`  
**string:** `component/monolingual_base/` Downloads base file for monolingual translations.

**Paramètres**

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant

**GET** `/api/components/(string: project) /`  
**string:** `component/new_template/` Downloads template file for new translations.

**Paramètres**

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant

**GET** `/api/components/(string: project) /`  
**string:** `component/translations/` Returns a list of translation objects in the given component.

**Paramètres**

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant

**Response JSON Object**

- **results** (*array*) – array of translation objects; see `GET /api/translations/(string:project)/(string:component)/(string:language)/`

**POST** `/api/components/(string: project) /`  
**string:** `component/translations/` Creates new translation in the given component.

**Paramètres**

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant

**Request JSON Object**

- **language\_code** (*string*) – translation language code; see `GET /api/languages/(string:language)/`

**Response JSON Object**

- **result** (*object*) – new translation object created

**Exemple CURL :**

```
curl \
  -d language_code=cs \
  -H "Authorization: Token TOKEN" \
  http://example.com/api/projects/hello/components/
```

**JSON request example :**

```
POST /api/projects/hello/components/ HTTP/1.1
Host: example.com
Accept: application/json
Content-Type: application/json
Authorization: Token TOKEN
Content-Length: 20

{"language_code": "cs"}
```

**JSON response example :**

```

HTTP/1.0 200 OK
Date: Tue, 12 Apr 2016 09:32:50 GMT
Server: WSGIServer/0.1 Python/2.7.11+
Vary: Accept, Accept-Language, Cookie
X-Frame-Options: SAMEORIGIN
Content-Type: application/json
Content-Language: en
Allow: GET, POST, HEAD, OPTIONS

{
  "failing_checks": 0,
  "failing_checks_percent": 0,
  "failing_checks_words": 0,
  "filename": "po/cs.po",
  "fuzzy": 0,
  "fuzzy_percent": 0.0,
  "fuzzy_words": 0,
  "have_comment": 0,
  "have_suggestion": 0,
  "is_template": false,
  "is_source": false,
  "language": {
    "code": "cs",
    "direction": "ltr",
    "name": "Czech",
    "url": "http://example.com/api/languages/cs/",
    "web_url": "http://example.com/languages/cs/"
  },
  "language_code": "cs",
  "id": 125,
  "last_author": null,
  "last_change": null,
  "share_url": "http://example.com/engage/hello/cs/",
  "total": 4,
  "total_words": 15,
  "translate_url": "http://example.com/translate/hello/weblate/cs/",
  "translated": 0,
  "translated_percent": 0.0,
  "translated_words": 0,
  "url": "http://example.com/api/translations/hello/weblate/cs/",
  "web_url": "http://example.com/projects/hello/weblate/cs/"
}

```

**GET** `/api/components/(string: project) /`  
**string:** `component/statistics/` Returns paginated statistics for all translations within component.  
 Nouveau dans la version 2.7.

#### Paramètres

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant

#### Response JSON Object

- **results** (*array*) – array of translation statistics objects; see `GET /api/translations/(string:project)/(string:component)/(string:language)/statistics/`

**GET** `/api/components/(string: project) /`  
**string:** `component/links/` Retourne les projets liés à un composant.  
 Nouveau dans la version 4.5.

#### Paramètres

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant

#### Response JSON Object

— **projects** (*array*) – associated projects; see `GET /api/projects/(string:project)/`

**POST /api/components/(string: project) /**

**string:** *component/links/* Associe un projet à un composant.

Nouveau dans la version 4.5.

#### Paramètres

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant

#### Paramètres de formulaire

- **string project\_slug** – Identifiant du projet

**DELETE /api/components/(string: project) /**

**string:** *component/links/string: project\_slug/* Remove association of a project with a component.

Nouveau dans la version 4.5.

#### Paramètres

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant
- **project\_slug** (*string*) – L'identifiant du projet à supprimer

## 1.12.9 Traductions

**GET /api/translations/**

Returns a list of translations.

#### Voir aussi :

Translation object attributes are documented at `GET /api/translations/(string:project)/(string:component)/(string:language)/`.

**GET /api/translations/(string: project) /**

**string:** *component/string: language/* Returns information about a translation.

#### Paramètres

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant
- **language** (*string*) – Translation language code

#### Response JSON Object

- **component** (*object*) – component object; see `GET /api/components/(string:project)/(string:component)/`
- **failing\_checks** (*int*) – nombre de chaînes qui échouent aux contrôles
- **failing\_checks\_percent** (*float*) – pourcentage de chaînes qui échouent aux contrôles
- **failing\_checks\_words** (*int*) – nombre de mots avec des contrôles échoués
- **filename** (*string*) – Nom du fichier de traduction
- **fuzzy** (*int*) – nombre de chaînes à vérifier
- **fuzzy\_percent** (*float*) – percentage of fuzzy (marked for edit) strings
- **fuzzy\_words** (*int*) – number of words in fuzzy (marked for edit) strings
- **have\_comment** (*int*) – number of strings with comment
- **have\_suggestion** (*int*) – number of strings with suggestion
- **is\_template** (*boolean*) – si la traduction a une base mono-langue
- **language** (*object*) – source language object; see `GET /api/languages/(string:language)/`
- **language\_code** (*string*) – language code used in the repository; this can be different from language code in the language object
- **last\_author** (*string*) – name of last author
- **last\_change** (*timestamp*) – last change timestamp
- **revision** (*string*) – revision hash for the file
- **share\_url** (*string*) – URL for sharing leading to engagement page
- **total** (*int*) – total number of strings



- **total\_words** (*int*) – total number of words
- **translate\_url** (*string*) – URL for translating
- **translated** (*int*) – nombre de chaînes traduites
- **translated\_percent** (*float*) – pourcentage de chaînes traduites
- **translated\_words** (*int*) – number of translated words
- **repository\_url** (*string*) – URL to repository status; see `GET /api/translations/(string:project)/(string:component)/(string:language)/repository/`
- **file\_url** (*string*) – URL to file object; see `GET /api/translations/(string:project)/(string:component)/(string:language)/file/`
- **changes\_list\_url** (*string*) – URL to changes list; see `GET /api/translations/(string:project)/(string:component)/(string:language)/changes/`
- **units\_list\_url** (*string*) – URL to strings list; see `GET /api/translations/(string:project)/(string:component)/(string:language)/units/`

Example JSON data :

```
{
  "component": {
    "branch": "main",
    "file_format": "po",
    "filemask": "po/*.po",
    "git_export": "",
    "license": "",
    "license_url": "",
    "name": "Weblate",
    "new_base": "",
    "project": {
      "name": "Hello",
      "slug": "hello",
      "source_language": {
        "code": "en",
        "direction": "ltr",
        "name": "English",
        "url": "http://example.com/api/languages/en/",
        "web_url": "http://example.com/languages/en/"
      },
      "url": "http://example.com/api/projects/hello/",
      "web": "https://weblate.org/",
      "web_url": "http://example.com/projects/hello/"
    },
    "repo": "file:///home/nijel/work/weblate-hello",
    "slug": "weblate",
    "template": "",
    "url": "http://example.com/api/components/hello/weblate/",
    "vcs": "git",
    "web_url": "http://example.com/projects/hello/weblate/"
  },
  "failing_checks": 3,
  "failing_checks_percent": 75.0,
  "failing_checks_words": 11,
  "filename": "po/cs.po",
  "fuzzy": 0,
  "fuzzy_percent": 0.0,
  "fuzzy_words": 0,
  "have_comment": 0,
  "have_suggestion": 0,
  "is_template": false,
  "language": {
```

(suite sur la page suivante)

```

    "code": "cs",
    "direction": "ltr",
    "name": "Czech",
    "url": "http://example.com/api/languages/cs/",
    "web_url": "http://example.com/languages/cs/"
  },
  "language_code": "cs",
  "last_author": "Weblate Admin",
  "last_change": "2016-03-07T10:20:05.499",
  "revision": "7ddfafe6daaf57fc8654cc852ea6be212b015792",
  "share_url": "http://example.com/engage/hello/cs/",
  "total": 4,
  "total_words": 15,
  "translate_url": "http://example.com/translate/hello/weblate/cs/",
  "translated": 4,
  "translated_percent": 100.0,
  "translated_words": 15,
  "url": "http://example.com/api/translations/hello/weblate/cs/",
  "web_url": "http://example.com/projects/hello/weblate/cs/"
}

```

**DELETE /api/translations/ (string: project) /**  
**string: component/string: language/** Nouveau dans la version 3.9.  
 Deletes a translation.

#### Paramètres

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant
- **language** (*string*) – Translation language code

**GET /api/translations/ (string: project) /**  
**string: component/string: language/changes/** Returns a list of translation changes. This is essentially a translations-scoped **GET /api/changes/** accepting the same parameters.

#### Paramètres

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant
- **language** (*string*) – Translation language code

#### Response JSON Object

- **results** (*array*) – array of component objects; see **GET /api/changes/ (int:id) /**

**GET /api/translations/ (string: project) /**  
**string: component/string: language/units/** Returns a list of translation units.

#### Paramètres

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant
- **language** (*string*) – Translation language code
- **q** (*string*) – Search query string *Recherche* (optional)

#### Response JSON Object

- **results** (*array*) – array of component objects; see **GET /api/units/ (int:id) /**

**POST /api/translations/ (string: project) /**  
**string: component/string: language/units/** Add new monolingual unit.

#### Paramètres

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant
- **language** (*string*) – Translation language code

#### Request JSON Object

- **key** (*string*) – Name of translation unit
- **value** (*array*) – The translation unit value

Voir aussi :

*Gérer les chaînes*, *adding-new-strings*

**POST** /api/translations/(**string**: *project*) /

**string**: *component*/**string**: *language*/**autotranslate**/ Trigger automatic translation.

#### Paramètres

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant
- **language** (*string*) – Translation language code

#### Request JSON Object

- **mode** (*string*) – Mode de traduction automatique
- **filter\_type** (*string*) – Automatic translation filter type
- **auto\_source** (*string*) – Automatic translation source - mt or others
- **component** (*string*) – Activez la contribution au mémoire de traduction partagé du projet afin d'avoir accès aux composants supplémentaires.
- **engines** (*array*) – Moteurs de traduction automatisée
- **threshold** (*string*) – Seuil de score

**GET** /api/translations/(**string**: *project*) /

**string**: *component*/**string**: *language*/**file**/ Download current translation file as it is stored in the VCS (without the *format* parameter) or converted to another format (see [Downloading translations](#)).

---

**Note :** This API endpoint uses different logic for output than rest of API as it operates on whole file rather than on data. Set of accepted *format* parameter differs and without such parameter you get translation file as stored in VCS.

---

#### Paramètres de requête

- **format** – File format to use ; if not specified no format conversion happens ; supported file formats : po, mo, xiff, xiff11, tbx, csv, xlsx, json, aresource, strings

#### Paramètres

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant
- **language** (*string*) – Translation language code

**POST** /api/translations/(**string**: *project*) /

**string**: *component*/**string**: *language*/**file**/ Upload new file with translations.

#### Paramètres

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant
- **language** (*string*) – Translation language code

#### Paramètres de formulaire

- **string conflict** – How to deal with conflicts (ignore, replace-translated or replace-approved)
- **file file** – Fichier téléversé
- **string email** – Adresse courriel de l'auteur
- **string author** – Nom de l'auteur
- **string method** – Upload method (translate, approve, suggest, fuzzy, replace, source, add), see [Import methods](#)
- **string fuzzy** – Fuzzy (marked for edit) strings processing (*empty*, *process*, *approve*)

**Exemple CURL :**

```
curl -X POST \
-F file=@strings.xml \
-H "Authorization: Token TOKEN" \
http://example.com/api/translations/hello/android/cs/file/
```

**GET** `/api/translations/(string: project) /`  
**string:** `component/string: language/repository/` Returns information about VCS repository status.

The response is same as for `GET /api/components/(string:project)/(string:component)/repository/`.

**Paramètres**

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant
- **language** (*string*) – Translation language code

**POST** `/api/translations/(string: project) /`  
**string:** `component/string: language/repository/` Performs given operation on the VCS repository.

See `POST /api/projects/(string:project)/repository/` for documentation.

**Paramètres**

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant
- **language** (*string*) – Translation language code

**Request JSON Object**

- **operation** (*string*) – Operation to perform : one of push, pull, commit, reset, cleanup

**Response JSON Object**

- **result** (*boolean*) – result of the operation

**GET** `/api/translations/(string: project) /`  
**string:** `component/string: language/statistics/` Returns detailed translation statistics.  
Nouveau dans la version 2.7.

**Paramètres**

- **project** (*string*) – URL abrégée du projet
- **component** (*string*) – URL abrégée du composant
- **language** (*string*) – Translation language code

**Response JSON Object**

- **code** (*string*) – Code de la langue
- **failing** (*int*) – number of failing checks
- **failing\_percent** (*float*) – percentage of failing checks
- **fuzzy** (*int*) – nombre de chaînes à vérifier
- **fuzzy\_percent** (*float*) – percentage of fuzzy (marked for edit) strings
- **total\_words** (*int*) – total number of words
- **translated\_words** (*int*) – number of translated words
- **last\_author** (*string*) – name of last author
- **last\_change** (*timestamp*) – date of last change
- **name** (*string*) – Nom de la langue
- **total** (*int*) – total number of strings
- **translated** (*int*) – nombre de chaînes traduites
- **translated\_percent** (*float*) – pourcentage de chaînes traduites
- **url** (*string*) – URL to access the translation (engagement URL)
- **url\_translate** (*string*) – URL to access the translation (real translation URL)

## 1.12.10 Unités

A *unit* is a single piece of a translation which pairs a source string with a corresponding translated string and also contains some related metadata. The term is derived from the [Translate Toolkit](#) and XLIFF.

Nouveau dans la version 2.10.

**GET** `/api/units/`

Returns list of translation units.

**Voir aussi :**

Unit object attributes are documented at `GET /api/units/(int:id)/`.

**GET** `/api/units/(int: id) /`

Modifié dans la version 4.3 : The `target` and `source` are now arrays to properly handle plural strings.

Returns information about translation unit.

### Paramètres

- `id(int)` – ID d'unité

### Response JSON Object

- `translation(string)` – URL of a related translation object
- `source(array)` – Chaîne source
- `previous_source(string)` – previous source string used for fuzzy matching
- `target(array)` – Chaîne cible
- `id_hash(string)` – unique identifier of the unit
- `content_hash(string)` – unique identifier of the source string
- `location(string)` – location of the unit in source code
- `context(string)` – translation unit context
- `note(string)` – translation unit note
- `flags(string)` – translation unit flags
- `state(int)` – unit state, 0 - untranslated, 10 - needs editing, 20 - translated, 30 - approved, 100 - read only
- `fuzzy(boolean)` – si l'unité est approximative ou marquée pour révision
- `translated(boolean)` – si l'unité est traduite
- `approved(boolean)` – si la traduction est approuvée
- `position(int)` – unit position in translation file
- `has_suggestion(boolean)` – si l'unité a des suggestions
- `has_comment(boolean)` – si l'unité a des commentaires
- `has_failing_check(boolean)` – si l'unité a échoué aux contrôles
- `num_words(int)` – number of source words
- `priority(int)` – translation priority; 100 is default
- `id(int)` – Identifiant d'unité
- `explanation(string)` – String explanation, available on source units, see [Additional info on source strings](#)
- `extra_flags(string)` – Drapeaux de chaîne supplémentaires, disponibles sur les unités sources, voir [Customizing behavior using flags](#)
- `web_url(string)` – URL where the unit can be edited
- `source_unit(string)` – Source unit link; see `GET /api/units/(int:id)/`

**PATCH** `/api/units/(int: id) /`

Nouveau dans la version 4.3.

Réaliser une mise à jour partielle sur l'unité de traduction.

### Paramètres

- `id(int)` – ID d'unité

### Request JSON Object

- `state(int)` – unit state, 0 - untranslated, 10 - needs editing, 20 - translated, 30 - approved (need review workflow enabled, see [Dedicated reviewers](#))
- `target(array)` – Chaîne cible
- `explanation(string)` – String explanation, available on source units, see [Additional info on source strings](#)

- **extra\_flags** (*string*) – Drapeaux de chaîne supplémentaires, disponibles sur les unités sources, voir [Customizing behavior using flags](#)

**PUT** `/api/units/ (int: id) /`

Nouveau dans la version 4.3.

Réaliser une mise à jour complète sur l'unité de traduction.

**Paramètres**

- **id** (*int*) – ID d'unité

**Request JSON Object**

- **state** (*int*) – unit state, 0 - untranslated, 10 - needs editing, 20 - translated, 30 - approved (need review workflow enabled, see [Dedicated reviewers](#))
- **target** (*array*) – Chaîne cible
- **explanation** (*string*) – String explanation, available on source units, see [Additional info on source strings](#)
- **extra\_flags** (*string*) – Drapeaux de chaîne supplémentaires, disponibles sur les unités sources, voir [Customizing behavior using flags](#)

**DELETE** `/api/units/ (int: id) /`

Nouveau dans la version 4.3.

Supprime une unité de traduction.

**Paramètres**

- **id** (*int*) – ID d'unité

## 1.12.11 Modifications

Nouveau dans la version 2.10.

**GET** `/api/changes/`

Modifié dans la version 4.1 : Filtering of changes was introduced in the 4.1 release.

Returns a list of translation changes.

**Voir aussi :**

Change object attributes are documented at `GET /api/changes/ (int:id) /`.

**Paramètres de requête**

- **user** (*string*) – Username of user to filters
- **action** (*int*) – Action to filter, can be used several times
- **timestamp\_after** (*timestamp*) – ISO 8601 formatted timestamp to list changes after
- **timestamp\_before** (*timestamp*) – ISO 8601 formatted timestamp to list changes before

**GET** `/api/changes/ (int: id) /`

Returns information about translation change.

**Paramètres**

- **id** (*int*) – ID de la modification

**Response JSON Object**

- **unit** (*string*) – URL of a related unit object
- **translation** (*string*) – URL of a related translation object
- **component** (*string*) – URL of a related component object
- **user** (*string*) – URL of a related user object
- **author** (*string*) – URL of a related author object
- **timestamp** (*timestamp*) – Horodatage de l'événement
- **action** (*int*) – numeric identification of action
- **action\_name** (*string*) – text description of action
- **target** (*string*) – event changed text or detail
- **id** (*int*) – Identifiant de l'événement

## 1.12.12 Captures d'écran

Nouveau dans la version 2.14.

**GET /api/screenshots/**

Returns a list of screenshot string information.

**Voir aussi :**

Screenshot object attributes are documented at [GET /api/screenshots/\(int:id\)/](#).

**GET /api/screenshots/(int: id) /**

Returns information about screenshot information.

**Paramètres**

— **id** (*int*) – ID de la capture d'écran

**Response JSON Object**

— **name** (*string*) – name of a screenshot

— **component** (*string*) – URL of a related component object

— **file\_url** (*string*) – URL to download a file; see [GET /api/screenshots/\(int:id\)/file/](#)

— **units** (*array*) – link to associated source string information; see [GET /api/units/\(int:id\)/](#)

**GET /api/screenshots/(int: id) /file/**

Download the screenshot image.

**Paramètres**

— **id** (*int*) – ID de la capture d'écran

**POST /api/screenshots/(int: id) /file/**

Replace screenshot image.

**Paramètres**

— **id** (*int*) – ID de la capture d'écran

**Paramètres de formulaire**

— **file image** – Fichier téléversé

**Exemple CURL :**

```
curl -X POST \
  -F image=@image.png \
  -H "Authorization: Token TOKEN" \
  http://example.com/api/screenshots/1/file/
```

**POST /api/screenshots/(int: id) /units/**

Associate source string with screenshot.

**Paramètres**

— **id** (*int*) – ID de la capture d'écran

**Paramètres de formulaire**

— **string unit\_id** – ID d'unité

**Response JSON Object**

— **name** (*string*) – name of a screenshot

— **translation** (*string*) – URL of a related translation object

— **file\_url** (*string*) – URL to download a file; see [GET /api/screenshots/\(int:id\)/file/](#)

— **units** (*array*) – link to associated source string information; see [GET /api/units/\(int:id\)/](#)

**DELETE /api/screenshots/(int: id) /units/**

**int: unit\_id** Supprimer l'association de la chaîne source avec la capture d'écran.

**Paramètres**

— **id** (*int*) – ID de la capture d'écran

— **unit\_id** – ID de l'unité de la chaîne source

**POST /api/screenshots/**

Creates a new screenshot.

**Paramètres de formulaire**

- **file image** – Fichier téléversé
- **string name** – Nom de la capture d'écran
- **string project\_slug** – Identifiant du projet
- **string component\_slug** – Identifiant du composant
- **string language\_code** – Code langue

**Response JSON Object**

- **name** (*string*) – name of a screenshot
- **component** (*string*) – URL of a related component object
- **file\_url** (*string*) – URL to download a file; see [GET /api/screenshots/\(int:id\)/file/](#)
- **units** (*array*) – link to associated source string information; see [GET /api/units/\(int:id\)/](#)

**PATCH /api/screenshots/(int: id) /**

Modifier les informations partielles sur la capture d'écran.

**Paramètres**

- **id** (*int*) – ID de la capture d'écran

**Response JSON Object**

- **name** (*string*) – name of a screenshot
- **component** (*string*) – URL of a related component object
- **file\_url** (*string*) – URL to download a file; see [GET /api/screenshots/\(int:id\)/file/](#)
- **units** (*array*) – link to associated source string information; see [GET /api/units/\(int:id\)/](#)

**PUT /api/screenshots/(int: id) /**

Modifier les informations complètes sur la capture d'écran.

**Paramètres**

- **id** (*int*) – ID de la capture d'écran

**Response JSON Object**

- **name** (*string*) – name of a screenshot
- **component** (*string*) – URL of a related component object
- **file\_url** (*string*) – URL to download a file; see [GET /api/screenshots/\(int:id\)/file/](#)
- **units** (*array*) – link to associated source string information; see [GET /api/units/\(int:id\)/](#)

**DELETE /api/screenshots/(int: id) /**

Supprimer la capture d'écran.

**Paramètres**

- **id** (*int*) – ID de la capture d'écran

### 1.12.13 Modules

Nouveau dans la version 4.4.1.

**GET /api/addons/**

Returns a list of add-ons.

**Voir aussi :**

Add-on object attributes are documented at [GET /api/addons/\(int:id\)/](#).

**GET /api/addons/(int: id) /**

Returns information about add-on information.

**Paramètres**



— **id** (*int*) – ID du module

#### Response JSON Object

— **name** (*string*) – name of an add-on  
 — **component** (*string*) – URL of a related component object  
 — **configuration** (*object*) – Optional add-on configuration

Voir aussi :

[Modules](#)

**POST** `/api/components/(string: project)/`  
**string:** `component/addons/` Creates a new add-on.

#### Paramètres

— **project\_slug** (*string*) – Identifiant du projet  
 — **component\_slug** (*string*) – Identifiant du composant

#### Request JSON Object

— **name** (*string*) – name of an add-on  
 — **configuration** (*object*) – Optional add-on configuration

**PATCH** `/api/addons/(int: id)/`  
 Edit partial information about add-on.

#### Paramètres

— **id** (*int*) – ID du module

#### Response JSON Object

— **configuration** (*object*) – Optional add-on configuration

**PUT** `/api/addons/(int: id)/`  
 Edit full information about add-on.

#### Paramètres

— **id** (*int*) – ID du module

#### Response JSON Object

— **configuration** (*object*) – Optional add-on configuration

**DELETE** `/api/addons/(int: id)/`  
 Delete add-on.

#### Paramètres

— **id** (*int*) – ID du module

## 1.12.14 Listes de composants

Nouveau dans la version 4.0.

**GET** `/api/component-lists/`  
 Returns a list of component lists.

Voir aussi :

Component list object attributes are documented at [GET /api/component-lists/\(str:slug\)/](#).

**GET** `/api/component-lists/(str: slug)/`  
 Returns information about component list.

#### Paramètres

— **slug** (*string*) – Component list slug

#### Response JSON Object

— **name** (*string*) – name of a component list  
 — **slug** (*string*) – slug of a component list  
 — **show\_dashboard** (*boolean*) – whether to show it on a dashboard  
 — **components** (*array*) – link to associated components; see [GET /api/components/\(string:project\)/\(string:component\)/](#)  
 — **auto\_assign** (*array*) – automatic assignment rules

**PUT** `/api/component-lists/(str: slug) /`

Changes the component list parameters.

**Paramètres**

— **slug** (*string*) – Component list slug

**Request JSON Object**

— **name** (*string*) – name of a component list  
— **slug** (*string*) – slug of a component list  
— **show\_dashboard** (*boolean*) – whether to show it on a dashboard

**PATCH** `/api/component-lists/(str: slug) /`

Changes the component list parameters.

**Paramètres**

— **slug** (*string*) – Component list slug

**Request JSON Object**

— **name** (*string*) – name of a component list  
— **slug** (*string*) – slug of a component list  
— **show\_dashboard** (*boolean*) – whether to show it on a dashboard

**DELETE** `/api/component-lists/(str: slug) /`

Deletes the component list.

**Paramètres**

— **slug** (*string*) – Component list slug

**POST** `/api/component-lists/(str: slug)/components/`

Associate component with a component list.

**Paramètres**

— **slug** (*string*) – Component list slug

**Paramètres de formulaire**

— **string component\_id** – ID du composant

**DELETE** `/api/component-lists/(str: slug)/components/`

**str: component\_slug** Disassociate a component from the component list.

**Paramètres**

— **slug** (*string*) – Component list slug  
— **component\_slug** (*string*) – Identifiant du composant

## 1.12.15 Glossaire

Modifié dans la version 4.5 : Glossaries are now stored as regular components, translations and strings, please use respective API instead.

## 1.12.16 Tâches

Nouveau dans la version 4.4.

**GET** `/api/tasks/`

L'affichage de la liste des tâches est actuellement non disponible.

**GET** `/api/tasks/(str: uuid) /`

Renvoie des informations à propos d'une tâche

**Paramètres**

— **uuid** (*string*) – Task UUID

**Response JSON Object**

— **completed** (*boolean*) – Si la tâche est achevée  
— **progress** (*int*) – Task progress in percent  
— **result** (*object*) – Task result or progress details  
— **log** (*string*) – Journal des tâches

### 1.12.17 Metrics

**GET** `/api/metrics/`

Returns server metrics.

#### Response JSON Object

- **units** (*int*) – Number of units
- **units\_translated** (*int*) – Number of translated units
- **users** (*int*) – Number of users
- **changes** (*int*) – Nombre de modifications
- **projects** (*int*) – Number of projects
- **components** (*int*) – Nombre de composants
- **translations** (*int*) – Number of translations
- **languages** (*int*) – Number of used languages
- **checks** (*int*) – Number of triggered quality checks
- **configuration\_errors** (*int*) – Number of configuration errors
- **suggestions** (*int*) – Number of pending suggestions
- **celery\_queues** (*object*) – Lengths of Celery queues, see [Background tasks using Celery](#)
- **name** (*string*) – Nom du serveur configuré

### 1.12.18 Déclencheurs de notification

Notification hooks allow external applications to notify Weblate that the VCS repository has been updated.

You can use repository endpoints for projects, components and translations to update individual repositories; see [POST /api/projects/\(string:project\)/repository/](#) for documentation.

**GET** `/hooks/update/(string: project) /`

**string:** *component* / Obsolète depuis la version 2.6 : Please use [POST /api/components/\(string:project\)/\(string:component\)/repository/](#) instead which works properly with authentication for ACL limited projects.

Triggers update of a component (pulling from VCS and scanning for translation changes).

**GET** `/hooks/update/(string: project) /`

Obsolète depuis la version 2.6 : Please use [POST /api/projects/\(string:project\)/repository/](#) instead which works properly with authentication for ACL limited projects.

Triggers update of all components in a project (pulling from VCS and scanning for translation changes).

**POST** `/hooks/github/`

Special hook for handling GitHub notifications and automatically updating matching components.

---

**Note :** GitHub includes direct support for notifying Weblate : enable Weblate service hook in repository settings and set the URL to the URL of your Weblate installation.

---

**Voir aussi :**

[Automatically receiving changes from GitHub](#) For instruction on setting up GitHub integration

<https://docs.github.com/en/get-started/customizing-your-github-workflow/exploring-integrations/about-webhooks>

Generic information about GitHub Webhooks

[ENABLE\\_HOOKS](#) For enabling hooks for whole Weblate

**POST** `/hooks/gitlab/`

Special hook for handling GitLab notifications and automatically updating matching components.

**Voir aussi :**

[Automatically receiving changes from GitLab](#) For instruction on setting up GitLab integration

<https://docs.gitlab.com/ee/user/project/integrations/webhooks.html> Generic information about GitLab Webhooks

**ENABLE\_HOOKS** For enabling hooks for whole Weblate

**POST /hooks/bitbucket/**

Special hook for handling Bitbucket notifications and automatically updating matching components.

**Voir aussi :**

*Automatically receiving changes from Bitbucket* For instruction on setting up Bitbucket integration

<https://support.atlassian.com/bitbucket-cloud/docs/manage-webhooks/> Generic information about Bitbucket Webhooks

**ENABLE\_HOOKS** For enabling hooks for whole Weblate

**POST /hooks/pagure/**

Nouveau dans la version 3.3.

Special hook for handling Pagure notifications and automatically updating matching components.

**Voir aussi :**

*Automatically receiving changes from Pagure* For instruction on setting up Pagure integration

[https://docs.pagure.org/pagure/usage/using\\_webhooks.html](https://docs.pagure.org/pagure/usage/using_webhooks.html) Generic information about Pagure Webhooks

**ENABLE\_HOOKS** For enabling hooks for whole Weblate

**POST /hooks/azure/**

Nouveau dans la version 3.8.

Special hook for handling Azure Repos notifications and automatically updating matching components.

**Voir aussi :**

*Automatically receiving changes from Azure Repos* For instruction on setting up Azure integration

<https://docs.microsoft.com/fr-fr/azure/devops/service-hooks/services/webhooks?view=azure-devops> Generic information about Azure Repos Web Hooks

**ENABLE\_HOOKS** For enabling hooks for whole Weblate

**POST /hooks/gitea/**

Nouveau dans la version 3.9.

Special hook for handling Gitea Webhook notifications and automatically updating matching components.

**Voir aussi :**

*Automatically receiving changes from Gitea Repos* For instruction on setting up Gitea integration

<https://docs.gitea.io/en-us/webhooks/> Generic information about Gitea Webhooks

**ENABLE\_HOOKS** For enabling hooks for whole Weblate

**POST /hooks/gitee/**

Nouveau dans la version 3.9.

Special hook for handling Gitee Webhook notifications and automatically updating matching components.

**Voir aussi :**

*Automatically receiving changes from Gitee Repos* For instruction on setting up Gitee integration

<https://gitee.com/help/categories/40> Generic information about Gitee Webhooks

**ENABLE\_HOOKS** For enabling hooks for whole Weblate

## 1.12.19 Exports

Weblate provides various exports to allow you to further process the data.

**GET /exports/stats/ (string: project) /**  
**string: component/**

**Paramètres de requête**

— **format** (string) – Output format : either json or csv

Obsolète depuis la version 2.6 : Please use `GET /api/components/(string:project)/(string:component)/statistics/` and `GET /api/translations/(string:project)/(string:component)/(string:language)/statistics/` instead; it allows access to ACL controlled projects as well.

Retrieves statistics for given component in given format.

**Exemple de requête :**

```
GET /exports/stats/weblate/main/ HTTP/1.1
Host: example.com
Accept: application/json, text/javascript
```

**Exemple de réponse :**

```
HTTP/1.1 200 OK
Vary: Accept
Content-Type: application/json

[
  {
    "code": "cs",
    "failing": 0,
    "failing_percent": 0.0,
    "fuzzy": 0,
    "fuzzy_percent": 0.0,
    "last_author": "Michal Čihař",
    "last_change": "2012-03-28T15:07:38+00:00",
    "name": "Czech",
    "total": 436,
    "total_words": 15271,
    "translated": 436,
    "translated_percent": 100.0,
    "translated_words": 3201,
    "url": "http://hosted.weblate.org/engage/weblate/cs/",
    "url_translate": "http://hosted.weblate.org/projects/weblate/main/cs/"
  },
  {
    "code": "nl",
    "failing": 21,
    "failing_percent": 4.8,
    "fuzzy": 11,
    "fuzzy_percent": 2.5,
    "last_author": null,
    "last_change": null,
    "name": "Dutch",
    "total": 436,
    "total_words": 15271,
    "translated": 319,
    "translated_percent": 73.2,
    "translated_words": 3201,
    "url": "http://hosted.weblate.org/engage/weblate/nl/",
    "url_translate": "http://hosted.weblate.org/projects/weblate/main/nl/"
  },
  {
    "code": "el",
    "failing": 11,
    "failing_percent": 2.5,
    "fuzzy": 21,
    "fuzzy_percent": 4.8,
    "last_author": null,
    "last_change": null,
    "name": "Greek",
    "total": 436,
```

(suite sur la page suivante)

(suite de la page précédente)

```
"total_words": 15271,  
"translated": 312,  
"translated_percent": 71.6,  
"translated_words": 3201,  
"url": "http://hosted.weblate.org/engage/weblate/el/",  
"url_translate": "http://hosted.weblate.org/projects/weblate/main/el/"  
}  
]
```

## 1.12.20 Flux RSS

Changes in translations are exported in RSS feeds.

**GET** `/exports/rss/ (string: project) /`  
`string: component/string: language/` Retrieves RSS feed with recent changes for a translation.

**GET** `/exports/rss/ (string: project) /`  
`string: component/` Retrieves RSS feed with recent changes for a component.

**GET** `/exports/rss/ (string: project) /`  
Retrieves RSS feed with recent changes for a project.

**GET** `/exports/rss/language/ (string: language) /`  
Retrieves RSS feed with recent changes for a language.

**GET** `/exports/rss/`  
Retrieves RSS feed with recent changes for Weblate instance.

**Voir aussi :**

[RSS sur Wikipédia](#)

## 1.13 Client Weblate

Nouveau dans la version 2.7 : There has been full `wlc` utility support ever since Weblate 2.7. If you are using an older version some incompatibilities with the API might occur.

### 1.13.1 Installation

The Weblate Client is shipped separately and includes the Python module. To use the commands below, you need to install `wlc` :

```
pip3 install wlc
```

### 1.13.2 Utilisation de Docker

The Weblate Client is also available as a Docker image.

The image is published on Docker Hub : <https://hub.docker.com/r/weblate/wlc>

Installation :

```
docker pull weblate/wlc
```

The Docker container uses Weblate's default settings and connects to the API deployed in localhost. The API URL and API\_KEY can be configured through the arguments accepted by Weblate.

The command to launch the container uses the following syntax :

```
docker run --rm weblate/wlc [WLC_ARGS]
```

Exemple :

```
docker run --rm weblate/wlc --url https://hosted.weblate.org/api/ list-projects
```

You might want to pass your *Fichiers de configuration* to the Docker container, the easiest approach is to add your current directory as `/home/weblate` volume :

```
docker run --volume $PWD:/home/weblate --rm weblate/wlc show
```

### 1.13.3 Getting started

The `wlc` configuration is stored in `~/.config/weblate` (see *Fichiers de configuration* for other locations), please create it to match your environment :

```
[weblate]
url = https://hosted.weblate.org/api/

[keys]
https://hosted.weblate.org/api/ = APIKEY
```

You can then invoke commands on the default server :

```
wlc ls
wlc commit sandbox/hello-world
```

**Voir aussi :**

*Fichiers de configuration*

### 1.13.4 Synopsis

```
wlc [arguments] <command> [options]
```

Commands actually indicate which operation should be performed.

### 1.13.5 Description

Weblate Client is a Python library and command-line utility to manage Weblate remotely using *API REST de Weblate*. The command-line utility can be invoked as **wlc** and is built-in on *wlc*.

#### Arguments

The program accepts the following arguments which define output format or which Weblate instance to use. These must be entered before any command.

**--format** {csv,json,text,html}  
Specify the output format.

**--url** URL  
Specify the API URL. Overrides any value found in the configuration file, see *Fichiers de configuration*. The URL should end with `/api/`, for example `https://hosted.weblate.org/api/`.

**--key** KEY  
Specify the API user key to use. Overrides any value found in the configuration file, see *Fichiers de configuration*. You can find your key in your profile on Weblate.

**--config** PATH

Overrides the configuration file path, see *Fichiers de configuration*.

**--config-section** SECTION

Overrides configuration file section in use, see *Fichiers de configuration*.

### Commandes

The following commands are available :

**version**

Prints the current version.

**list-languages**

Lists used languages in Weblate.

**list-projects**

Lists projects in Weblate.

**list-components**

Lists components in Weblate.

**list-translations**

Lists translations in Weblate.

**show**

Shows Weblate object (translation, component or project).

**ls**

Lists Weblate object (translation, component or project).

**commit**

Commits changes made in a Weblate object (translation, component or project).

**pull**

Pulls remote repository changes into Weblate object (translation, component or project).

**push**

Pushes Weblate object changes into remote repository (translation, component or project).

**reset**

Nouveau dans la version 0.7 : Supported since wlc 0.7.

Resets changes in Weblate object to match remote repository (translation, component or project).

**cleanup**

Nouveau dans la version 0.9 : Supported since wlc 0.9.

Removes any untracked changes in a Weblate object to match the remote repository (translation, component or project).

**repo**

Displays repository status for a given Weblate object (translation, component or project).

**statistics**

Displays detailed statistics for a given Weblate object (translation, component or project).

**lock-status**

Nouveau dans la version 0.5 : Supported since wlc 0.5.

Displays lock status.

**lock**

Nouveau dans la version 0.5 : Supported since wlc 0.5.

Locks component from further translation in Weblate.

**unlock**

Nouveau dans la version 0.5 : Supported since wlc 0.5.

Unlocks translation of Weblate component.



**changes**

Nouveau dans la version 0.7 : Supported since wlc 0.7 and Weblate 2.10.

Displays changes for a given object.

**download**

Nouveau dans la version 0.7 : Supported since wlc 0.7.

Downloads a translation file.

**--convert**

Converts file format, if unspecified no conversion happens on the server and the file is downloaded as is to the repository.

**--output**

Specifies file to save output in, if left unspecified it is printed to stdout.

**upload**

Nouveau dans la version 0.9 : Supported since wlc 0.9.

Uploads a translation file.

**--overwrite**

Overwrite existing translations upon uploading.

**--input**

File from which content is read, if left unspecified it is read from stdin.

**--method**

Upload method to use, see [Import methods](#).

**--fuzzy**

Fuzzy (marked for edit) strings processing (*empty*, *process*, *approve*)

**--author-name**

Author name, to override currently authenticated user

**--author-email**

Author e-mail, to override currently authenticated user

---

**Indication :** You can get more detailed information on invoking individual commands by passing `--help`, for example: `wlc ls --help`.

---

### 1.13.6 Fichiers de configuration

**.weblate**, **.weblate.ini**, **weblate.ini** Modifié dans la version 1.6 : The files with *.ini* extension are accepted as well.

Per project configuration file

**C:\Users\NAME\AppData\weblate.ini** Nouveau dans la version 1.6.

User configuration file on Windows.

**~/ .config/weblate** User configuration file

**/etc/xdg/weblate** System wide configuration file

The program follows the XDG specification, so you can adjust placement of config files by environment variables `XDG_CONFIG_HOME` or `XDG_CONFIG_DIRS`. On Windows APPDATA directory is preferred location for the configuration file.

Following settings can be configured in the `[weblate]` section (you can customize this by [--config-section](#)):

**key**

Clé d'API pour accéder à Weblate.

**url**

API server URL, defaults to `http://127.0.0.1:8000/api/`.

**translation**

Path to the default translation - component or project.

The configuration file is an INI file, for example :

```
[weblate]
url = https://hosted.weblate.org/api/
key = APIKEY
translation = weblate/application
```

Additionally API keys can be stored in the [keys] section :

```
[keys]
https://hosted.weblate.org/api/ = APIKEY
```

This allows you to store keys in your personal settings, while using the .weblate configuration in the VCS repository so that wlc knows which server it should talk to.

### 1.13.7 Examples

Print current program version :

```
$ wlc version
version: 0.1
```

List all projects :

```
$ wlc list-projects
name: Hello
slug: hello
url: http://example.com/api/projects/hello/
web: https://weblate.org/
web_url: http://example.com/projects/hello/
```

Upload translation file :

```
$ wlc upload project/component/language --input /tmp/hello.po
```

You can also designate what project wlc should work on :

```
$ cat .weblate
[weblate]
url = https://hosted.weblate.org/api/
translation = weblate/application

$ wlc show
branch: main
file_format: po
source_language: en
filemask: weblate/locale/*/LC_MESSAGES/django.po
git_export: https://hosted.weblate.org/git/weblate/application/
license: GPL-3.0+
license_url: https://spdx.org/licenses/GPL-3.0+
name: Application
new_base: weblate/locale/django.pot
project: weblate
repo: git://github.com/WeblateOrg/weblate.git
slug: application
template:
url: https://hosted.weblate.org/api/components/weblate/application/
vcs: git
web_url: https://hosted.weblate.org/projects/weblate/application/
```

With this setup it is easy to commit pending changes in the current project :

```
$ wlc commit
```

## 1.14 API Python de Weblate

### 1.14.1 Installation

The Python API is shipped separately, you need to install the *Client Weblate* (wlc) to have it.

```
pip install wlc
```

### 1.14.2 wlc

#### WeblateException

**exception** `wlc.WeblateException`  
Base class for all exceptions.

#### Weblate

**class** `wlc.Weblate` (*key=""*, *url=None*, *config=None*)

##### Paramètres

- **key** (*str*) – User key
- **url** (*str*) – API server URL, if not specified default is used
- **config** (`wlc.config.WeblateConfig`) – Configuration object, overrides any other parameters.

Access class to the API, define API key and optionally API URL.

**get** (*path*)

**Paramètres** **path** (*str*) – Request path

**Type renvoyé** object

Performs a single API GET call.

**post** (*path*, *\*\*kwargs*)

**Paramètres** **path** (*str*) – Request path

**Type renvoyé** object

Performs a single API GET call.

### 1.14.3 wlc.config

#### WeblateConfig

**class** `wlc.config.WeblateConfig` (*section='wlc'*)

**Paramètres** **section** (*str*) – Configuration section to use

Configuration file parser following XDG specification.

**load** (*path=None*)

**Paramètres** **path** (*str*) – Path from which to load configuration.

Loads configuration from a file, if none is specified, it loads from the *wlc* configuration file (`~/ .config/ wlc`) placed in your XDG configuration path (`/etc/xdg/wlc`).

### 1.14.4 `wlc.main`

`wlc.main.main` (*settings=None, stdout=None, args=None*)

#### Paramètres

- **settings** (*list*) – Settings to override as list of tuples
- **stdout** (*object*) – stdout file object for printing output, uses `sys.stdout` as default
- **args** (*list*) – Command-line arguments to process, uses `sys.args` as default

Main entry point for command-line interface.

`@wlc.main.register_command` (*command*)

Decorator to register *Command* class in main parser used by `main()`.

#### Commande

**class** `wlc.main.Command` (*args, config, stdout=None*)

Main class for invoking commands.

## 2.1 Instructions de configuration

### 2.1.1 Installer Weblate

#### Installing using Docker

With dockerized Weblate deployment you can get your personal Weblate instance up and running in seconds. All of Weblate's dependencies are already included. PostgreSQL is set up as the default database.

#### Exigences matérielles

Weblate should run on any contemporary hardware without problems, the following is the minimal configuration required to run Weblate on a single host (Weblate, database and webserver) :

- 2 GB of RAM
- 2 CPU cores
- 1 GB of storage space

The more memory the better - it is used for caching on all levels (filesystem, database and Weblate).

Many concurrent users increases the amount of needed CPU cores. For hundreds of translation components at least 4 GB of RAM is recommended.

The typical database storage usage is around 300 MB per 1 million hosted words. Storage space needed for cloned repositories varies, but Weblate tries to keep their size minimal by doing shallow clones.

---

**Note :** Actual requirements for your installation of Weblate vary heavily based on the size of the translations managed in it.

---

### Installation

The following examples assume you have a working Docker environment, with `docker-compose` installed. Please check the Docker documentation for instructions.

1. Clone the weblate-docker repo :

```
git clone https://github.com/WeblateOrg/docker-compose.git weblate-docker
cd weblate-docker
```

2. Create a `docker-compose.override.yml` file with your settings. See [Docker environment variables](#) for full list of environment variables.

```
version: '3'
services:
  weblate:
    ports:
      - 80:8080
    environment:
      WEBLATE_EMAIL_HOST: smtp.example.com
      WEBLATE_EMAIL_HOST_USER: user
      WEBLATE_EMAIL_HOST_PASSWORD: pass
      WEBLATE_SERVER_EMAIL: weblate@example.com
      WEBLATE_DEFAULT_FROM_EMAIL: weblate@example.com
      WEBLATE_SITE_DOMAIN: weblate.example.com
      WEBLATE_ADMIN_PASSWORD: password for the admin user
      WEBLATE_ADMIN_EMAIL: weblate.admin@example.com
```

---

**Note :** If `WEBLATE_ADMIN_PASSWORD` is not set, the admin user is created with a random password shown on first startup.

The provided example makes Weblate listen on port 80, edit the port mapping in the `docker-compose.override.yml` file to change it.

---

3. Start Weblate containers :

```
docker-compose up
```

Enjoy your Weblate deployment, it's accessible on port 80 of the `weblate` container.

Modifié dans la version 2.15-2 : The setup has changed recently, priorly there was separate web server container, since 2.15-2 the web server is embedded in the Weblate container.

Modifié dans la version 3.7.1-6 : In July 2019 (starting with the 3.7.1-6 tag), the containers are not running as a root user. This has changed the exposed port from 80 to 8080.

**Voir aussi :**

*[Invoking management commands](#)*

### Choosing Docker hub tag

You can use following tags on Docker hub, see <https://hub.docker.com/r/weblate/weblate/tags/> for full list of available ones.

Tag name	Description	Use case
latest	Weblate stable release, matches latest tagged release	Rolling updates in a production environment
<VERSION>-<PLATFORM>	Weblate stable release	Well defined deploy in a production environment
edge	Weblate stable release with development changes in the Docker container (for example updated dependencies)	Rolling updates in a staging environment
edge-<DATE>-<PLATFORM>	Weblate stable release with development changes in the Docker container (for example updated dependencies)	Well defined deploy in a staging environment
bleeding	Development version Weblate from Git	Rolling updates to test upcoming Weblate features
bleeding-<DATE>-<PLATFORM>	Development version Weblate from Git	Well defined deploy to test upcoming Weblate features

Every image is tested by our CI before it gets published, so even the *bleeding* version should be quite safe to use.

## Docker container with HTTPS support

Please see [Installation](#) for generic deployment instructions, this section only mentions differences compared to it.

## Using own SSL certificates

Nouveau dans la version 3.8-3.

In case you have own SSL certificate you want to use, simply place the files into the Weblate data volume (see [Docker container volumes](#)) :

- `ssl/fullchain.pem` containing the certificate including any needed CA certificates
- `ssl/privkey.pem` containing the private key

Both of these files must be owned by the same user as the one starting the docker container and have file mask set to 600 (readable and writable only by the owning user).

Additionally, Weblate container will now accept SSL connections on port 4443, you will want to include the port forwarding for HTTPS in docker compose override :

```
version: '3'
services:
  weblate:
    ports:
      - 80:8080
      - 443:4443
```

If you already host other sites on the same server, it is likely ports 80 and 443 are used by a reverse proxy, such as NGINX. To pass the HTTPS connection from NGINX to the docker container, you can use the following configuration :

```
server {
    listen 443;
    listen [::]:443;

    server_name <SITE_URL>;
    ssl_certificate /etc/letsencrypt/live/<SITE>/fullchain.pem;
    ssl_certificate_key /etc/letsencrypt/live/<SITE>/privkey.pem;

    location / {
        proxy_set_header HOST $host;
        proxy_set_header X-Forwarded-Proto https;
        proxy_set_header X-Real-IP $remote_addr;
```

(suite sur la page suivante)

(suite de la page précédente)

```
    proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
    proxy_set_header X-Forwarded-Host $server_name;
    proxy_pass https://127.0.0.1:<EXPOSED_DOCKER_PORT>;
  }
}
```

Replace <SITE\_URL>, <SITE> and <EXPOSED\_DOCKER\_PORT> with actual values from your environment.

### Automatic SSL certificates using Let's Encrypt

In case you want to use [Let's Encrypt](#) automatically generated SSL certificates on public installation, you need to add a reverse HTTPS proxy an additional Docker container, `https-portal` will be used for that. This is made use of in the `docker-compose-https.yml` file. Then create a `docker-compose-https.override.yml` file with your settings :

```
version: '3'
services:
  weblate:
    environment:
      WEBLATE_EMAIL_HOST: smtp.example.com
      WEBLATE_EMAIL_HOST_USER: user
      WEBLATE_EMAIL_HOST_PASSWORD: pass
      WEBLATE_SITE_DOMAIN: weblate.example.com
      WEBLATE_ADMIN_PASSWORD: password for admin user
  https-portal:
    environment:
      DOMAINS: 'weblate.example.com -> http://weblate:8080'
```

Whenever invoking `docker-compose` you need to pass both files to it, and then do :

```
docker-compose -f docker-compose-https.yml -f docker-compose-https.override.yml ↵
↵build
docker-compose -f docker-compose-https.yml -f docker-compose-https.override.yml up
```

### Upgrading the Docker container

Usually it is good idea to only update the Weblate container and keep the PostgreSQL container at the version you have, as upgrading PostgreSQL is quite painful and in most cases does not bring many benefits.

Modifié dans la version 4.10-1 : Since Weblate 4.10-1, the Docker container uses Django 4.0 what requires PostgreSQL 10 or newer, please upgrade it prior to upgrading Weblate. See [Upgrade from 4.9 to 4.10](#) and [Upgrading PostgreSQL container](#).

You can do this by sticking with the existing docker-compose and just pull the latest images and then restart :

```
# Fetch latest versions of the images
docker-compose pull
# Stop and destroy the containers
docker-compose down
# Spawn new containers in the background
docker-compose up -d
# Follow the logs during upgrade
docker-compose logs -f
```

The Weblate database should be automatically migrated on first startup, and there should be no need for additional manual actions.



**Note :** Upgrades across 3.0 are not supported by Weblate. If you are on 2.x series and want to upgrade to 3.x, first upgrade to the latest 3.0.1-x (at time of writing this it is the 3.0.1-7) image, which will do the migration and then continue upgrading to newer versions.

You might also want to update the `docker-compose` repository, though it's not needed in most case. See [Upgrading PostgreSQL container](#) for upgrading the PostgreSQL server.

## Upgrading PostgreSQL container

PostgreSQL containers do not support automatic upgrading between version, you need to perform the upgrade manually. Following steps show one of the options of upgrading.

**Voir aussi :**

<https://github.com/docker-library/postgres/issues/37>

1. Stop Weblate container :

```
docker-compose stop weblate cache
```

2. Backup the database :

```
docker-compose exec database pg_dumpall --clean --username weblate > backup.  
↪sql
```

3. Stop the database container :

```
docker-compose stop database
```

4. Remove the PostgreSQL volume

```
docker-compose rm -v database  
docker volume remove weblate_postgres-data
```

5. Adjust `docker-compose.yml` to use new PostgreSQL version.

6. Start the database container :

```
docker-compose up -d database
```

7. Restore the database from the backup :

```
cat backup.sql | docker-compose exec -T database psql --username weblate --  
↪dbname postgres
```

8. Start all remaining containers :

```
docker-compose up -d
```

## Connexion en tant qu'administrateur

After container setup, you can sign in as *admin* user with password provided in `WEBLATE_ADMIN_PASSWORD`, or a random password generated on first start if that was not set.

To reset *admin* password, restart the container with `WEBLATE_ADMIN_PASSWORD` set to new password.

**Voir aussi :**

`WEBLATE_ADMIN_PASSWORD`, `WEBLATE_ADMIN_NAME`, `WEBLATE_ADMIN_EMAIL`

## Number of processes and memory consumption

The number of worker processes for both uWSGI and Celery is determined automatically based on number of CPUs. This works well for most cloud virtual machines as these typically have few CPUs and good amount of memory.

In case you have a lot of CPU cores and hit out of memory issues, try reducing number of workers :

```
environment:
  WEBLATE_WORKERS: 2
```

You can also fine-tune individual worker categories :

```
environment:
  WEB_WORKERS: 4
  CELERY_MAIN_OPTIONS: --concurrency 2
  CELERY_NOTIFY_OPTIONS: --concurrency 1
  CELERY_TRANSLATE_OPTIONS: --concurrency 1
```

Voir aussi :

*WEBLATE\_WORKERS* *CELERY\_MAIN\_OPTIONS*, *CELERY\_NOTIFY\_OPTIONS*, *CELERY\_MEMORY\_OPTIONS*, *CELERY\_TRANSLATE\_OPTIONS*, *CELERY\_BACKUP\_OPTIONS*, *CELERY\_BEAT\_OPTIONS*, *WEB\_WORKERS*

## Scaling horizontally

Nouveau dans la version 4.6.

**Avertissement** : Cette fonction est un aperçu technologique.

You can run multiple Weblate containers to scale the service horizontally. The `/app/data` volume has to be shared by all containers, it is recommended to use cluster filesystem such as GlusterFS for this. The `/app/cache` volume should be separate for each container.

Each Weblate container has defined role using `WEBLATE_SERVICE` environment variable. Please follow carefully the documentation as some of the services should be running just once in the cluster and the ordering of the services matters as well.

You can find example setup in the `docker-compose` repo as [docker-compose-split.yml](#).

## Docker environment variables

Many of Weblate's *Configuration* can be set in the Docker container using environment variables :

## Paramètres génériques

### WEBLATE\_DEBUG

Configures Django debug mode using `DEBUG`.

Exemple :

```
environment:
  WEBLATE_DEBUG: 1
```

Voir aussi :

*Disable debug mode*

**WEBLATE\_LOGLEVEL**

Configures the logging verbosity.

**WEBLATE\_SITE\_TITLE**

Changes the site-title shown in the header of all pages.

**WEBLATE\_SITE\_DOMAIN**

Configures the site domain. This parameter is required.

**Voir aussi :**

*Set correct site domain, SITE\_DOMAIN*

**WEBLATE\_ADMIN\_NAME****WEBLATE\_ADMIN\_EMAIL**

Configures the site-admin's name and e-mail. It is used for both *ADMINS* setting and creating *admin* user (see *WEBLATE\_ADMIN\_PASSWORD* for more info on that).

**Exemple :**

```
environment:
  WEBLATE_ADMIN_NAME: Weblate admin
  WEBLATE_ADMIN_EMAIL: noreply@example.com
```

**Voir aussi :**

*Connexion en tant qu'administrateur, Properly configure admins, ADMINS*

**WEBLATE\_ADMIN\_PASSWORD**

Sets the password for the *admin* user.

- If not set and *admin* user does not exist, it is created with a random password shown on first container startup.
- If not set and *admin* user exists, no action is performed.
- If set the *admin* user is adjusted on every container startup to match *WEBLATE\_ADMIN\_PASSWORD*, *WEBLATE\_ADMIN\_NAME* and *WEBLATE\_ADMIN\_EMAIL*.

**Avertissement :** It might be a security risk to store password in the configuration file. Consider using this variable only for initial setup (or let Weblate generate random password on initial startup) or for password recovery.

**Voir aussi :**

*Connexion en tant qu'administrateur, WEBLATE\_ADMIN\_PASSWORD, WEBLATE\_ADMIN\_PASSWORD\_FILE, WEBLATE\_ADMIN\_NAME, WEBLATE\_ADMIN\_EMAIL*

**WEBLATE\_ADMIN\_PASSWORD\_FILE**

Sets the path to a file containing the password for the *admin* user.

**Voir aussi :**

*WEBLATE\_ADMIN\_PASSWORD*

**WEBLATE\_SERVER\_EMAIL**

The email address that error messages are sent from.

**Voir aussi :**

*SERVER\_EMAIL, Configure e-mail sending*

**WEBLATE\_DEFAULT\_FROM\_EMAIL**

Configures the address for outgoing e-mails.

**Voir aussi :**

*DEFAULT\_FROM\_EMAIL, Configure e-mail sending*

**WEBLATE\_CONTACT\_FORM**

Configures contact form behavior, see *CONTACT\_FORM*.

**WEBLATE\_ALLOWED\_HOSTS**

Configures allowed HTTP hostnames using *ALLOWED\_HOSTS*.

Defaults to *\** which allows all hostnames.

Exemple :

```
environment:
  WEBLATE_ALLOWED_HOSTS: weblate.example.com,example.com
```

Voir aussi :

[ALLOWED\\_HOSTS](#), [Allowed hosts setup](#), [Set correct site domain](#)

#### WEBLATE\_REGISTRATION\_OPEN

Configures whether registrations are open by toggling [REGISTRATION\\_OPEN](#).

Exemple :

```
environment:
  WEBLATE_REGISTRATION_OPEN: 0
```

#### WEBLATE\_REGISTRATION\_ALLOW\_BACKENDS

Configure which authentication methods can be used to create new account via [REGISTRATION\\_ALLOW\\_BACKENDS](#).

Exemple :

```
environment:
  WEBLATE_REGISTRATION_OPEN: 0
  WEBLATE_REGISTRATION_ALLOW_BACKENDS: azuread-oauth2,azuread-tenant-
  ↪oauth2
```

#### WEBLATE\_TIME\_ZONE

Configures the used time zone in Weblate, see [TIME\\_ZONE](#).

---

**Note :** To change the time zone of the Docker container itself, use the TZ environment variable.

---

Exemple :

```
environment:
  WEBLATE_TIME_ZONE: Europe/Prague
```

#### WEBLATE\_ENABLE\_HTTPS

Makes Weblate assume it is operated behind a reverse HTTPS proxy, it makes Weblate use HTTPS in e-mail and API links or set secure flags on cookies.

---

**Indication :** Please see [ENABLE\\_HTTPS](#) documentation for possible caveats.

---

---

**Note :** This does not make the Weblate container accept HTTPS connections, you need to configure that as well, see [Docker container with HTTPS support](#) for examples.

---

Exemple :

```
environment:
  WEBLATE_ENABLE_HTTPS: 1
```

Voir aussi :

[ENABLE\\_HTTPS](#) [Set correct site domain](#), [WEBLATE\\_SECURE\\_PROXY\\_SSL\\_HEADER](#)

#### WEBLATE\_IP\_PROXY\_HEADER

Lets Weblate fetch the IP address from any given HTTP header. Use this when using a reverse proxy in front of the Weblate container.

Enables [IP\\_BEHIND\\_REVERSE\\_PROXY](#) and sets [IP\\_PROXY\\_HEADER](#).

---

**Note :** The format must conform to Django's expectations. Django [transforms](#) raw HTTP header names as follows :

- converts all characters to uppercase
  - replaces any hyphens with underscores
  - prepends HTTP\_ prefix
- So X-Forwarded-For would be mapped to HTTP\_X\_FORWARDED\_FOR.

**Exemple :**

```
environment:
  WEBLATE_IP_PROXY_HEADER: HTTP_X_FORWARDED_FOR
```

**WEBLATE\_SECURE\_PROXY\_SSL\_HEADER**

A tuple representing a HTTP header/value combination that signifies a request is secure. This is needed when Weblate is running behind a reverse proxy doing SSL termination which does not pass standard HTTPS headers.

**Exemple :**

```
environment:
  WEBLATE_SECURE_PROXY_SSL_HEADER: HTTP_X_FORWARDED_PROTO,https
```

**Voir aussi :**

`SECURE_PROXY_SSL_HEADER`

**WEBLATE\_REQUIRE\_LOGIN**

Enables `REQUIRE_LOGIN` to enforce authentication on whole Weblate.

**Exemple :**

```
environment:
  WEBLATE_REQUIRE_LOGIN: 1
```

**WEBLATE\_LOGIN\_REQUIRED\_URLS\_EXCEPTIONS****WEBLATE\_ADD\_LOGIN\_REQUIRED\_URLS\_EXCEPTIONS****WEBLATE\_REMOVE\_LOGIN\_REQUIRED\_URLS\_EXCEPTIONS**

Adds URL exceptions for authentication required for the whole Weblate installation using `LOGIN_REQUIRED_URLS_EXCEPTIONS`.

You can either replace whole settings, or modify default value using ADD and REMOVE variables.

**WEBLATE\_GOOGLE\_ANALYTICS\_ID**

Configures ID for Google Analytics by changing `GOOGLE_ANALYTICS_ID`.

**WEBLATE\_GITHUB\_USERNAME**

Configures GitHub username for GitHub pull-requests by changing `GITHUB_USERNAME`.

**Voir aussi :**

*GitHub pull requests*

**WEBLATE\_GITHUB\_TOKEN**

Nouveau dans la version 4.3.

Configures GitHub personal access token for GitHub pull-requests via API by changing `GITHUB_TOKEN`.

**Voir aussi :**

*GitHub pull requests*

**WEBLATE\_GITLAB\_USERNAME**

Configures GitLab username for GitLab merge-requests by changing `GITLAB_USERNAME`

**Voir aussi :**

*GitLab merge requests*

**WEBLATE\_GITLAB\_TOKEN**

Configures GitLab personal access token for GitLab merge-requests via API by changing `GITLAB_TOKEN`

**Voir aussi :**

*GitLab merge requests*

**WEBLATE\_PAGURE\_USERNAME**

Configures Pagure username for Pagure merge-requests by changing *PAGURE\_USERNAME*

Voir aussi :

*Pagure merge requests*

**WEBLATE\_PAGURE\_TOKEN**

Configures Pagure personal access token for Pagure merge-requests via API by changing *PAGURE\_TOKEN*

Voir aussi :

*Pagure merge requests*

**WEBLATE\_DEFAULT\_PULL\_MESSAGE**

Configures the default title and message for pull requests via API by changing *DEFAULT\_PULL\_MESSAGE*

Voir aussi :

*DEFAULT\_PULL\_MESSAGE*

**WEBLATE\_SIMPLIFY\_LANGUAGES**

Configures the language simplification policy, see *SIMPLIFY\_LANGUAGES*.

**WEBLATE\_DEFAULT\_ACCESS\_CONTROL**

Configures the default *Contrôle d'accès* for new projects, see *DEFAULT\_ACCESS\_CONTROL*.

**WEBLATE\_DEFAULT\_RESTRICTED\_COMPONENT**

Configures the default value for *Accès restreint* for new components, see *DEFAULT\_RESTRICTED\_COMPONENT*.

**WEBLATE\_DEFAULT\_TRANSLATION\_PROPAGATION**

Configures the default value for *Permettre la propagation de la traduction* for new components, see *DEFAULT\_TRANSLATION\_PROPAGATION*.

**WEBLATE\_DEFAULT\_COMMITER\_EMAIL**

Configures *DEFAULT\_COMMITER\_EMAIL*.

**WEBLATE\_DEFAULT\_COMMITER\_NAME**

Configures *DEFAULT\_COMMITER\_NAME*.

**WEBLATE\_DEFAULT\_SHARED\_TM**

Configures *DEFAULT\_SHARED\_TM*.

**WEBLATE\_AKISMET\_API\_KEY**

Configures the Akismet API key, see *AKISMET\_API\_KEY*.

**WEBLATE\_GPG\_IDENTITY**

Configures GPG signing of commits, see *WEBLATE\_GPG\_IDENTITY*.

Voir aussi :

*Signing Git commits with GnuPG*

**WEBLATE\_URL\_PREFIX**

Configures URL prefix where Weblate is running, see *URL\_PREFIX*.

**WEBLATE\_SILENCED\_SYSTEM\_CHECKS**

Configures checks which you do not want to be displayed, see *SILENCED\_SYSTEM\_CHECKS*.

**WEBLATE\_CSP\_SCRIPT\_SRC**

**WEBLATE\_CSP\_IMG\_SRC**

**WEBLATE\_CSP\_CONNECT\_SRC**

**WEBLATE\_CSP\_STYLE\_SRC**

**WEBLATE\_CSP\_FONT\_SRC**

Allows to customize Content-Security-Policy HTTP header.

Voir aussi :

*Content security policy*, *CSP\_SCRIPT\_SRC*, *CSP\_IMG\_SRC*, *CSP\_CONNECT\_SRC*, *CSP\_STYLE\_SRC*, *CSP\_FONT\_SRC*

**WEBLATE\_LICENSE\_FILTER**

Configure *LICENSE\_FILTER*.

**WEBLATE\_LICENSE\_REQUIRED**

Configure *LICENSE\_REQUIRED*

**WEBLATE\_WEBSITE\_REQUIRED**

Configure *WEBSITE\_REQUIRED*

**WEBLATE\_HIDE\_VERSION**

Configure *HIDE\_VERSION*.

**WEBLATE\_BASIC\_LANGUAGES**

Configure *BASIC\_LANGUAGES*.

**WEBLATE\_DEFAULT\_AUTO\_WATCH**

Configures *DEFAULT\_AUTO\_WATCH*.

**WEBLATE\_RATELIMIT\_ATTEMPTS****WEBLATE\_RATELIMIT\_LOCKOUT****WEBLATE\_RATELIMIT\_WINDOW**

Nouveau dans la version 4.6.

Configures rate limiter.

---

**Indication :** You can set configuration for any rate limiter scopes. To do that add *WEBLATE\_* prefix to any of setting described in *Limite de requêtes*.

---

**Voir aussi :**

*Limite de requêtes*, *RATELIMIT\_ATTEMPTS*, *RATELIMIT\_WINDOW*, *RATELIMIT\_LOCKOUT*

**WEBLATE\_API\_RATELIMIT\_ANON****WEBLATE\_API\_RATELIMIT\_USER**

Nouveau dans la version 4.11.

Configures API rate limiting. Defaults to 100/day for anonymous and 5000/hour for authenticated users.

**Voir aussi :**

*API rate limiting*

**WEBLATE\_ENABLE\_AVATARS**

Nouveau dans la version 4.6.1.

Configures *ENABLE\_AVATARS*.

**WEBLATE\_LIMIT\_TRANSLATION\_LENGTH\_BY\_SOURCE\_LENGTH**

Nouveau dans la version 4.9.

Configure *LIMIT\_TRANSLATION\_LENGTH\_BY\_SOURCE\_LENGTH*.

**WEBLATE\_SSH\_EXTRA\_ARGS**

Nouveau dans la version 4.9.

Configures *SSH\_EXTRA\_ARGS*.

**WEBLATE\_BORG\_EXTRA\_ARGS**

Nouveau dans la version 4.9.

Configures *BORG\_EXTRA\_ARGS*.

## Machine translation settings

---

**Indication :** Configuring API key for a service automatically configures it in *MT\_SERVICES*.

---

### **WEBLATE\_MT\_APERTIUM\_APY**

Enables *Apertium* machine translation and sets *MT\_APERTIUM\_APY*

### **WEBLATE\_MT\_AWS\_REGION**

### **WEBLATE\_MT\_AWS\_ACCESS\_KEY\_ID**

### **WEBLATE\_MT\_AWS\_SECRET\_ACCESS\_KEY**

Configures *AWS* machine translation.

```
environment:
  WEBLATE_MT_AWS_REGION: us-east-1
  WEBLATE_MT_AWS_ACCESS_KEY_ID: AKIAIOSFODNN7EXAMPLE
  WEBLATE_MT_AWS_SECRET_ACCESS_KEY: wJalrXUtnFEMI/K7MDENG/bPxRfiCYEXAMPLEKEY
```

### **WEBLATE\_MT\_DEEPL\_KEY**

Enables *DeepL* machine translation and sets *MT\_DEEPL\_KEY*

### **WEBLATE\_MT\_DEEPL\_API\_URL**

Configures *DeepL* API version to use, see *MT\_DEEPL\_API\_URL*.

### **WEBLATE\_MT\_LIBRETRANSLATE\_KEY**

Enables *LibreTranslate* machine translation and sets *MT\_LIBRETRANSLATE\_KEY*

### **WEBLATE\_MT\_LIBRETRANSLATE\_API\_URL**

Configures *LibreTranslate* API instance to use, see *MT\_LIBRETRANSLATE\_API\_URL*.

### **WEBLATE\_MT\_GOOGLE\_KEY**

Enables *Google Translate* and sets *MT\_GOOGLE\_KEY*

### **WEBLATE\_MT\_GOOGLE\_CREDENTIALS**

Enables *Google Translate API V3 (Advanced)* and sets *MT\_GOOGLE\_CREDENTIALS*

### **WEBLATE\_MT\_GOOGLE\_PROJECT**

Enables *Google Translate API V3 (Advanced)* and sets *MT\_GOOGLE\_PROJECT*

### **WEBLATE\_MT\_GOOGLE\_LOCATION**

Enables *Google Translate API V3 (Advanced)* and sets *MT\_GOOGLE\_LOCATION*

### **WEBLATE\_MT\_MICROSOFT\_COGNITIVE\_KEY**

Enables *Microsoft Cognitive Services Translator* and sets *MT\_MICROSOFT\_COGNITIVE\_KEY*

### **WEBLATE\_MT\_MICROSOFT\_ENDPOINT\_URL**

Sets *MT\_MICROSOFT\_ENDPOINT\_URL*, please note this is supposed to contain domain name only.

### **WEBLATE\_MT\_MICROSOFT\_REGION**

Sets *MT\_MICROSOFT\_REGION*

### **WEBLATE\_MT\_MICROSOFT\_BASE\_URL**

Sets *MT\_MICROSOFT\_BASE\_URL*

### **WEBLATE\_MT\_MODERNMT\_KEY**

Enables *ModernMT* and sets *MT\_MODERNMT\_KEY*.

### **WEBLATE\_MT\_MYMEMORY\_ENABLED**

Enables *MyMemory* machine translation and sets *MT\_MYMEMORY\_EMAIL* to *WEBLATE\_ADMIN\_EMAIL*.

**Exemple :**



```
environment:
  WEBLATE_MT_MYMEMORY_ENABLED: 1
```

**WEBLATE\_MT\_GLOSBE\_ENABLED**

Enables *Glosbe* machine translation.

```
environment:
  WEBLATE_MT_GLOSBE_ENABLED: 1
```

**WEBLATE\_MT\_MICROSOFT\_TERMINOLOGY\_ENABLED**

Enables *Microsoft Terminology Service* machine translation.

```
environment:
  WEBLATE_MT_MICROSOFT_TERMINOLOGY_ENABLED: 1
```

**WEBLATE\_MT\_SAP\_BASE\_URL****WEBLATE\_MT\_SAP\_SANDBOX\_APIKEY****WEBLATE\_MT\_SAP\_USERNAME****WEBLATE\_MT\_SAP\_PASSWORD****WEBLATE\_MT\_SAP\_USE\_MT**

Configures *SAP Translation Hub* machine translation.

```
environment:
  WEBLATE_MT_SAP_BASE_URL: "https://example.hana.ondemand.com/translationhub/
  ↪api/v1/"
  WEBLATE_MT_SAP_USERNAME: "user"
  WEBLATE_MT_SAP_PASSWORD: "password"
  WEBLATE_MT_SAP_USE_MT: 1
```

**Paramètres d'authentification****LDAP****WEBLATE\_AUTH\_LDAP\_SERVER\_URI****WEBLATE\_AUTH\_LDAP\_USER\_DN\_TEMPLATE****WEBLATE\_AUTH\_LDAP\_USER\_ATTR\_MAP****WEBLATE\_AUTH\_LDAP\_BIND\_DN****WEBLATE\_AUTH\_LDAP\_BIND\_PASSWORD****WEBLATE\_AUTH\_LDAP\_CONNECTION\_OPTION\_REFERRALS****WEBLATE\_AUTH\_LDAP\_USER\_SEARCH****WEBLATE\_AUTH\_LDAP\_USER\_SEARCH\_FILTER****WEBLATE\_AUTH\_LDAP\_USER\_SEARCH\_UNION****WEBLATE\_AUTH\_LDAP\_USER\_SEARCH\_UNION\_DELIMITER**

LDAP authentication configuration.

Example for direct bind :

```
environment:
  WEBLATE_AUTH_LDAP_SERVER_URI: ldap://ldap.example.org
  WEBLATE_AUTH_LDAP_USER_DN_TEMPLATE: uid=%(user)s,ou=People,dc=example,dc=net
  # map weblate 'full_name' to ldap 'name' and weblate 'email' attribute to
  ↪ 'mail' ldap attribute.
```

(suite sur la page suivante)

(suite de la page précédente)

```
# another example that can be used with OpenLDAP: 'full_name:cn,email:mail'
WEBLATE_AUTH_LDAP_USER_ATTR_MAP: full_name:name,email:mail
```

#### Example for search and bind :

```
environment:
WEBLATE_AUTH_LDAP_SERVER_URI: ldap://ldap.example.org
WEBLATE_AUTH_LDAP_BIND_DN: CN=ldap,CN=Users,DC=example,DC=com
WEBLATE_AUTH_LDAP_BIND_PASSWORD: password
WEBLATE_AUTH_LDAP_USER_ATTR_MAP: full_name:name,email:mail
WEBLATE_AUTH_LDAP_USER_SEARCH: CN=Users,DC=example,DC=com
```

#### Example for union search and bind :

```
environment:
WEBLATE_AUTH_LDAP_SERVER_URI: ldap://ldap.example.org
WEBLATE_AUTH_LDAP_BIND_DN: CN=ldap,CN=Users,DC=example,DC=com
WEBLATE_AUTH_LDAP_BIND_PASSWORD: password
WEBLATE_AUTH_LDAP_USER_ATTR_MAP: full_name:name,email:mail
WEBLATE_AUTH_LDAP_USER_SEARCH_UNION: ou=users,dc=example,
→dc=com|ou=otherusers,dc=example,dc=com
```

#### Example with search and bind against Active Directory :

```
environment:
WEBLATE_AUTH_LDAP_BIND_DN: CN=ldap,CN=Users,DC=example,DC=com
WEBLATE_AUTH_LDAP_BIND_PASSWORD: password
WEBLATE_AUTH_LDAP_SERVER_URI: ldap://ldap.example.org
WEBLATE_AUTH_LDAP_CONNECTION_OPTION_REFERRALS: 0
WEBLATE_AUTH_LDAP_USER_ATTR_MAP: full_name:name,email:mail
WEBLATE_AUTH_LDAP_USER_SEARCH: CN=Users,DC=example,DC=com
WEBLATE_AUTH_LDAP_USER_SEARCH_FILTER: (sAMAccountName=%(user)s)
```

#### Voir aussi :

*S'authentifier avec LDAP*

## GitHub

```
WEBLATE_SOCIAL_AUTH_GITHUB_KEY
WEBLATE_SOCIAL_AUTH_GITHUB_SECRET
WEBLATE_SOCIAL_AUTH_GITHUB_ORG_KEY
WEBLATE_SOCIAL_AUTH_GITHUB_ORG_SECRET
WEBLATE_SOCIAL_AUTH_GITHUB_ORG_NAME
WEBLATE_SOCIAL_AUTH_GITHUB_TEAM_KEY
WEBLATE_SOCIAL_AUTH_GITHUB_TEAM_SECRET
WEBLATE_SOCIAL_AUTH_GITHUB_TEAM_ID
```

Active *S'authentifier avec GitHub*.

## Bitbucket

`WEBLATE_SOCIAL_AUTH_BITBUCKET_KEY`

`WEBLATE_SOCIAL_AUTH_BITBUCKET_SECRET`

Active *S'authentifier avec Bitbucket*.

## Facebook

`WEBLATE_SOCIAL_AUTH_FACEBOOK_KEY`

`WEBLATE_SOCIAL_AUTH_FACEBOOK_SECRET`

Active *Facebook OAuth 2*.

## Google

`WEBLATE_SOCIAL_AUTH_GOOGLE_OAUTH2_KEY`

`WEBLATE_SOCIAL_AUTH_GOOGLE_OAUTH2_SECRET`

`WEBLATE_SOCIAL_AUTH_GOOGLE_OAUTH2_WHITELISTED_DOMAINS`

`WEBLATE_SOCIAL_AUTH_GOOGLE_OAUTH2_WHITELISTED_EMAILS`

Active *Google OAuth 2*.

## GitLab

`WEBLATE_SOCIAL_AUTH_GITLAB_KEY`

`WEBLATE_SOCIAL_AUTH_GITLAB_SECRET`

`WEBLATE_SOCIAL_AUTH_GITLAB_API_URL`

Active *GitLab OAuth 2*.

## Azure Active Directory

`WEBLATE_SOCIAL_AUTH_AZUREAD_OAUTH2_KEY`

`WEBLATE_SOCIAL_AUTH_AZUREAD_OAUTH2_SECRET`

Enables Azure Active Directory authentication, see *Active Directory Microsoft Azure*.

## Azure Active Directory with Tenant support

`WEBLATE_SOCIAL_AUTH_AZUREAD_TENANT_OAUTH2_KEY`

`WEBLATE_SOCIAL_AUTH_AZUREAD_TENANT_OAUTH2_SECRET`

`WEBLATE_SOCIAL_AUTH_AZUREAD_TENANT_OAUTH2_TENANT_ID`

Enables Azure Active Directory authentication with Tenant support, see *Active Directory Microsoft Azure*.

## Keycloak

**WEBLATE\_SOCIAL\_AUTH\_KEYCLOAK\_KEY**

**WEBLATE\_SOCIAL\_AUTH\_KEYCLOAK\_SECRET**

**WEBLATE\_SOCIAL\_AUTH\_KEYCLOAK\_PUBLIC\_KEY**

**WEBLATE\_SOCIAL\_AUTH\_KEYCLOAK\_ALGORITHM**

**WEBLATE\_SOCIAL\_AUTH\_KEYCLOAK\_AUTHORIZATION\_URL**

**WEBLATE\_SOCIAL\_AUTH\_KEYCLOAK\_ACCESS\_TOKEN\_URL**

Enables Keycloak authentication, see [documentation](#).

## Fournisseurs Linux

You can enable authentication using Linux vendors authentication services by setting following variables to any value.

**WEBLATE\_SOCIAL\_AUTH\_FEDORA**

**WEBLATE\_SOCIAL\_AUTH\_OPENSUSE**

**WEBLATE\_SOCIAL\_AUTH\_UBUNTU**

## Slack

**WEBLATE\_SOCIAL\_AUTH\_SLACK\_KEY**

**SOCIAL\_AUTH\_SLACK\_SECRET**

Enables Slack authentication, see [Slack](#).

## SAML

Self-signed SAML keys are automatically generated on first container startup. In case you want to use own keys, place the certificate and private key in `/app/data/ssl/saml.crt` and `/app/data/ssl/saml.key`.

**WEBLATE\_SAML\_IDP\_ENTITY\_ID**

**WEBLATE\_SAML\_IDP\_URL**

**WEBLATE\_SAML\_IDP\_X509CERT**

SAML Identity Provider settings, see *S'authentifier avec SAML*.

## Other authentication settings

**WEBLATE\_NO\_EMAIL\_AUTH**

Disables e-mail authentication when set to any value. See *Désactiver l'authentification par mot de passe*.

## PostgreSQL database setup

The database is created by `docker-compose.yml`, so these settings affect both Weblate and PostgreSQL containers.

**Voir aussi :**

*Database setup for Weblate*

### **POSTGRES\_PASSWORD**

Mot de passe PostgreSQL.

### **POSTGRES\_PASSWORD\_FILE**

Path to the file containing the PostgreSQL password. Use as an alternative to `POSTGRES_PASSWORD`.

### **POSTGRES\_USER**

Nom d'utilisateur PostgreSQL.

### **POSTGRES\_DATABASE**

PostgreSQL database name.

### **POSTGRES\_HOST**

PostgreSQL server hostname or IP address. Defaults to `database`.

### **POSTGRES\_PORT**

PostgreSQL server port. Defaults to none (uses the default value).

### **POSTGRES\_SSL\_MODE**

Configure how PostgreSQL handles SSL in connection to the server, for possible choices see [SSL Mode Descriptions](#)

### **POSTGRES\_ALTER\_ROLE**

Configures name of role to alter during migrations, see *Configuring Weblate to use PostgreSQL*.

### **POSTGRES\_CONN\_MAX\_AGE**

Nouveau dans la version 4.8.1.

The lifetime of a database connection, as an integer of seconds. Use 0 to close database connections at the end of each request (this is the default behavior).

Enabling connection persistence will typically, cause more open connection to the database. Please adjust your database configuration prior enabling.

Exemple de configuration :

```
environment:
  POSTGRES_CONN_MAX_AGE: 3600
```

**Voir aussi :**

`CONN_MAX_AGE`, [Connexions persistantes](#)

### **POSTGRES\_DISABLE\_SERVER\_SIDE\_CURSORS**

Nouveau dans la version 4.9.1.

Disable server side cursors in the database. This is necessary in some **pgbouncer** setups.

Exemple de configuration :

```
environment:
  POSTGRES_DISABLE_SERVER_SIDE_CURSORS: 1
```

**Voir aussi :**

`DISABLE_SERVER_SIDE_CURSORS`, [Transactions groupées et curseurs côté serveur](#)

## Database backup settings

Voir aussi :

*Données supprimées pour les sauvegardes*

### **WEBLATE\_DATABASE\_BACKUP**

Configures the daily database dump using `DATABASE_BACKUP`. Defaults to `plain`.

## Caching server setup

Using Redis is strongly recommended by Weblate and you have to provide a Redis instance when running Weblate in Docker.

Voir aussi :

*Activer la mise en cache*

### **REDIS\_HOST**

The Redis server hostname or IP address. Defaults to `cache`.

### **REDIS\_PORT**

The Redis server port. Defaults to `6379`.

### **REDIS\_DB**

The Redis database number, defaults to `1`.

### **REDIS\_PASSWORD**

The Redis server password, not used by default.

### **REDIS\_TLS**

Enables using SSL for Redis connection.

### **REDIS\_VERIFY\_SSL**

Can be used to disable SSL certificate verification for Redis connection.

## Email server setup

To make outgoing e-mail work, you need to provide a mail server.

Example TLS configuration :

```
environment:
  WEBLATE_EMAIL_HOST: smtp.example.com
  WEBLATE_EMAIL_HOST_USER: user
  WEBLATE_EMAIL_HOST_PASSWORD: pass
```

Example SSL configuration :

```
environment:
  WEBLATE_EMAIL_HOST: smtp.example.com
  WEBLATE_EMAIL_PORT: 465
  WEBLATE_EMAIL_HOST_USER: user
  WEBLATE_EMAIL_HOST_PASSWORD: pass
  WEBLATE_EMAIL_USE_TLS: 0
  WEBLATE_EMAIL_USE_SSL: 1
```

Voir aussi :

*Configuring outgoing e-mail*

### **WEBLATE\_EMAIL\_HOST**

Mail server hostname or IP address.

**Voir aussi :**

[WEBLATE\\_EMAIL\\_PORT](#), [WEBLATE\\_EMAIL\\_USE\\_SSL](#), [WEBLATE\\_EMAIL\\_USE\\_TLS](#),  
[EMAIL\\_HOST](#)

**WEBLATE\_EMAIL\_PORT**

Mail server port, defaults to 25.

**Voir aussi :**

[EMAIL\\_PORT](#)

**WEBLATE\_EMAIL\_HOST\_USER**

Utilisateur authentifié par adresse courriel.

**Voir aussi :**

[EMAIL\\_HOST\\_USER](#)

**WEBLATE\_EMAIL\_HOST\_PASSWORD**

Mot de passe d'authentification par adresse courriel.

**Voir aussi :**

[EMAIL\\_HOST\\_PASSWORD](#)

**WEBLATE\_EMAIL\_HOST\_PASSWORD\_FILE**

Path to the file containing the e-mail authentication password.

**Voir aussi :**

[WEBLATE\\_EMAIL\\_HOST\\_PASSWORD](#)

**WEBLATE\_EMAIL\_USE\_SSL**

Whether to use an implicit TLS (secure) connection when talking to the SMTP server. In most e-mail documentation, this type of TLS connection is referred to as SSL. It is generally used on port 465. If you are experiencing problems, see the explicit TLS setting [WEBLATE\\_EMAIL\\_USE\\_TLS](#).

Modifié dans la version 4.11 : The SSL/TLS support is automatically enabled based on the [WEBLATE\\_EMAIL\\_PORT](#).

**Voir aussi :**

[WEBLATE\\_EMAIL\\_PORT](#), [WEBLATE\\_EMAIL\\_USE\\_TLS](#), [EMAIL\\_USE\\_SSL](#)

**WEBLATE\_EMAIL\_USE\_TLS**

Whether to use a TLS (secure) connection when talking to the SMTP server. This is used for explicit TLS connections, generally on port 587 or 25. If you are experiencing connections that hang, see the implicit TLS setting [WEBLATE\\_EMAIL\\_USE\\_SSL](#).

Modifié dans la version 4.11 : The SSL/TLS support is automatically enabled based on the [WEBLATE\\_EMAIL\\_PORT](#).

**Voir aussi :**

[WEBLATE\\_EMAIL\\_PORT](#), [WEBLATE\\_EMAIL\\_USE\\_SSL](#), [EMAIL\\_USE\\_TLS](#)

**WEBLATE\_EMAIL\_BACKEND**

Configures Django back-end to use for sending e-mails.

**Voir aussi :**

*Configure e-mail sending*, [EMAIL\\_BACKEND](#)

**WEBLATE\_AUTO\_UPDATE**

Configures if and how Weblate should update repositories.

**Voir aussi :**

[AUTO\\_UPDATE](#)

---

**Note :** This is a Boolean setting (use "true" or "false").

---

## Site integration

**WEBLATE\_GET\_HELP\_URL**  
Configures *GET\_HELP\_URL*.

**WEBLATE\_STATUS\_URL**  
Configures *STATUS\_URL*.

**WEBLATE\_LEGAL\_URL**  
Configures *LEGAL\_URL*.

**WEBLATE\_PRIVACY\_URL**  
Configures *PRIVACY\_URL*.

## Déclaration d'erreurs

It is recommended to collect errors from the installation systematically, see *Collecting error reports*.

To enable support for Rollbar, set the following :

**ROLLBAR\_KEY**  
Your Rollbar post server access token.

**ROLLBAR\_ENVIRONMENT**  
Your Rollbar environment, defaults to `production`.

To enable support for Sentry, set following :

**SENTRY\_DSN**  
Your Sentry DSN.

**SENTRY\_ENVIRONMENT**  
Your Sentry Environment (optional).

## CDN de localisation

**WEBLATE\_LOCALIZE\_CDN\_URL**

**WEBLATE\_LOCALIZE\_CDN\_PATH**

Nouveau dans la version 4.2.1.

Configuration for *JavaScript localisation CDN*.

The *WEBLATE\_LOCALIZE\_CDN\_PATH* is path within the container. It should be stored on the persistent volume and not in the transient storage.

One of possibilities is storing that inside the Weblate data dir :

```
environment:  
  WEBLATE_LOCALIZE_CDN_URL: https://cdn.example.com/  
  WEBLATE_LOCALIZE_CDN_PATH: /app/data/l10n-cdn
```

---

**Note :** You are responsible for setting up serving of the files generated by Weblate, it only does stores the files in configured location.

---

**Voir aussi :**

weblate-cdn, *LOCALIZE\_CDN\_URL*, *LOCALIZE\_CDN\_PATH*



## Changing enabled apps, checks, add-ons or autofixes

Nouveau dans la version 3.8-5.

The built-in configuration of enabled checks, add-ons or autofixes can be adjusted by the following variables :

**WEBLATE\_ADD\_APPS**

**WEBLATE\_REMOVE\_APPS**

**WEBLATE\_ADD\_CHECK**

**WEBLATE\_REMOVE\_CHECK**

**WEBLATE\_ADD\_AUTOFIX**

**WEBLATE\_REMOVE\_AUTOFIX**

**WEBLATE\_ADD\_ADDONS**

**WEBLATE\_REMOVE\_ADDONS**

Exemple :

```
environment:
  WEBLATE_REMOVE_AUTOFIX: weblate.trans.autofixes.whitespace.
  ↪ SameBookendingWhitespace
  WEBLATE_ADD_ADDONS: customize.addons.MyAddon, customize.addons.OtherAddon
```

Voir aussi :

*CHECK\_LIST, AUTOFIX\_LIST, WEBLATE\_ADDONS, INSTALLED\_APPS*

## Paramètres du conteneur

### WEBLATE\_WORKERS

Nouveau dans la version 4.6.1.

Base number of worker processes running in the container. When not set it is determined automatically on container startup based on number of CPU cores available.

It is used to determine *CELERY\_MAIN\_OPTIONS*, *CELERY\_NOTIFY\_OPTIONS*, *CELERY\_MEMORY\_OPTIONS*, *CELERY\_TRANSLATE\_OPTIONS*, *CELERY\_BACKUP\_OPTIONS*, *CELERY\_BEAT\_OPTIONS*, and *WEB\_WORKERS*. You can use these settings to fine-tune.

**CELERY\_MAIN\_OPTIONS**

**CELERY\_NOTIFY\_OPTIONS**

**CELERY\_MEMORY\_OPTIONS**

**CELERY\_TRANSLATE\_OPTIONS**

**CELERY\_BACKUP\_OPTIONS**

**CELERY\_BEAT\_OPTIONS**

These variables allow you to adjust Celery worker options. It can be useful to adjust concurrency (`--concurrency 16`) or use different pool implementation (`--pool=gevent`).

By default, the number of concurrent workers is based on *WEBLATE\_WORKERS*.

Exemple :

```
environment:
  CELERY_MAIN_OPTIONS: --concurrency 16
```

Voir aussi :

Celery worker options, *Background tasks using Celery*

### WEB\_WORKERS

Configure how many uWSGI workers should be executed.

It defaults to `WEBLATE_WORKERS`.

**Exemple :**

```
environment:
  WEB_WORKERS: 32
```

### WEBLATE\_SERVICE

Defines which services should be executed inside the container. Use this for *Scaling horizontally*.

Following services are defined :

**celery-beat** Celery task scheduler, only one instance should be running. This container is also responsible for the database structure migrations and it should be started prior others.

**celery-backup** Celery worker for backups, only one instance should be running.

**celery-celery** Generic Celery worker.

**celery-memory** Translation memory Celery worker.

**celery-notify** Notifications Celery worker.

**celery-translate** Automatic translation Celery worker.

**web** Serveur web.

## Docker container volumes

There are two volumes (data and cache) exported by the Weblate container. The other service containers (PostgreSQL or Redis) have their data volumes as well, but those are not covered by this document.

The data volume is used to store Weblate persistent data such as cloned repositories or to customize Weblate installation.

The placement of the Docker volume on host system depends on your Docker configuration, but usually it is stored in `/var/lib/docker/volumes/weblate-docker_weblate-data/_data/` (the path consist of name of your docker-compose directory, container, and volume names). In the container it is mounted as `/app/data`.

The cache volume is mounted as `/app/cache` and is used to store static files. Its content is recreated on container startup and the volume can be mounted using ephemeral filesystem such as *tmpfs*.

When creating the volumes manually, the directories should be owned by UID 1000 as that is user used inside the container.

**Voir aussi :**

[Docker volumes documentation](#)

## Further configuration customization

You can further customize Weblate installation in the data volume, see *Docker container volumes*.

## Fichiers de configuration personnalisés

You can additionally override the configuration in `/app/data/settings-override.py` (see *Docker container volumes*). This is executed at the end of built-in settings, after all environment settings are loaded, and you can adjust or override them.

## Replacing logo and other static files

Nouveau dans la version 3.8-5.

The static files coming with Weblate can be overridden by placing into `/app/data/python/customize/static` (see [Docker container volumes](#)). For example creating `/app/data/python/customize/static/favicon.ico` will replace the favicon.

---

**Indication :** The files are copied to the corresponding location upon container startup, so a restart of Weblate is needed after changing the content of the volume.

---

This approach can be also used to override Weblate templates. For example [Mentions légales](#) documents can be placed into `/app/data/python/customize/templates/legal/documents`.

Alternatively you can also include own module (see [Personnaliser Weblate](#)) and add it as separate volume to the Docker container, for example :

```
weblate:
  volumes:
    - weblate-data:/app/data
    - ./weblate_customization/weblate_customization:/app/data/python/weblate_
      ↪ customization
  environment:
    WEBLATE_ADD_APPS: weblate_customization
```

## Ajouter ses propres modules Python

Nouveau dans la version 3.8-5.

You can place own Python modules in `/app/data/python/` (see [Docker container volumes](#)) and they can be then loaded by Weblate, most likely by using [Fichiers de configuration personnalisés](#).

**Voir aussi :**

[Personnaliser Weblate](#)

## Installation sur Debian et Ubuntu

### Exigences matérielles

Weblate should run on any contemporary hardware without problems, the following is the minimal configuration required to run Weblate on a single host (Weblate, database and webserver) :

- 2 GB of RAM
- 2 CPU cores
- 1 GB of storage space

The more memory the better - it is used for caching on all levels (filesystem, database and Weblate).

Many concurrent users increases the amount of needed CPU cores. For hundreds of translation components at least 4 GB of RAM is recommended.

The typical database storage usage is around 300 MB per 1 million hosted words. Storage space needed for cloned repositories varies, but Weblate tries to keep their size minimal by doing shallow clones.

---

**Note :** Actual requirements for your installation of Weblate vary heavily based on the size of the translations managed in it.

---

## Installation

### Exigences du système

Installez les dépendances nécessaires à la construction des modules Python (voir *Exigences logicielles*) :

```
apt install \
  libxml2-dev libxslt-dev libfreetype6-dev libjpeg-dev libz-dev libyaml-dev \
  libffi-dev libcairo-dev gir1.2-pango-1.0 libgirepository1.0-dev \
  libacl1-dev libssl-dev libpq-dev libjpeg62-turbo-dev build-essential \
  python3-gdbm python3-dev python3-pip python3-virtualenv virtualenv git
```

Install wanted optional dependencies depending on features you intend to use (see *Optional dependencies*) :

```
apt install tesseract-ocr libtesseract-dev liblibleptonica-dev
apt install libldap2-dev libldap-common libsasl2-dev
apt install libxmlsec1-dev
```

Optionally install software for running production server, see *Exécuter un serveur*, *Database setup for Weblate*, *Background tasks using Celery*. Depending on size of your installation you might want to run these components on dedicated servers.

The local installation instructions :

```
# Web server option 1: NGINX and uWSGI
apt install nginx uwsgi uwsgi-plugin-python3

# Web server option 2: Apache with ``mod_wsgi``
apt install apache2 libapache2-mod-wsgi-py3

# Caching backend: Redis
apt install redis-server

# Database server: PostgreSQL
apt install postgresql postgresql-contrib

# SMTP server
apt install exim4
```

## Modules Python

---

**Indication :** We're using virtualenv to install Weblate in a separate environment from your system. If you are not familiar with it, check virtualenv [User Guide](#).

---

1. Create the virtualenv for Weblate :

```
virtualenv --python=python3 ~/weblate-env
```

2. Activate the virtualenv for Weblate :

```
. ~/weblate-env/bin/activate
```

3. Install Weblate including all optional dependencies :

```
pip install "Weblate[all]"
```

Please check *Optional dependencies* for fine-tuning of optional dependencies.

---

**Note :** On some Linux distributions running Weblate fails with libffi error :

```
ffi_prep_closure(): bad user_data (it seems that the version of the libffi_
↳library seen at runtime is different from the 'ffi.h' file seen at compile-
↳time)
```

This is caused by incompatibility of binary packages distributed via PyPI with the distribution. To address this, you need to rebuild the package on your system :

```
pip install --force-reinstall --no-binary :all: cffi
```

## Configurer Weblate

**Note :** Following steps assume virtualenv used by Weblate is active (what can be done by `. ~/weblate-env/bin/activate`). In case this is not true, you will have to specify full path to **weblate** command as `~/weblate-env/bin/weblate`.

1. Copy the file `~/weblate-env/lib/python3.7/site-packages/weblate/settings_example.py` to `~/weblate-env/lib/python3.7/site-packages/weblate/settings.py`.
2. Adjust the values in the new `settings.py` file to your liking. You will need to provide at least the database credentials and Django secret key, but you will want more changes for production setup, see [Ajuster la configuration](#).
3. Create the database and its structure for Weblate (the example settings use PostgreSQL, check [Database setup for Weblate](#) for production ready setup) :

```
weblate migrate
```

4. Create the administrator user account and copy the password it outputs to the clipboard, and also save it for later use :

```
weblate createadmin
```

5. Collect static files for web server (see [Exécuter un serveur](#) and [Serving static files](#)) :

```
weblate collectstatic
```

6. Compress JavaScript and CSS files (optional, see [Compressing client assets](#)) :

```
weblate compress
```

7. Start Celery workers. This is not necessary for development purposes, but strongly recommended otherwise. See [Background tasks using Celery](#) for more info :

```
~/weblate-env/lib/python3.7/site-packages/weblate/examples/celery start
```

8. Start the development server (see [Exécuter un serveur](#) for production setup) :

```
weblate runserver
```

## Après installation

Congratulations, your Weblate server is now running and you can start using it.

- You can now access Weblate on `http://localhost:8000/`.
- Sign in with admin credentials obtained during installation or register with new users.
- You can now run Weblate commands using **weblate** command when Weblate virtualenv is active, see *Commandes de gestion*.
- You can stop the test server with Ctrl+C.
- Review potential issues with your installation either on `/manage/performance/` URL (see *Interface de gestion*) or using **weblate check --deploy**, see *Configuration de production*.

## Ajouter une traduction

1. Open the admin interface (`http://localhost:8000/create/project/`) and create the project you want to translate. See *Configuration du projet* for more details.  
All you need to specify here is the project name and its website.
2. Create a component which is the real object for translation - it points to the VCS repository, and selects which files to translate. See *Configuration des composants* for more details.  
The important fields here are : *Nom du composant*, *Dépôt du code source*, and *Masque de fichier* for finding translatable files. Weblate supports a wide range of formats including *GNU gettext*, *Android string resources*, *Apple iOS strings*, *Java properties*, *Stringsdict format* or *Fluent format*, see *Formats de fichiers pris en charge* for more details.
3. Once the above is completed (it can be lengthy process depending on the size of your VCS repository, and number of messages to translate), you can start translating.

## Installation sur SUSE et openSUSE

### Exigences matérielles

Weblate should run on any contemporary hardware without problems, the following is the minimal configuration required to run Weblate on a single host (Weblate, database and webserver) :

- 2 GB of RAM
- 2 CPU cores
- 1 GB of storage space

The more memory the better - it is used for caching on all levels (filesystem, database and Weblate).

Many concurrent users increases the amount of needed CPU cores. For hundreds of translation components at least 4 GB of RAM is recommended.

The typical database storage usage is around 300 MB per 1 million hosted words. Storage space needed for cloned repositories varies, but Weblate tries to keep their size minimal by doing shallow clones.

---

**Note :** Actual requirements for your installation of Weblate vary heavily based on the size of the translations managed in it.

---

## Installation

### Exigences du système

Installez les dépendances nécessaires à la construction des modules Python (voir [Exigences logicielles](#)) :

```
zypper install \
  libxslt-devel libxml2-devel freetype-devel libjpeg-devel zlib-devel \
  libyaml-devel libffi-devel cairo-devel pango-devel \
  gobject-introspection-devel libacl-devel python3-pip python3-virtualenv \
  python3-devel git
```

Install wanted optional dependencies depending on features you intend to use (see [Optional dependencies](#)) :

```
zypper install tesseract-ocr tesseract-devel leptonica-devel
zypper install libldap2-devel libsasl2-devel
zypper install libxmlsec1-devel
```

Optionally install software for running production server, see [Exécuter un serveur](#), [Database setup for Weblate](#), [Background tasks using Celery](#). Depending on size of your installation you might want to run these components on dedicated servers.

The local installation instructions :

```
# Web server option 1: NGINX and uWSGI
zypper install nginx uwsgi uwsgi-plugin-python3

# Web server option 2: Apache with ``mod_wsgi``
zypper install apache2 apache2-mod_wsgi

# Caching backend: Redis
zypper install redis-server

# Database server: PostgreSQL
zypper install postgresql postgresql-contrib

# SMTP server
zypper install postfix
```

## Modules Python

**Indication :** We're using virtualenv to install Weblate in a separate environment from your system. If you are not familiar with it, check virtualenv [User Guide](#).

1. Create the virtualenv for Weblate :

```
virtualenv --python=python3 ~/weblate-env
```

2. Activate the virtualenv for Weblate :

```
. ~/weblate-env/bin/activate
```

3. Install Weblate including all optional dependencies :

```
pip install "Weblate[all]"
```

Please check [Optional dependencies](#) for fine-tuning of optional dependencies.

**Note :** On some Linux distributions running Weblate fails with libffi error :

```
ffi_prep_closure(): bad user_data (it seems that the version of the libffi_
↪library seen at runtime is different from the 'ffi.h' file seen at compile-
↪time)
```

This is caused by incompatibility of binary packages distributed via PyPI with the distribution. To address this, you need to rebuild the package on your system :

```
pip install --force-reinstall --no-binary :all: cffi
```

---

### Configurer Weblate

---

**Note :** Following steps assume virtualenv used by Weblate is active (what can be done by `. ~/weblate-env/bin/activate`). In case this is not true, you will have to specify full path to **weblate** command as `~/weblate-env/bin/weblate`.

---

1. Copy the file `~/weblate-env/lib/python3.7/site-packages/weblate/settings_example.py` to `~/weblate-env/lib/python3.7/site-packages/weblate/settings.py`.
2. Adjust the values in the new `settings.py` file to your liking. You will need to provide at least the database credentials and Django secret key, but you will want more changes for production setup, see [Ajuster la configuration](#).
3. Create the database and its structure for Weblate (the example settings use PostgreSQL, check [Database setup for Weblate](#) for production ready setup) :

```
weblate migrate
```

4. Create the administrator user account and copy the password it outputs to the clipboard, and also save it for later use :

```
weblate createadmin
```

5. Collect static files for web server (see [Exécuter un serveur](#) and [Serving static files](#)) :

```
weblate collectstatic
```

6. Compress JavaScript and CSS files (optional, see [Compressing client assets](#)) :

```
weblate compress
```

7. Start Celery workers. This is not necessary for development purposes, but strongly recommended otherwise. See [Background tasks using Celery](#) for more info :

```
~/weblate-env/lib/python3.7/site-packages/weblate/examples/celery start
```

8. Start the development server (see [Exécuter un serveur](#) for production setup) :

```
weblate runserver
```



## Après installation

Congratulations, your Weblate server is now running and you can start using it.

- You can now access Weblate on `http://localhost:8000/`.
- Sign in with admin credentials obtained during installation or register with new users.
- You can now run Weblate commands using **weblate** command when Weblate virtualenv is active, see *Commandes de gestion*.
- You can stop the test server with Ctrl+C.
- Review potential issues with your installation either on `/manage/performance/` URL (see *Interface de gestion*) or using **weblate check --deploy**, see *Configuration de production*.

## Ajouter une traduction

1. Open the admin interface (`http://localhost:8000/create/project/`) and create the project you want to translate. See *Configuration du projet* for more details.  
All you need to specify here is the project name and its website.
2. Create a component which is the real object for translation - it points to the VCS repository, and selects which files to translate. See *Configuration des composants* for more details.  
The important fields here are : *Nom du composant*, *Dépôt du code source*, and *Masque de fichier* for finding translatable files. Weblate supports a wide range of formats including *GNU gettext*, *Android string resources*, *Apple iOS strings*, *Java properties*, *Stringsdict format* or *Fluent format*, see *Formats de fichiers pris en charge* for more details.
3. Once the above is completed (it can be lengthy process depending on the size of your VCS repository, and number of messages to translate), you can start translating.

## Installing on RedHat, Fedora and CentOS

### Exigences matérielles

Weblate should run on any contemporary hardware without problems, the following is the minimal configuration required to run Weblate on a single host (Weblate, database and webserver) :

- 2 GB of RAM
- 2 CPU cores
- 1 GB of storage space

The more memory the better - it is used for caching on all levels (filesystem, database and Weblate).

Many concurrent users increases the amount of needed CPU cores. For hundreds of translation components at least 4 GB of RAM is recommended.

The typical database storage usage is around 300 MB per 1 million hosted words. Storage space needed for cloned repositories varies, but Weblate tries to keep their size minimal by doing shallow clones.

---

**Note :** Actual requirements for your installation of Weblate vary heavily based on the size of the translations managed in it.

---

## Installation

### Exigences du système

Installez les dépendances nécessaires à la construction des modules Python (voir *Exigences logicielles*) :

```
dnf install \
    libxslt-devel libxml2-devel freetype-devel libjpeg-devel zlib-devel \
    libyaml-devel libffi-devel cairo-devel pango-devel \
    gobject-introspection-devel libacl-devel python3-pip python3-virtualenv \
    python3-devel git
```

Install wanted optional dependencies depending on features you intend to use (see *Optional dependencies*) :

```
dnf install tesseract-langpack-eng tesseract-devel leptonica-devel
dnf install libldap2-devel libsasl2-devel
dnf install libxmlsec1-devel
```

Optionally install software for running production server, see *Exécuter un serveur*, *Database setup for Weblate*, *Background tasks using Celery*. Depending on size of your installation you might want to run these components on dedicated servers.

The local installation instructions :

```
# Web server option 1: NGINX and uWSGI
dnf install nginx uwsgi uwsgi-plugin-python3

# Web server option 2: Apache with ``mod_wsgi``
dnf install apache2 apache2-mod_wsgi

# Caching backend: Redis
dnf install redis

# Database server: PostgreSQL
dnf install postgresql postgresql-contrib

# SMTP server
dnf install postfix
```

## Modules Python

---

**Indication :** We're using virtualenv to install Weblate in a separate environment from your system. If you are not familiar with it, check virtualenv [User Guide](#).

---

1. Create the virtualenv for Weblate :

```
virtualenv --python=python3 ~/weblate-env
```

2. Activate the virtualenv for Weblate :

```
. ~/weblate-env/bin/activate
```

3. Install Weblate including all optional dependencies :

```
pip install "Weblate[all]"
```

Please check *Optional dependencies* for fine-tuning of optional dependencies.

---

**Note :** On some Linux distributions running Weblate fails with libffi error :

```
ffi_prep_closure(): bad user_data (it seems that the version of the libffi_
↳library seen at runtime is different from the 'ffi.h' file seen at compile-
↳time)
```

This is caused by incompatibility of binary packages distributed via PyPI with the distribution. To address this, you need to rebuild the package on your system :

```
pip install --force-reinstall --no-binary :all: cffi
```

## Configurer Weblate

**Note :** Following steps assume virtualenv used by Weblate is active (what can be done by `. ~/weblate-env/bin/activate`). In case this is not true, you will have to specify full path to **weblate** command as `~/weblate-env/bin/weblate`.

1. Copy the file `~/weblate-env/lib/python3.7/site-packages/weblate/settings_example.py` to `~/weblate-env/lib/python3.7/site-packages/weblate/settings.py`.
2. Adjust the values in the new `settings.py` file to your liking. You will need to provide at least the database credentials and Django secret key, but you will want more changes for production setup, see [Ajuster la configuration](#).
3. Create the database and its structure for Weblate (the example settings use PostgreSQL, check [Database setup for Weblate](#) for production ready setup) :

```
weblate migrate
```

4. Create the administrator user account and copy the password it outputs to the clipboard, and also save it for later use :

```
weblate createadmin
```

5. Collect static files for web server (see [Exécuter un serveur](#) and [Serving static files](#)) :

```
weblate collectstatic
```

6. Compress JavaScript and CSS files (optional, see [Compressing client assets](#)) :

```
weblate compress
```

7. Start Celery workers. This is not necessary for development purposes, but strongly recommended otherwise. See [Background tasks using Celery](#) for more info :

```
~/weblate-env/lib/python3.7/site-packages/weblate/examples/celery start
```

8. Start the development server (see [Exécuter un serveur](#) for production setup) :

```
weblate runserver
```

## Après installation

Congratulations, your Weblate server is now running and you can start using it.

- You can now access Weblate on `http://localhost:8000/`.
- Sign in with admin credentials obtained during installation or register with new users.
- You can now run Weblate commands using **weblate** command when Weblate virtualenv is active, see *Commandes de gestion*.
- You can stop the test server with Ctrl+C.
- Review potential issues with your installation either on `/manage/performance/` URL (see *Interface de gestion*) or using **weblate check --deploy**, see *Configuration de production*.

## Ajouter une traduction

1. Open the admin interface (`http://localhost:8000/create/project/`) and create the project you want to translate. See *Configuration du projet* for more details.  
All you need to specify here is the project name and its website.
2. Create a component which is the real object for translation - it points to the VCS repository, and selects which files to translate. See *Configuration des composants* for more details.  
The important fields here are : *Nom du composant*, *Dépôt du code source*, and *Masque de fichier* for finding translatable files. Weblate supports a wide range of formats including *GNU gettext*, *Android string resources*, *Apple iOS strings*, *Java properties*, *Stringsdict format* or *Fluent format*, see *Formats de fichiers pris en charge* for more details.
3. Once the above is completed (it can be lengthy process depending on the size of your VCS repository, and number of messages to translate), you can start translating.

## Installing on macOS

### Exigences matérielles

Weblate should run on any contemporary hardware without problems, the following is the minimal configuration required to run Weblate on a single host (Weblate, database and webserver) :

- 2 GB of RAM
- 2 CPU cores
- 1 GB of storage space

The more memory the better - it is used for caching on all levels (filesystem, database and Weblate).

Many concurrent users increases the amount of needed CPU cores. For hundreds of translation components at least 4 GB of RAM is recommended.

The typical database storage usage is around 300 MB per 1 million hosted words. Storage space needed for cloned repositories varies, but Weblate tries to keep their size minimal by doing shallow clones.

---

**Note :** Actual requirements for your installation of Weblate vary heavily based on the size of the translations managed in it.

---

## Installation

### Exigences du système

Installez les dépendances nécessaires à la construction des modules Python (voir *Exigences logicielles*) :

```
brew install python pango cairo gobject-introspection libffi glib libyaml
pip3 install virtualenv
```

Make sure pip will be able to find the libffi version provided by homebrew — this will be needed during the installation build step.

```
export PKG_CONFIG_PATH="/usr/local/opt/libffi/lib/pkgconfig"
```

Install wanted optional dependencies depending on features you intend to use (see *Optional dependencies*) :

```
brew install tesseract
```

Optionally install software for running production server, see *Exécuter un serveur*, *Database setup for Weblate*, *Background tasks using Celery*. Depending on size of your installation you might want to run these components on dedicated servers.

The local installation instructions :

```
# Web server option 1: NGINX and uWSGI
brew install nginx uwsgi

# Web server option 2: Apache with ``mod_wsgi``
brew install httpd

# Caching backend: Redis
brew install redis

# Database server: PostgreSQL
brew install postgresql
```

## Modules Python

**Indication :** We're using virtualenv to install Weblate in a separate environment from your system. If you are not familiar with it, check virtualenv [User Guide](#).

1. Create the virtualenv for Weblate :

```
virtualenv --python=python3 ~/weblate-env
```

2. Activate the virtualenv for Weblate :

```
. ~/weblate-env/bin/activate
```

3. Install Weblate including all optional dependencies :

```
pip install "Weblate[all]"
```

Please check *Optional dependencies* for fine-tuning of optional dependencies.

**Note :** On some Linux distributions running Weblate fails with libffi error :

```
ffi_prep_closure(): bad user_data (it seems that the version of the libffi_
↪library seen at runtime is different from the 'ffi.h' file seen at compile-
↪time)
```

This is caused by incompatibility of binary packages distributed via PyPI with the distribution. To address this, you need to rebuild the package on your system :

```
pip install --force-reinstall --no-binary :all: cffi
```

---

## Configurer Weblate

---

**Note :** Following steps assume virtualenv used by Weblate is active (what can be done by `. ~/weblate-env/bin/activate`). In case this is not true, you will have to specify full path to **weblate** command as `~/weblate-env/bin/weblate`.

---

1. Copy the file `~/weblate-env/lib/python3.7/site-packages/weblate/settings_example.py` to `~/weblate-env/lib/python3.7/site-packages/weblate/settings.py`.
2. Adjust the values in the new `settings.py` file to your liking. You will need to provide at least the database credentials and Django secret key, but you will want more changes for production setup, see [Ajuster la configuration](#).
3. Create the database and its structure for Weblate (the example settings use PostgreSQL, check [Database setup for Weblate](#) for production ready setup) :

```
weblate migrate
```

4. Create the administrator user account and copy the password it outputs to the clipboard, and also save it for later use :

```
weblate createadmin
```

5. Collect static files for web server (see [Exécuter un serveur](#) and [Serving static files](#)) :

```
weblate collectstatic
```

6. Compress JavaScript and CSS files (optional, see [Compressing client assets](#)) :

```
weblate compress
```

7. Start Celery workers. This is not necessary for development purposes, but strongly recommended otherwise. See [Background tasks using Celery](#) for more info :

```
~/weblate-env/lib/python3.7/site-packages/weblate/examples/celery start
```

8. Start the development server (see [Exécuter un serveur](#) for production setup) :

```
weblate runserver
```

## Après installation

Congratulations, your Weblate server is now running and you can start using it.

- You can now access Weblate on `http://localhost:8000/`.
- Sign in with admin credentials obtained during installation or register with new users.
- You can now run Weblate commands using **weblate** command when Weblate virtualenv is active, see *Commandes de gestion*.
- You can stop the test server with Ctrl+C.
- Review potential issues with your installation either on `/manage/performance/` URL (see *Interface de gestion*) or using **weblate check --deploy**, see *Configuration de production*.

## Ajouter une traduction

1. Open the admin interface (`http://localhost:8000/create/project/`) and create the project you want to translate. See *Configuration du projet* for more details.  
All you need to specify here is the project name and its website.
2. Create a component which is the real object for translation - it points to the VCS repository, and selects which files to translate. See *Configuration des composants* for more details.  
The important fields here are : *Nom du composant*, *Dépôt du code source*, and *Masque de fichier* for finding translatable files. Weblate supports a wide range of formats including *GNU gettext*, *Android string resources*, *Apple iOS strings*, *Java properties*, *Stringsdict format* or *Fluent format*, see *Formats de fichiers pris en charge* for more details.
3. Once the above is completed (it can be lengthy process depending on the size of your VCS repository, and number of messages to translate), you can start translating.

## Installing from sources

1. Please follow the installation instructions for your system first :
  - *Installation sur Debian et Ubuntu*
  - *Installation sur SUSE et openSUSE*
  - *Installing on RedHat, Fedora and CentOS*
2. Grab the latest Weblate sources using Git (or download a tarball and unpack that) :

```
git clone https://github.com/WeblateOrg/weblate.git weblate-src
```

Alternatively you can use released archives. You can download them from our website <<https://weblate.org/>>. Those downloads are cryptographically signed, please see *Verifying release signatures*.

3. Install current Weblate code into the virtualenv :

```
. ~/weblate-env/bin/activate
pip install -e weblate-src
```

4. Copy `weblate/settings_example.py` to `weblate/settings.py`.
5. Adjust the values in the new `settings.py` file to your liking. You will need to provide at least the database credentials and Django secret key, but you will want more changes for production setup, see *Ajuster la configuration*.
6. Create the database used by Weblate, see *Database setup for Weblate*.
7. Build Django tables, static files and initial data (see *Filling up the database* and *Serving static files*) :

```
weblate migrate
weblate collectstatic
weblate compress
```

**Note :** This step should be repeated whenever you update the repository.

### Installing on OpenShift

With the OpenShift Weblate template you can get your personal Weblate instance up and running in seconds. All of Weblate's dependencies are already included. PostgreSQL is set up as the default database and persistent volume claims are used.

You can find the template at <https://github.com/WeblateOrg/openshift/>.

### Installation

The following examples assume you have a working OpenShift v3.x environment, with `oc` client tool installed. Please check the OpenShift documentation for instructions.

The `template.yml` is suited for running all components in OpenShift. There is also `template-external-postgresql.yml` which does not start a PostgreSQL server and allows you to configure external PostgreSQL server.

### Web Console

Copy the raw content from [template.yml](#) and import them into your project, then use the `Create` button in the OpenShift web console to create your application. The web console will prompt you for the values for all of the parameters used by the template.

### CLI

To upload the Weblate template to your current project's template library, pass the `template.yml` file with the following command :

```
$ oc create -f https://raw.githubusercontent.com/WeblateOrg/openshift/main/  
↪template.yml \  
-n <PROJECT>
```

The template is now available for selection using the web console or the CLI.

### Paramètres

The parameters that you can override are listed in the parameters section of the template. You can list them with the CLI by using the following command and specifying the file to be used :

```
$ oc process --parameters -f https://raw.githubusercontent.com/WeblateOrg/  
↪openshift/main/template.yml  
  
# If the template is already uploaded  
$ oc process --parameters -n <PROJECT> weblate
```



## Appvisionnement

You can also use the CLI to process templates and use the configuration that is generated to create objects immediately.

```
$ oc process -f https://raw.githubusercontent.com/WeblateOrg/openshift/main/
→template.yml \
  -p APPLICATION_NAME=weblate \
  -p WEBLATE_VERSION=4.3.1-1 \
  -p WEBLATE_SITE_DOMAIN=weblate.app-openshift.example.com \
  -p POSTGRESQL_IMAGE=docker-registry.default.svc:5000/openshift/postgresql:9.6 \
  -p REDIS_IMAGE=docker-registry.default.svc:5000/openshift/redis:3.2 \
  | oc create -f
```

The Weblate instance should be available after successful migration and deployment at the specified WEBLATE\_SITE\_DOMAIN parameter.

After container setup, you can sign in as *admin* user with password provided in WEBLATE\_ADMIN\_PASSWORD, or a random password generated on first start if that was not set.

To reset *admin* password, restart the container with WEBLATE\_ADMIN\_PASSWORD set to new password in the respective Secret.

## Éliminer

```
$ oc delete all -l app=<APPLICATION_NAME>
$ oc delete configmap -l app= <APPLICATION_NAME>
$ oc delete secret -l app=<APPLICATION_NAME>
# ATTENTION! The following command is only optional and will permanently delete
→all of your data.
$ oc delete pvc -l app=<APPLICATION_NAME>

$ oc delete all -l app=weblate \
  && oc delete secret -l app=weblate \
  && oc delete configmap -l app=weblate \
  && oc delete pvc -l app=weblate
```

## Configuration

By processing the template a respective ConfigMap will be created and which can be used to customize the Weblate image. The ConfigMap is directly mounted as environment variables and triggers a new deployment every time it is changed. For further configuration options, see *Docker environment variables* for full list of environment variables.

## Installing on Kubernetes

---

**Note :** This guide is looking for contributors experienced with Kubernetes to cover the setup in more details.

---

With the Kubernetes Helm chart you can get your personal Weblate instance up and running in seconds. All of Weblate's dependencies are already included. PostgreSQL is set up as the default database and persistent volume claims are used.

You can find the chart at <https://github.com/WeblateOrg/helm/> and it can be displayed at <https://artifacthub.io/packages/helm/weblate/weblate>.

## Installation

```
helm repo add weblate https://helm.weblate.org
helm install my-release weblate/weblate
```

## Configuration

For further configuration options, see *Docker environment variables* for full list of environment variables.

Depending on your setup and experience, choose an appropriate installation method for you :

- *Installing using Docker*, recommandé pour les configurations de production.
- Virtualenv installation, recommended for production setups :
  - *Installation sur Debian et Ubuntu*
  - *Installation sur SUSE et openSUSE*
  - *Installing on RedHat, Fedora and CentOS*
  - *Installing on macOS*
- *Installing from sources*, recommandé pour le développement.
- *Installing on OpenShift*
- *Installing on Kubernetes*

### 2.1.2 Exigences logicielles

#### Système d'exploitation

Weblate est connu pour fonctionner sous Linux, FreeBSD et macOS. D'autres systèmes de type Unix fonctionneront très probablement aussi.

Weblate is not supported on Windows. But it may still work and patches are happily accepted.

#### Autres services

Weblate is using other services for its operation. You will need at least following services running :

- PostgreSQL database server, see *Database setup for Weblate*.
- Redis server for cache and tasks queue, see *Background tasks using Celery*.
- SMTP server for outgoing e-mail, see *Configuring outgoing e-mail*.

#### Dépendances python

Weblate is written in [Python](#) and supports Python 3.6 or newer. You can install dependencies using pip or from your distribution packages, full list is available in `requirements.txt`.

Most notable dependencies :

**Django** <https://www.djangoproject.com/>  
**Celery** <https://docs.celeryproject.org/>  
**Translate Toolkit** <https://toolkit.translatehouse.org/>  
**translation-finder** <https://github.com/WeblateOrg/translation-finder>  
**Python Social Auth** <https://python-social-auth.readthedocs.io/>  
**Django REST Framework** <https://www.django-rest-framework.org/>

## Optional dependencies

Les modules suivants sont nécessaires pour certaines fonctionnalités de Weblate. Vous pouvez les trouver tous dans `requirements-optional.txt`.

**Mercurial** (optional for *Mercurial* repositories support) <https://www.mercurial-scm.org/>  
**phply** (optional for *Chaînes de caractères PHP*) <https://github.com/viraptor/phply>  
**tesseract** (optional for OCR in *Visual context for strings*) <https://github.com/sirfz/tesseract>  
**python-akismet** (optional for *Protection contre le spam*) <https://github.com/Nekmo/python-akismet>  
**ruamel.yaml** (facultatif pour *YAML files*) <https://pypi.org/project/ruamel.yaml/>  
**Zeep** (facultatif pour *Microsoft Terminology Service*) <https://docs.python-zeep.org/>  
**aeidon** (facultatif pour *Subtitle files*) <https://pypi.org/project/aeidon/>  
**fluent.syntax** (optional for *Fluent format*) <https://projectfluent.org/>

**Indication :** When installing using pip, you can directly specify desired features when installing :

```
pip install "Weblate[PHP,Fluent]"
```

Or you can install Weblate with all optional features :

```
pip install "Weblate[all]"
```

Or you can install Weblate without any optional features :

```
pip install Weblate
```

## Database backend dependencies

Weblate supports PostgreSQL, MySQL and MariaDB, see *Database setup for Weblate* and backends documentation for more details.

## Autres exigences système requises

The following dependencies have to be installed on the system :

**Git** <https://git-scm.com/>  
**Pango, Cairo and related header files and gir introspection data** <https://cairographics.org/>, <https://pango.gnome.org/>, see *Pango and Cairo*  
**git-review** (facultatif pour la prise en charge de Gerrit) <https://pypi.org/project/git-review/>  
**git-svn** (facultatif pour la prise en charge de Subversion) <https://git-scm.com/docs/git-svn>  
**tesseract** et ses données (facultatif pour la ROC des captures d'écran) <https://github.com/tesseract-ocr/tesseract>  
**licensee** (facultatif pour la détection des licences lors de la création des composants) <https://github.com/licensee/licensee>

## Build-time dependencies

To build some of the *Dépendances python* you might need to install their dependencies. This depends on how you install them, so please consult individual packages for documentation. You won't need those if using prebuilt wheels while installing using `pip` or when you use distribution packages.

## Pango and Cairo

Modifié dans la version 3.7.

Weblate uses Pango and Cairo for rendering bitmap widgets (see *promotion*) and rendering checks (see *Gestion des polices*). To properly install Python bindings for those you need to install system libraries first - you need both Cairo and Pango, which in turn need GLib. All those should be installed with development files and GObject introspection data.

### 2.1.3 Verifying release signatures

Weblate release are cryptographically signed by the releasing developer. Currently this is Michal Čihař. Fingerprint of his PGP key is :

```
63CB 1DF1 EF12 CF2A C0EE 5A32 9C27 B313 42B7 511D
```

and you can get more identification information from <<https://keybase.io/nijel>>.

You should verify that the signature matches the archive you have downloaded. This way you can be sure that you are using the same code that was released. You should also verify the date of the signature to make sure that you downloaded the latest version.

Each archive is accompanied with `.asc` files which contain the PGP signature for it. Once you have both of them in the same folder, you can verify the signature :

```
$ gpg --verify Weblate-3.5.tar.xz.asc
gpg: assuming signed data in 'Weblate-3.5.tar.xz'
gpg: Signature made Ne 3. března 2019, 16:43:15 CET
gpg:          using RSA key 87E673AF83F6C3A0C344C8C3F4AA229D4D58C245
gpg: Can't check signature: public key not found
```

As you can see GPG complains that it does not know the public key. At this point you should do one of the following steps :

— Use *wkd* to download the key :

```
$ gpg --auto-key-locate wkd --locate-keys michal@cihar.com
pub   rsa4096 2009-06-17 [SC]
      63CB1DF1EF12CF2AC0EE5A329C27B31342B7511D
uid   [ultimate] Michal Čihař <michal@cihar.com>
uid   [ultimate] Michal Čihař <nijel@debian.org>
uid   [ultimate] [jpeg image of size 8848]
uid   [ultimate] Michal Čihař (Braiiins) <michal.cihar@braiins.cz>
sub   rsa4096 2009-06-17 [E]
sub   rsa4096 2015-09-09 [S]
```

— Download the keyring from *Michal's server*, then import it with :

```
$ gpg --import wmxth3chu9jfxdxywj1skpmhsj311mzm
```

— Download and import the key from one of the key servers :

```
$ gpg --keyserver hkp://pgp.mit.edu --recv-keys 87E673AF83F6C3A0C344C8C3F4AA229D4D58C245
gpg: key 9C27B31342B7511D: "Michal Čihař <michal@cihar.com>" imported
gpg: Total number processed: 1
gpg:                unchanged: 1
```

This will improve the situation a bit - at this point you can verify that the signature from the given key is correct but you still can not trust the name used in the key :

```
$ gpg --verify Weblate-3.5.tar.xz.asc
gpg: assuming signed data in 'Weblate-3.5.tar.xz'
gpg: Signature made Ne 3. března 2019, 16:43:15 CET
gpg:                using RSA key 87E673AF83F6C3A0C344C8C3F4AA229D4D58C245
gpg: Good signature from "Michal Čihař <michal@cihar.com>" [ultimate]
gpg:                aka "Michal Čihař <nijel@debian.org>" [ultimate]
gpg:                aka "[jpeg image of size 8848]" [ultimate]
gpg:                aka "Michal Čihař (Brains) <michal.cihar@brains.cz>" [ultimate]
gpg: WARNING: This key is not certified with a trusted signature!
gpg:                There is no indication that the signature belongs to the owner.
Primary key fingerprint: 63CB 1DF1 EF12 CF2A C0EE  5A32 9C27 B313 42B7 511D
```

The problem here is that anybody could issue the key with this name. You need to ensure that the key is actually owned by the mentioned person. The GNU Privacy Handbook covers this topic in the chapter [Validating other keys on your public keyring](#). The most reliable method is to meet the developer in person and exchange key fingerprints, however you can also rely on the web of trust. This way you can trust the key transitively through signatures of others, who have met the developer in person.

Once the key is trusted, the warning will not occur :

```
$ gpg --verify Weblate-3.5.tar.xz.asc
gpg: assuming signed data in 'Weblate-3.5.tar.xz'
gpg: Signature made Sun Mar  3 16:43:15 2019 CET
gpg:                using RSA key 87E673AF83F6C3A0C344C8C3F4AA229D4D58C245
gpg: Good signature from "Michal Čihař <michal@cihar.com>" [ultimate]
gpg:                aka "Michal Čihař <nijel@debian.org>" [ultimate]
gpg:                aka "[jpeg image of size 8848]" [ultimate]
gpg:                aka "Michal Čihař (Brains) <michal.cihar@brains.cz>" [ultimate]
```

Should the signature be invalid (the archive has been changed), you would get a clear error regardless of the fact that the key is trusted or not :

```
$ gpg --verify Weblate-3.5.tar.xz.asc
gpg: Signature made Sun Mar  3 16:43:15 2019 CET
gpg:                using RSA key 87E673AF83F6C3A0C344C8C3F4AA229D4D58C245
gpg: BAD signature from "Michal Čihař <michal@cihar.com>" [ultimate]
```

## 2.1.4 Permissions du système de fichiers

The Weblate process needs to be able to read and write to the directory where it keeps data - `DATA_DIR`. All files within this directory should be owned and writable by the user running all Weblate processes (typically WSGI and Celery, see [Exécuter un serveur](#) and [Background tasks using Celery](#)).

The default configuration places them in the same tree as the Weblate sources, however you might prefer to move these to a better location such as `/var/lib/weblate`.

Weblate tries to create these directories automatically, but it will fail when it does not have permissions to do so.

You should also take care when running [Commandes de gestion](#), as they should be ran under the same user as Weblate itself is running, otherwise permissions on some files might be wrong.

In the Docker container, all files in the `/app/data` volume have to be owned by the `weblate` user inside the container (UID 1000).

**Voir aussi :**

*Serving static files*

### 2.1.5 Database setup for Weblate

It is recommended to run Weblate with a PostgreSQL database server.

**Voir aussi :**

*Use a powerful database engine, Bases de données, Migrating from other databases to PostgreSQL*

#### PostgreSQL

PostgreSQL is usually the best choice for Django-based sites. It's the reference database used for implementing Django database layer.

---

**Note :** Weblate uses trigram extension which has to be installed separately in some cases. Look for `postgresql-contrib` or a similarly named package.

---

**Voir aussi :**

*Notes sur PostgreSQL*

#### Creating a database in PostgreSQL

It is usually a good idea to run Weblate in a separate database, and separate user account :

```
# If PostgreSQL was not installed before, set the main password
sudo -u postgres psql postgres -c "\password postgres"

# Create a database user called "weblate"
sudo -u postgres createuser --superuser --pwprompt weblate

# Create the database "weblate" owned by "weblate"
sudo -u postgres createdb -E UTF8 -O weblate weblate
```

---

**Indication :** If you don't want to make the Weblate user a superuser in PostgreSQL, you can omit that. In that case you will have to perform some of the migration steps manually as a PostgreSQL superuser in schema Weblate will use :

```
CREATE EXTENSION IF NOT EXISTS pg_trgm WITH SCHEMA weblate;
```

---

## Configuring Weblate to use PostgreSQL

The `settings.py` snippet for PostgreSQL :

```
DATABASES = {
    "default": {
        # Database engine
        "ENGINE": "django.db.backends.postgresql",
        # Database name
        "NAME": "weblate",
        # Database user
        "USER": "weblate",
        # Name of role to alter to set parameters in PostgreSQL,
        # use in case role name is different than user used for authentication.
        # "ALTER_ROLE": "weblate",
        # Database password
        "PASSWORD": "password",
        # Set to empty string for localhost
        "HOST": "database.example.com",
        # Set to empty string for default
        "PORT": "",
    }
}
```

The database migration performs `ALTER ROLE` on database role used by Weblate. In most cases the name of the role matches username. In more complex setups the role name is different than username and you will get error about non-existing role during the database migration (`psycopg2.errors.UndefinedObject: role "weblate@hostname" does not exist`). This is known to happen with Azure Database for PostgreSQL, but it's not limited to this environment. Please set `ALTER_ROLE` to change name of the role Weblate should alter during the database migration.

## MySQL and MariaDB

**Indication :** Some Weblate features will perform better with *PostgreSQL*. This includes searching and translation memory, which both utilize full-text features in the database and PostgreSQL implementation is superior.

Weblate can be also used with MySQL or MariaDB, please see [Notes sur MySQL](#) and [Notes MariaDB](#) for caveats using Django with those. Because of the limitations it is recommended to use *PostgreSQL* for new installations.

Weblate requires MySQL at least 5.7.8 or MariaDB at least 10.2.7.

Following configuration is recommended for Weblate :

- Use the `utf8mb4` charset to allow representation of higher Unicode planes (for example emojis).
- Configure the server with `innodb_large_prefix` to allow longer indices on text fields.
- Set the isolation level to `READ COMMITTED`.
- The SQL mode should be set to `STRICT_TRANS_TABLES`.

MySQL 8.x, MariaDB 10.5.x or newer have reasonable default configuration so that no server tweaking should be necessary and all what is needed can be configured on the client side.

Below is an example `/etc/my.cnf.d/server.cnf` for a server with 8 GB of RAM. These settings should be sufficient for most installs. MySQL and MariaDB have tunables that will increase the performance of your server that are considered not necessary unless you are planning on having large numbers of concurrent users accessing the system. See the various vendors documentation on those details.

It is absolutely critical to reduce issues when installing that the setting `innodb_file_per_table` is set properly and MySQL/MariaDB restarted before you start your Weblate install.

```
[mysqld]
character-set-server = utf8mb4
```

(suite sur la page suivante)

(suite de la page précédente)

```
character-set-client = utf8mb4
collation-server = utf8mb4_unicode_ci

datadir=/var/lib/mysql

log-error=/var/log/mariadb/mariadb.log

innodb_large_prefix=1
innodb_file_format=Barracuda
innodb_file_per_table=1
innodb_buffer_pool_size=2G
sql_mode=STRICT_TRANS_TABLES
```

---

**Indication :** In case you are getting #1071 – Specified key was too long; max key length is 767 bytes error, please update your configuration to include the innodb settings above and restart your install.

---

---

**Indication :** In case you are getting #2006 – MySQL server has gone away error, configuring CONN\_MAX\_AGE might help.

---

### Configurer Weblate pour utiliser MySQL/MariaDB

The settings.py snippet for MySQL and MariaDB :

```
DATABASES = {
    "default": {
        # Database engine
        "ENGINE": "django.db.backends.mysql",
        # Database name
        "NAME": "weblate",
        # Database user
        "USER": "weblate",
        # Database password
        "PASSWORD": "password",
        # Set to empty string for localhost
        "HOST": "127.0.0.1",
        # Set to empty string for default
        "PORT": "3306",
        # In case you wish to use additional
        # connection options
        "OPTIONS": {},
    }
}
```

You should also create the weblate user account in MySQL or MariaDB before you begin the install. Use the commands below to achieve that :

```
GRANT ALL ON weblate.* to 'weblate'@'localhost' IDENTIFIED BY 'password';
FLUSH PRIVILEGES;
```



## 2.1.6 Autres configurations

### Configuring outgoing e-mail

Weblate sends out e-mails on various occasions - for account activation and on various notifications configured by users. For this it needs access to an SMTP server.

The mail server setup is configured using these settings : `EMAIL_HOST`, `EMAIL_HOST_PASSWORD`, `EMAIL_USE_TLS`, `EMAIL_USE_SSL`, `EMAIL_HOST_USER` and `EMAIL_PORT`. Their names are quite self-explanatory, but you can find more info in the Django documentation.

---

**Indication :** In case you get error about not supported authentication (for example SMTP AUTH extension not supported by server), it is most likely caused by using insecure connection and server refuses to authenticate this way. Try enabling `EMAIL_USE_TLS` in such case.

---

#### Voir aussi :

*Not receiving e-mails from Weblate, Configuration des courriels sortants dans le conteneur Docker*

### Running behind reverse proxy

Several features in Weblate rely on being able to get client IP address. This includes *Limite de requêtes*, *Protection contre le spam* or *Journal d'audit*.

In default configuration Weblate parses IP address from `REMOTE_ADDR` which is set by the WSGI handler.

In case you are running a reverse proxy, this field will most likely contain its address. You need to configure Weblate to trust additional HTTP headers and parse the IP address from these. This can not be enabled by default as it would allow IP address spoofing for installations not using a reverse proxy. Enabling `IP_BEHIND_REVERSE_PROXY` might be enough for the most usual setups, but you might need to adjust `IP_PROXY_HEADER` and `IP_PROXY_OFFSET` as well.

Another thing to take care of is the `Host` header. It should match to whatever is configured as `SITE_DOMAIN`. Additional configuration might be needed in your reverse proxy (for example use `ProxyPreserveHost On` for Apache or `proxy_set_header Host $host;` with nginx).

#### Voir aussi :

*Protection contre le spam, Limite de requêtes, Journal d'audit, IP\_BEHIND\_REVERSE\_PROXY, IP\_PROXY\_HEADER, IP\_PROXY\_OFFSET, SECURE\_PROXY\_SSL\_HEADER*

### Proxy HTTP

Weblate does execute VCS commands and those accept proxy configuration from environment. The recommended approach is to define proxy settings in `settings.py` :

```
import os

os.environ["http_proxy"] = "http://proxy.example.com:8080"
os.environ["HTTPS_PROXY"] = "http://proxy.example.com:8080"
```

#### Voir aussi :

*Proxy Environment Variables*

## 2.1.7 Ajuster la configuration

**Voir aussi :**

*Configuration d'exemple*

Copy `weblate/settings_example.py` to `weblate/settings.py` and adjust it to match your setup. You will probably want to adjust the following options : `ADMINS`

List of site administrators to receive notifications when something goes wrong, for example notifications on failed merges, or Django errors.

**Voir aussi :**

`ADMINS`, *Properly configure admins*

`ALLOWED_HOSTS`

You need to set this to list the hosts your site is supposed to serve. For example :

```
ALLOWED_HOSTS = ["demo.weblate.org"]
```

Alternatively you can include wildcard :

```
ALLOWED_HOSTS = ["*"]
```

**Voir aussi :**

`ALLOWED_HOSTS`, `WEBLATE_ALLOWED_HOSTS`, *Allowed hosts setup*

`SESSION_ENGINE`

Configure how your sessions will be stored. In case you keep the default database backend engine, you should schedule : **`weblate clearsessions`** to remove stale session data from the database.

If you are using Redis as cache (see *Activer la mise en cache*) it is recommended to use it for sessions as well :

```
SESSION_ENGINE = "django.contrib.sessions.backends.cache"
```

**Voir aussi :**

*Configuration du moteur de sessions*, `SESSION_ENGINE`

`DATABASES`

Connectivity to database server, please check Django's documentation for more details.

**Voir aussi :**

*Database setup for Weblate*, `DATABASES`, *Bases de données*

`DEBUG`

Disable this for any production server. With debug mode enabled, Django will show backtraces in case of error to users, when you disable it, errors will be sent per e-mail to `ADMINS` (see above).

Debug mode also slows down Weblate, as Django stores much more info internally in this case.

**Voir aussi :**

`DEBUG`, *Disable debug mode*

`DEFAULT_FROM_EMAIL`

E-mail sender address for outgoing e-mail, for example registration e-mails.

**Voir aussi :**

`DEFAULT_FROM_EMAIL`

`SECRET_KEY`

Key used by Django to sign some info in cookies, see *Django secret key* for more info.

**Voir aussi :**

`SECRET_KEY`

`SERVER_EMAIL`

E-mail used as sender address for sending e-mails to the administrator, for example notifications on failed merges.

**Voir aussi :**

`SERVER_EMAIL`

## 2.1.8 Filling up the database

After your configuration is ready, you can run `weblate migrate` to create the database structure. Now you should be able to create translation projects using the admin interface.

In case you want to run an installation non interactively, you can use `weblate migrate --noinput`, and then create an admin user using `createadmin` command.


Once you are done, you should also check the *Performance report* in the admin interface, which will give you hints of potential non optimal configuration on your site.

**Voir aussi :**

*Configuration, List of privileges and built-in roles*

## 2.1.9 Configuration de production

For a production setup you should carry out adjustments described in the following sections. The most critical settings will trigger a warning, which is indicated by an exclamation mark in the top bar if signed in as a superuser :

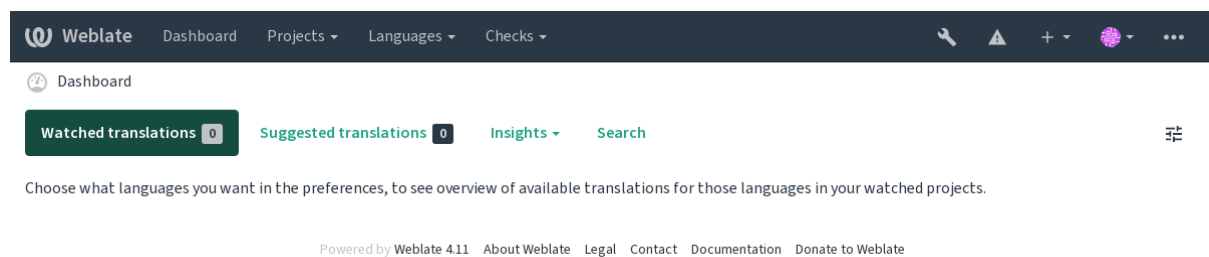

It is also recommended to inspect checks triggered by Django (though you might not need to fix all of them) :

```
weblate check --deploy
```

You can also review the very same checklist from the *Interface de gestion*.

**Voir aussi :**

*Liste de contrôle de déploiement*

### Disable debug mode

Disable Django's debug mode (*DEBUG*) by :

```
DEBUG = False
```

With debug mode on, Django stores all executed queries and shows users backtraces of errors, which is not desired in a production setup.

**Voir aussi :**

*Ajuster la configuration*

### Properly configure admins

Set the correct admin addresses to the `ADMINS` setting to defining who will receive e-mails in case something goes wrong on the server, for example :

```
ADMINS = (("Your Name", "your_email@example.com"),)
```

**Voir aussi :**

*Ajuster la configuration*

### Set correct site domain

Adjust site name and domain in the admin interface, otherwise links in RSS or registration e-mails will not work. This is configured using `SITE_DOMAIN` which should contain site domain name.

Modifié dans la version 4.2 : Prior to the 4.2 release the Django sites framework was used instead, please see [L'infrastructure des « sites »](#).

**Voir aussi :**

*Allowed hosts setup, Correctly configure HTTPS `SITE_DOMAIN`, `WEBLATE_SITE_DOMAIN`, `ENABLE_HTTPS`*

### Correctly configure HTTPS

It is strongly recommended to run Weblate using the encrypted HTTPS protocol. After enabling it, you should set `ENABLE_HTTPS` in the settings :

```
ENABLE_HTTPS = True
```

---

**Indication :** You might want to set up HSTS as well, see [SSL/HTTPS](#) for more details.

---

**Voir aussi :**

*`ENABLE_HTTPS`, Allowed hosts setup, Set correct site domain*

### Set properly `SECURE_HSTS_SECONDS`

If your site is served over SSL, you have to consider setting a value for `SECURE_HSTS_SECONDS` in the `settings.py` to enable HTTP Strict Transport Security. By default it's set to 0 as shown below.

```
SECURE_HSTS_SECONDS = 0
```

If set to a non-zero integer value, the `django.middleware.security.SecurityMiddleware` sets the Sécurité de transport HTTP stricte (HSTS) header on all responses that do not already have it.

**Avertissement :** Setting this incorrectly can irreversibly (for some time) break your site. Read the [Sécurité de transport HTTP stricte \(HSTS\)](#) documentation first.

## Use a powerful database engine

- Please use PostgreSQL for a production environment, see *Database setup for Weblate* for more info.
- Use adjacent location for running the database server, otherwise the networking performance or reliability might ruin your Weblate experience.
- Check the database server performance or tweak its configuration, for example using [PGTune](#).

**Voir aussi :**

*Database setup for Weblate, Migrating from other databases to PostgreSQL, Ajuster la configuration, Bases de données*

## Activer la mise en cache

If possible, use Redis from Django by adjusting the CACHES configuration variable, for example :

```
CACHES = {
    "default": {
        "BACKEND": "django_redis.cache.RedisCache",
        "LOCATION": "redis://127.0.0.1:6379/0",
        # If redis is running on same host as Weblate, you might
        # want to use unix sockets instead:
        # 'LOCATION': 'unix:///var/run/redis/redis.sock?db=0',
        "OPTIONS": {
            "CLIENT_CLASS": "django_redis.client.DefaultClient",
            "PARSER_CLASS": "redis.connection.HiredisParser",
        },
    },
}
```

**Indication :** In case you change Redis settings for the cache, you might need to adjust them for Celery as well, see *Background tasks using Celery*.

**Voir aussi :**

*Cache Avatar, L'infrastructure de cache dans Django*

## Cache Avatar

In addition to caching of Django, Weblate performs caching of avatars. It is recommended to use a separate, file-backed cache for this purpose :

```
CACHES = {
    "default": {
        # Default caching backend setup, see above
        "BACKEND": "django_redis.cache.RedisCache",
        "LOCATION": "unix:///var/run/redis/redis.sock?db=0",
        "OPTIONS": {
            "CLIENT_CLASS": "django_redis.client.DefaultClient",
            "PARSER_CLASS": "redis.connection.HiredisParser",
        },
    },
    "avatar": {
        "BACKEND": "django.core.cache.backends.filebased.FileBasedCache",
        "LOCATION": os.path.join(DATA_DIR, "avatar-cache"),
        "TIMEOUT": 604800,
        "OPTIONS": {
            "MAX_ENTRIES": 1000,
        },
    },
}
```

(suite sur la page suivante)

(suite de la page précédente)

```
} ,  
}
```

### Voir aussi :

[\*ENABLE\\_AVATARS\*](#), [\*AVATAR\\_URL\\_PREFIX\*](#), [\*Avatars\*](#), [\*Activer la mise en cache\*](#), [\*L'infrastructure de cache dans Django\*](#)

## Configure e-mail sending

Weblate needs to send out e-mails on several occasions, and these e-mails should have a correct sender address, please configure [\*SERVER\\_EMAIL\*](#) and [\*DEFAULT\\_FROM\\_EMAIL\*](#) to match your environment, for example :

```
SERVER_EMAIL = "admin@example.org"  
DEFAULT_FROM_EMAIL = "weblate@example.org"
```

---

**Note :** To disable sending e-mails by Weblate set [\*EMAIL\\_BACKEND\*](#) to `django.core.mail.backends.dummy.EmailBackend`.

This will disable *all* e-mail delivery including registration or password reset e-mails.

---

### Voir aussi :

[\*Ajuster la configuration\*](#), [\*Configuring outgoing e-mail\*](#), [\*EMAIL\\_BACKEND\*](#), [\*DEFAULT\\_FROM\\_EMAIL\*](#), [\*SERVER\\_EMAIL\*](#)

## Allowed hosts setup

Django requires [\*ALLOWED\\_HOSTS\*](#) to hold a list of domain names your site is allowed to serve, leaving it empty will block any requests.

In case this is not configured to match your HTTP server, you will get errors like Invalid HTTP\_HOST header: '1.1.1.1'. You may need to add '1.1.1.1' to [\*ALLOWED\\_HOSTS\*](#).

---

**Indication :** On Docker container, this is available as [\*WEBLATE\\_ALLOWED\\_HOSTS\*](#).

---

### Voir aussi :

[\*ALLOWED\\_HOSTS\*](#), [\*WEBLATE\\_ALLOWED\\_HOSTS\*](#), [\*Set correct site domain\*](#)

## Django secret key

The [\*SECRET\\_KEY\*](#) setting is used by Django to sign cookies, and you should really generate your own value rather than using the one from the example setup.

You can generate a new key using `weblate/examples/generate-secret-key` shipped with Weblate.

### Voir aussi :

[\*SECRET\\_KEY\*](#)

## Dossier personnel

Modifié dans la version 2.1 : This is no longer required, Weblate now stores all its data in `DATA_DIR`.

The home directory for the user running Weblate should exist and be writable by this user. This is especially needed if you want to use SSH to access private repositories, but Git might need to access this directory as well (depending on the Git version you use).

You can change the directory used by Weblate in `settings.py`, for example to set it to configuration directory under the Weblate tree :

```
os.environ["HOME"] = os.path.join(BASE_DIR, "configuration")
```

**Note :** On Linux, and other UNIX like systems, the path to user's home directory is defined in `/etc/passwd`. Many distributions default to a non-writable directory for users used for serving web content (such as `apache`, `www-data` or `wwwrun`), so you either have to run Weblate under a different user, or change this setting.

### Voir aussi :

*Accessing repositories*

## Chargement du modèle

It is recommended to use a cached template loader for Django. It caches parsed templates and avoids the need to do parsing with every single request. You can configure it using the following snippet (the `loaders` setting is important here) :

```
TEMPLATES = [
    {
        "BACKEND": "django.template.backends.django.DjangoTemplates",
        "DIRS": [
            os.path.join(BASE_DIR, "templates"),
        ],
        "OPTIONS": {
            "context_processors": [
                "django.contrib.auth.context_processors.auth",
                "django.template.context_processors.debug",
                "django.template.context_processors.i18n",
                "django.template.context_processors.request",
                "django.template.context_processors.csrf",
                "django.contrib.messages.context_processors.messages",
                "weblate.trans.context_processors.weblate_context",
            ],
            "loaders": [
                (
                    "django.template.loaders.cached.Loader",
                    [
                        "django.template.loaders.filesystem.Loader",
                        "django.template.loaders.app_directories.Loader",
                    ],
                ),
            ],
        },
    ],
]
```

### Voir aussi :

`django.template.loaders.cached.Loader`

### Running maintenance tasks

For optimal performance, it is good idea to run some maintenance tasks in the background. This is now automatically done by *Background tasks using Celery* and covers following tasks :

- Configuration health check (hourly).
- Committing pending changes (hourly), see *Archivages lazy* and *commit\_pending*.
- Updating component alerts (daily).
- Update remote branches (nightly), see *AUTO\_UPDATE*.
- Translation memory backup to JSON (daily), see *dump\_memory*.
- Fulltext and database maintenance tasks (daily and weekly tasks), see *cleanuptrans*.

Modifié dans la version 3.2 : Since version 3.2, the default way of executing these tasks is using Celery and Weblate already comes with proper configuration, see *Background tasks using Celery*.

### System locales and encoding

The system locales should be configured to UTF-8 capable ones. On most Linux distributions this is the default setting. In case it is not the case on your system, please change locales to UTF-8 variant.

For example by editing `/etc/default/locale` and setting there `LANG="C.UTF-8"`.

In some cases the individual services have separate configuration for locales. This varies between distribution and web servers, so check documentation of your web server packages for that.

Apache on Ubuntu uses `/etc/apache2/envvars` :

```
export LANG='en_US.UTF-8'
export LC_ALL='en_US.UTF-8'
```

Apache on CentOS uses `/etc/sysconfig/httpd` (or `/opt/rh/httpd24/root/etc/sysconfig/httpd`) :

```
LANG='en_US.UTF-8'
```

### Using custom certificate authority

Weblate does verify SSL certificates during HTTP requests. In case you are using custom certificate authority which is not trusted in default bundles, you will have to add its certificate as trusted.

The preferred approach is to do this at system level, please check your distro documentation for more details (for example on debian this can be done by placing the CA certificate into `/usr/local/share/ca-certificates/` and running **update-ca-certificates**).

Once this is done, system tools will trust the certificate and this includes Git.

For Python code, you will need to configure requests to use system CA bundle instead of the one shipped with it. This can be achieved by placing following snippet to `settings.py` (the path is Debian specific) :

```
import os

os.environ["REQUESTS_CA_BUNDLE"] = "/etc/ssl/certs/ca-certificates.crt"
```



## Compressing client assets

Weblate comes with a bunch of JavaScript and CSS files. For performance reasons it is good to compress them before sending to a client. In default configuration this is done on the fly at cost of little overhead. On big installations, it is recommended to enable offline compression mode. This needs to be done in the configuration and the compression has to be triggered on every Weblate upgrade.

The configuration switch is simple by enabling `django.conf.settings.COMPRESS_OFFLINE` and configuring `django.conf.settings.COMPRESS_OFFLINE_CONTEXT` (the latter is already included in the example configuration) :

```
COMPRESS_OFFLINE = True
```

On each deploy you need to compress the files to match current version :

```
weblate compress
```

---

**Indication :** The official Docker image has this feature already enabled.

---

**Voir aussi :**

[Common Deployment Scenarios](#), [Serving static files](#)

### 2.1.10 Exécuter un serveur

---

**Indication :** In case you are not experienced with services described below, you might want to try [Installing using Docker](#).

---

You will need several services to run Weblate, the recommended setup consists of :

- Database server (see [Database setup for Weblate](#))
- Cache server (see [Activer la mise en cache](#))
- Frontend web server for static files and SSL termination (see [Serving static files](#))
- WSGI server for dynamic content (see [Sample configuration for NGINX and uWSGI](#))
- Celery for executing background tasks (see [Background tasks using Celery](#))

---

**Note :** There are some dependencies between the services, for example cache and database should be running when starting up Celery or uwsgi processes.

---

In most cases, you will run all services on single (virtual) server, but in case your installation is heavy loaded, you can split up the services. The only limitation on this is that Celery and Wsgi servers need access to `DATA_DIR`.

---

**Note :** The WSGI process has to be executed under the same user the Celery process, otherwise files in the `DATA_DIR` will be stored with mixed ownership, leading to runtime issues.

Voir aussi [Permissions du système de fichiers](#) et [Background tasks using Celery](#).

---

### Running web server

Running Weblate is not different from running any other Django based program. Django is usually executed as uWSGI or fcgi (see examples for different web servers below).

For testing purposes, you can use the built-in web server in Django :

```
weblate runserver
```

**Avertissement :** DO NOT USE THIS SERVER IN A PRODUCTION SETTING. It has not gone through security audits or performance tests. See also Django documentation on [runserver](#).

---

**Indication :** The Django built-in server serves static files only with `DEBUG` enabled as it is intended for development only. For production use, please see wsgi setups in *Sample configuration for NGINX and uWSGI*, *Sample configuration for Apache*, *Sample configuration for Apache and Gunicorn*, and *Serving static files*.

---

### Serving static files

Modifié dans la version 2.4 : Prior to version 2.4, Weblate didn't properly use the Django static files framework and the setup was more complex.

Django needs to collect its static files in a single directory. To do so, execute `weblate collectstatic --noinput`. This will copy the static files into a directory specified by the `STATIC_ROOT` setting (this defaults to a static directory inside `DATA_DIR`).

It is recommended to serve static files directly from your web server, you should use that for the following paths :

- `/static/` Serves static files for Weblate and the admin interface (from defined by `STATIC_ROOT`).

- `/media/` Used for user media uploads (e.g. screenshots).

- `/favicon.ico` Should be rewritten to rewrite a rule to serve `/static/favicon.ico`.

**Voir aussi :**

*Sample configuration for NGINX and uWSGI*, *Sample configuration for Apache*, *Sample configuration for Apache and Gunicorn*, *Compressing client assets*, *Comment déployer Django*, *Déploiement des fichiers statiques*

### Content security policy

The default Weblate configuration enables `weblate.middleware.SecurityMiddleware` middleware which sets security related HTTP headers like `Content-Security-Policy` or `X-XSS-Protection`. These are by default set up to work with Weblate and its configuration, but this might need customization for your environment.

**Voir aussi :**

`CSP_SCRIPT_SRC`, `CSP_IMG_SRC`, `CSP_CONNECT_SRC`, `CSP_STYLE_SRC`, `CSP_FONT_SRC`

## Sample configuration for NGINX and uWSGI

To run production webserver, use the wsgi wrapper installed with Weblate (in virtual env case it is installed as `~/weblate-env/lib/python3.7/site-packages/weblate/wsgi.py`). Don't forget to set the Python search path to your virtualenv as well (for example using `virtualenv = /home/user/weblate-env` in uWSGI).

The following configuration runs Weblate as uWSGI under the NGINX webserver.

Configuration for NGINX (also available as `weblate/examples/weblate.nginx.conf`):

```
# This example assumes Weblate is installed in virtualenv in /home/weblate/weblate-
↪env
# and DATA_DIR is set to /home/weblate/data, please adjust paths to match your_
↪setup.
server {
    listen 80;
    server_name weblate;
    # Not used
    root /var/www/html;

    location ~ ^/favicon.ico$ {
        # DATA_DIR/static/favicon.ico
        alias /home/weblate/data/static/favicon.ico;
        expires 30d;
    }

    location /static/ {
        # DATA_DIR/static/
        alias /home/weblate/data/static/;
        expires 30d;
    }

    location /media/ {
        # DATA_DIR/media/
        alias /home/weblate/data/media/;
        expires 30d;
    }

    location / {
        include uwsgi_params;
        # Needed for long running operations in admin interface
        uwsgi_read_timeout 3600;
        # Adjust based to uwsgi configuration:
        uwsgi_pass unix:///run/uwsgi/app/weblate/socket;
        # uwsgi_pass 127.0.0.1:8080;
    }
}
```

Configuration for uWSGI (also available as `weblate/examples/weblate.uwsgi.ini`):

```
# This example assumes Weblate is installed in virtualenv in /home/weblate/weblate-
↪env
# and DATA_DIR is set to /home/weblate/data, please adjust paths to match your_
↪setup.
[uwsgi]
plugins      = python3
master       = true
protocol     = uwsgi
socket       = 127.0.0.1:8080
wsgi-file    = /home/weblate/weblate-env/lib/python3.9/site-packages/weblate/wsgi.
↪py
```

(suite sur la page suivante)

(suite de la page précédente)

```
# Add path to Weblate checkout if you did not install
# Weblate by pip
# python-path    = /path/to/weblate

# In case you're using virtualenv uncomment this:
virtualenv = /home/weblate/weblate-env

# Needed for OAuth/OpenID
buffer-size    = 8192

# Reload when consuming too much of memory
reload-on-rss  = 250

# Increase number of workers for heavily loaded sites
workers        = 8

# Enable threads for Sentry error submission
enable-threads = true

# Child processes do not need file descriptors
close-on-exec  = true

# Avoid default 0000 umask
umask = 0022

# Run as weblate user
uid = weblate
gid = weblate

# Enable harakiri mode (kill requests after some time)
# harakiri = 3600
# harakiri-verbose = true

# Enable uWSGI stats server
# stats = :1717
# stats-http = true

# Do not log some errors caused by client disconnects
ignore-sigpipe = true
ignore-write-errors = true
disable-write-exception = true
```

**Voir aussi :**

Déploiement de Django avec uWSGI

**Sample configuration for Apache**

It is recommended to use prefork MPM when using WSGI with Weblate.

The following configuration runs Weblate as WSGI, you need to have enabled `mod_wsgi` (available as `weblate/examples/apache.conf`):

```
#
# VirtualHost for Weblate
#
# This example assumes Weblate is installed in virtualenv in /home/weblate/weblate-
↪env
# and DATA_DIR is set to /home/weblate/data, please adjust paths to match your ↪
↪setup.
#
```

(suite sur la page suivante)

(suite de la page précédente)

```

<VirtualHost *:80>
    ServerAdmin admin@weblate.example.org
    ServerName weblate.example.org

    # DATA_DIR/static/favicon.ico
    Alias /favicon.ico /home/weblate/data/static/favicon.ico

    # DATA_DIR/static/
    Alias /static/ /home/weblate/data/static/
    <Directory /home/weblate/data/static/>
        Require all granted
    </Directory>

    # DATA_DIR/media/
    Alias /media/ /home/weblate/data/media/
    <Directory /home/weblate/data/media/>
        Require all granted
    </Directory>

    # Path to your Weblate virtualenv
    WSGIDaemonProcess weblate python-home=/home/weblate/weblate-env user=weblate_
↪request-timeout=600
    WSGIProcessGroup weblate
    WSGIApplicationGroup %{GLOBAL}

    WSGIScriptAlias / /home/weblate/weblate-env/lib/python3.7/site-packages/
↪weblate/wsgi.py process-group=weblate
    WSGIPassAuthorization On

    <Directory /home/weblate/weblate-env/lib/python3.7/site-packages/weblate/>
        <Files wsgi.py>
            Require all granted
        </Files>
    </Directory>

</VirtualHost>

```

**Note :** Weblate requires Python 3, so please make sure you are running Python 3 variant of the modwsgi. Usually it is available as a separate package, for example `libapache2-mod-wsgi-py3`.

#### Voir aussi :

*System locales and encoding*, Django avec Apache et mod\_wsgi

### Sample configuration for Apache and Gunicorn

The following configuration runs Weblate in Gunicorn and Apache 2.4 (available as `weblate/examples/apache.gunicorn.conf`):

```

#
# VirtualHost for Weblate using gunicorn on localhost:8000
#
# This example assumes Weblate is installed in virtualenv in /home/weblate/weblate-
↪env
# and DATA_DIR is set to /home/weblate/data, please adjust paths to match your_
↪setup.
#
<VirtualHost *:443>

```

(suite sur la page suivante)

(suite de la page précédente)

```

ServerAdmin admin@weblate.example.org
ServerName weblate.example.org

# DATA_DIR/static/favicon.ico
Alias /favicon.ico /home/weblate/data/static/favicon.ico

# DATA_DIR/static/
Alias /static/ /home/weblate/data/static/
<Directory /home/weblate/data/static/>
    Require all granted
</Directory>

# DATA_DIR/media/
Alias /media/ /home/weblate/data/media/
<Directory /home/weblate/data/media/>
    Require all granted
</Directory>

SSLEngine on
SSLCertificateFile /etc/apache2/ssl/https_cert.cert
SSLCertificateKeyFile /etc/apache2/ssl/https_key.pem
SSLProxyEngine On

ProxyPass /favicon.ico !
ProxyPass /static/ !
ProxyPass /media/ !

ProxyPass / http://localhost:8000/
ProxyPassReverse / http://localhost:8000/
ProxyPreserveHost On
</VirtualHost>

```

**Voir aussi :**

Déploiement de Django avec Gunicorn

**Running Weblate under path**

Nouveau dans la version 1.3.

It is recommended to use prefork MPM when using WSGI with Weblate.

A sample Apache configuration to serve Weblate under /weblate. Again using mod\_wsgi (also available as weblate/examples/apache-path.conf):

```

#
# VirtualHost for Weblate, running under /weblate path
#
# This example assumes Weblate is installed in virtualenv in /home/weblate/weblate-
↪env
# and DATA_DIR is set to /home/weblate/data, please adjust paths to match your_
↪setup.
#
<VirtualHost *:80>
    ServerAdmin admin@weblate.example.org
    ServerName weblate.example.org

    # DATA_DIR/static/favicon.ico
    Alias /weblate/favicon.ico /home/weblate/data/static/favicon.ico

    # DATA_DIR/static/

```

(suite sur la page suivante)

(suite de la page précédente)

```

Alias /weblate/static/ /home/weblate/data/static/
<Directory /home/weblate/data/static/>
    Require all granted
</Directory>

# DATA_DIR/media/
Alias /weblate/media/ /home/weblate/data/media/
<Directory /home/weblate/data/media/>
    Require all granted
</Directory>

# Path to your Weblate virtualenv
WSGIDaemonProcess weblate python-home=/home/weblate/weblate-env user=weblate_
↪request-timeout=600
WSGIProcessGroup weblate
WSGIApplicationGroup %{GLOBAL}

WSGIScriptAlias /weblate /home/weblate/weblate-env/lib/python3.7/site-packages/
↪weblate/wsgi.py process-group=weblate
WSGIPassAuthorization On

<Directory /home/weblate/weblate-env/lib/python3.7/site-packages/weblate/>
    <Files wsgi.py>
        Require all granted
    </Files>
</Directory>

</VirtualHost>

```

Additionally, you will have to adjust `weblate/settings.py` :

```
URL_PREFIX = "/weblate"
```

## 2.1.11 Background tasks using Celery

Nouveau dans la version 3.2.

Weblate uses Celery to execute regular and background tasks. You are supposed to run a Celery service that will execute these. For example, it is responsible for handling following operations (this list is not complete) :

- Receiving webhooks from external services (see *Déclencheurs de notification*).
- Running regular maintenance tasks such as backups, cleanups, daily add-ons, or updates (see *Sauvegarder et déplacer Weblate*, *BACKGROUND\_TASKS*, *Modules*).
- Exécution de *Traduction automatique*.
- Sending digest notifications.
- Offloading expensive operations from the wsgi process.
- Committing pending changes (see *Archivages lazy*).

A typical setup using Redis as a backend looks like this :

```

CELERY_TASK_ALWAYS_EAGER = False
CELERY_BROKER_URL = "redis://localhost:6379"
CELERY_RESULT_BACKEND = CELERY_BROKER_URL

```

**Voir aussi :**

Configuration de Redis broker dans Celery

You should also start the Celery worker to process the tasks and start scheduled tasks, this can be done directly on the command-line (which is mostly useful when debugging or developing) :

```
./weblate/examples/celery start
./weblate/examples/celery stop
```

**Note :** The Celery process has to be executed under the same user as the WSGI process, otherwise files in the `DATA_DIR` will be stored with mixed ownership, leading to runtime issues.

Voir aussi *Permissions du système de fichiers* et *Exécuter un serveur*.

---

### Executing Celery tasks in the wsgi using eager mode

**Note :** This will have severe performance impact on the web interface, and will break features depending on regular trigger (for example committing pending changes, digest notifications, or backups).

---

For development, you might want to use eager configuration, which does process all tasks in place :

```
CELERY_TASK_ALWAYS_EAGER = True
CELERY_BROKER_URL = "memory://"
CELERY_TASK_EAGER_PROPAGATES = True
```

### Running Celery as system service

Most likely you will want to run Celery as a daemon and that is covered by [Daemonization](#). For the most common Linux setup using systemd, you can use the example files shipped in the `examples` folder listed below.

Systemd unit to be placed as `/etc/systemd/system/celery-weblate.service` :

```
[Unit]
Description=Celery Service (Weblate)
After=network.target

[Service]
Type=forking
User=weblate
Group=weblate
EnvironmentFile=/etc/default/celery-weblate
WorkingDirectory=/home/weblate
RuntimeDirectory=celery
RuntimeDirectoryPreserve=restart
LogsDirectory=celery
ExecStart=/bin/sh -c '${CELERY_BIN} multi start ${CELERYD_NODES} \
  -A ${CELERY_APP} --pidfile=${CELERYD_PID_FILE} \
  --logfile=${CELERYD_LOG_FILE} --loglevel=${CELERYD_LOG_LEVEL} ${CELERYD_OPTS}'
ExecStop=/bin/sh -c '${CELERY_BIN} multi stopwait ${CELERYD_NODES} \
  --pidfile=${CELERYD_PID_FILE}'
ExecReload=/bin/sh -c '${CELERY_BIN} multi restart ${CELERYD_NODES} \
  -A ${CELERY_APP} --pidfile=${CELERYD_PID_FILE} \
  --logfile=${CELERYD_LOG_FILE} --loglevel=${CELERYD_LOG_LEVEL} ${CELERYD_OPTS}'

[Install]
WantedBy=multi-user.target
```

Environment configuration to be placed as `/etc/default/celery-weblate` :

```
# Name of nodes to start
CELERYD_NODES="celery notify memory backup translate"
```

(suite sur la page suivante)



(suite de la page précédente)

```
# Absolute or relative path to the 'celery' command:
CELERY_BIN="/home/weblate/weblate-env/bin/celery"

# App instance to use
# comment out this line if you don't use an app
CELERY_APP="weblate.utils"

# Extra command-line arguments to the worker,
# increase concurrency if you get weblate.E019
CELERYD_OPTS="--beat:celery --queues:celery=celery --prefetch-multiplier:celery=4 \
  --queues:notify=notify --prefetch-multiplier:notify=10 \
  --queues:memory=memory --prefetch-multiplier:memory=10 \
  --queues:translate=translate --prefetch-multiplier:translate=4 \
  --concurrency:backup=1 --queues:backup=backup --prefetch-multiplier:backup=2"

# Logging configuration
# - %n will be replaced with the first part of the nodename.
# - %I will be replaced with the current child process index
# and is important when using the prefork pool to avoid race conditions.
CELERYD_PID_FILE="/run/celery/weblate-%n.pid"
CELERYD_LOG_FILE="/var/log/celery/weblate-%n%I.log"
CELERYD_LOG_LEVEL="INFO"
```

Additional configuration to rotate Celery logs using **logrotate** to be placed as `/etc/logrotate.d/celery`:

```
/var/log/celery/*.log {
    weekly
    missingok
    rotate 12
    compress
    notifempty
}
```

## Periodic tasks using Celery beat

Weblate comes with built-in setup for scheduled tasks. You can however define additional tasks in `settings.py`, for example see *Archivages lazy*.

The tasks are supposed to be executed by Celery beats daemon. In case it is not working properly, it might not be running or its database was corrupted. Check the Celery startup logs in such case to figure out root cause.

## Monitoring Celery status

You can find current length of the Celery task queues in the *Interface de gestion* or you can use `celery_queues` on the command-line. In case the queue will get too long, you will also get configuration error in the admin interface.

**Avertissement :** The Celery errors are by default only logged into Celery log and are not visible to user. In case you want to have overview on such failures, it is recommended to configure *Collecting error reports*.

### Voir aussi :

Configuration and defaults, Workers Guide, Daemonization, Monitoring and Management Guide, `celery_queues`

### 2.1.12 Surveiller Weblate

Weblate provides the `/healthz/` URL to be used in simple health checks, for example using Kubernetes. The Docker container has built-in health check using this URL.

For monitoring metrics of Weblate you can use `GET /api/metrics/` API endpoint.

**Voir aussi :**

[Weblate plugin for Munin](#)

### 2.1.13 Collecting error reports

Weblate, as any other software, can fail. In order to collect useful failure states we recommend to use third party services to collect such information. This is especially useful in case of failing Celery tasks, which would otherwise only report error to the logs and you won't get notified on them. Weblate has support for the following services :

#### Sentry

Weblate has built-in support for [Sentry](#). To use it, it's enough to set `SENTRY_DSN` in the `settings.py` :

```
SENTRY_DSN = "https://id@your.sentry.example.com/"
```

#### Rollbar

Weblate has built-in support for [Rollbar](#). To use it, it's enough to follow instructions for [Rollbar notifier for Python](#).

In short, you need to adjust `settings.py` :

```
# Add rollbar as last middleware:
MIDDLEWARE = [
    # ... other middleware classes ...
    "rollbar.contrib.django.middleware.RollbarNotifierMiddleware",
]

# Configure client access
ROLLBAR = {
    "access_token": "POST_SERVER_ITEM_ACCESS_TOKEN",
    "client_token": "POST_CLIENT_ITEM_ACCESS_TOKEN",
    "environment": "development" if DEBUG else "production",
    "branch": "main",
    "root": "/absolute/path/to/code/root",
}
```

Everything else is integrated automatically, you will now collect both server and client side errors.

### 2.1.14 Migrating Weblate to another server

Migrating Weblate to another server should be pretty easy, however it stores data in few locations which you should migrate carefully. The best approach is to stop Weblate for the migration.

## Migrer la base de données

Depending on your database backend, you might have several options to migrate the database. The most straightforward one is to dump the database on one server and import it on the new one. Alternatively you can use replication in case your database supports it.

The best approach is to use database native tools, as they are usually the most effective (e.g. **mysqldump** or **pg\_dump**). If you want to migrate between different databases, the only option might be to use Django management to dump and import the database :

```
# Export current data
weblate dumpdata > /tmp/weblate.dump
# Import dump
weblate loaddata /tmp/weblate.dump
```

## Migrating VCS repositories

The VCS repositories stored under `DATA_DIR` need to be migrated as well. You can simply copy them or use **rsync** to do the migration more effectively.

## Autres notes

Don't forget to move other services Weblate might have been using like Redis, Cron jobs or custom authentication backends.

## 2.2 Déploiements Weblate

Weblate can be easily installed in your cloud. Please find detailed guide for your platform :

- *Installing using Docker*
- *Installing on OpenShift*
- *Installing on Kubernetes*

### 2.2.1 Third-party deployments for Weblate

---

**Note :** Following deployments are not developed or supported by Weblate team. Parts of the setup might vary from what is described in this documentation.

---

#### Bitnami Weblate stack

Bitnami provides a Weblate stack for many platforms at <<https://bitnami.com/stack/weblate>>. The setup will be adjusted during installation, see <<https://bitnami.com/stack/weblate/README.txt>> for more documentation.

## Paquet Cloudron Weblate

**Cloudron** is a platform for self-hosting web applications. Weblate installed with Cloudron will be automatically kept up-to-date. The package is maintained by the Cloudron team at their [Weblate package repo](#).



## Weblate in YunoHost

The self-hosting project **YunoHost** provides a package for Weblate. Once you have your YunoHost installation, you may install Weblate as any other application. It will provide you with a fully working stack with backup and restoration, but you may still have to edit your settings file for specific usages.

You may use your administration interface, or this button (it will bring you to your server) :



It also is possible to use the command-line interface :

```
yunohost app install https://github.com/YunoHost-Apps/weblate_ynh
```

## 2.3 Mise à niveau de Weblate

### 2.3.1 Docker image upgrades

The official Docker image (see *Installing using Docker*) has all Weblate upgrade steps integrated. There are typically no manual steps needed besides pulling latest version.

**Voir aussi :**

*Upgrading the Docker container*

### 2.3.2 Generic upgrade instructions

Before upgrading, please check the current *Exigences logicielles* as they might have changed. Once all requirements are installed or updated, please adjust your `settings.py` to match changes in the configuration (consult `settings_example.py` for correct values).

Always check *Version specific instructions* before upgrade. In case you are skipping some versions, please follow instructions for all versions you are skipping in the upgrade. Sometimes it's better to upgrade to some intermediate version to ensure a smooth migration. Upgrading across multiple releases should work, but is not as well tested as single version upgrades.

---

**Note :** It is recommended to perform a full database backup prior to upgrade so that you can roll back the database in case upgrade fails, see *Sauvegarder et déplacer Weblate*.

---

1. Stop wsgi and Celery processes. The upgrade can perform incompatible changes in the database, so it is always safer to avoid old processes running while upgrading.
2. Upgrade Weblate code.  
For pip installs it can be achieved by :

```
pip install -U "Weblate[all]"
```

If you don't want to install all of the optional dependencies do :

```
pip install -U Weblate
```

With Git checkout you need to fetch new source code and update your installation :

```
cd weblate-src
git pull
# Update Weblate inside your virtualenv
. ~/weblate-env/bin/pip install -e .
# Install dependencies directly when not using virtualenv
pip install --upgrade -r requirements.txt
# Install optional dependencies directly when not using virtualenv
pip install --upgrade -r requirements-optional.txt
```

3. New Weblate release might have new *Optional dependencies*, please check if they cover features you want.
4. Upgrade configuration file, refer to `settings_example.py` or *Version specific instructions* for needed steps.
5. Upgrade database structure :

```
weblate migrate --noinput
```

6. Collect updated static files (see *Exécuter un serveur* and *Serving static files*) :

```
weblate collectstatic --noinput --clear
```

7. Compress JavaScript and CSS files (optional, see *Compressing client assets*) :

```
weblate compress
```

8. If you are running version from Git, you should also regenerate locale files every time you are upgrading. You can do this by invoking :

```
weblate compilemessages
```

9. Verify that your setup is sane (see also *Configuration de production*) :

```
weblate check --deploy
```

10. Restart Celery worker (see *Background tasks using Celery*).

## 2.3.3 Version specific instructions

### Upgrade from 2.x

If you are upgrading from 2.x release, always first upgrade to 3.0.1 and then continue upgrading in the 3.x series. Upgrades skipping this step are not supported and will break.

**Voir aussi :**

Upgrade from 2.20 to 3.0 in [Weblate 3.0 documentation](#)

### Upgrade from 3.x

If you are upgrading from 3.x release, always first upgrade to 4.0.4 or 4.1.1 and then continue upgrading in the 4.x series. Upgrades skipping this step are not supported and will break.

**Voir aussi :**

[Upgrade from 3.11 to 4.0 in Weblate 4.0 documentation](#)

### Upgrade from 4.0 to 4.1

Please follow *Generic upgrade instructions* in order to perform update.

Notable configuration or dependencies changes :

- There are several changes in `settings_example.py`, most notable middleware changes, please adjust your settings accordingly.
- There are new file formats, you might want to include them in case you modified the `WEBLATE_FORMATS`.
- There are new quality checks, you might want to include them in case you modified the `CHECK_LIST`.
- There is change in `DEFAULT_THROTTLE_CLASSES` setting to allow reporting of rate limiting in the API.
- There are some new and updated requirements.
- There is a change in `INSTALLED_APPS`.
- The `MT_DEEPL_API_VERSION` setting has been removed in Version 4.7. The *DeepL* machine translation now uses the new `MT_DEEPL_API_URL` instead. You might need to adjust `MT_DEEPL_API_URL` to match your subscription.

**Voir aussi :**

[Generic upgrade instructions](#)

### Upgrade from 4.1 to 4.2

Please follow *Generic upgrade instructions* in order to perform update.

Notable configuration or dependencies changes :

- Upgrade from 3.x releases is not longer supported, please upgrade to 4.0 or 4.1 first.
- There are some new and updated requirements.
- There are several changes in `settings_example.py`, most notable new middleware and changed application ordering.
- The keys for JSON based formats no longer include leading dot. The strings are adjusted during the database migration, but external components might need adjustment in case you rely on keys in exports or API.
- The Celery configuration was changed to no longer use `memory` queue. Please adjust your startup scripts and `CELERY_TASK_ROUTES` setting.
- The Weblate domain is now configured in the settings, see `SITE_DOMAIN` (or `WEBLATE_SITE_DOMAIN`). You will have to configure it before running Weblate.
- The username and email fields on user database now should be case insensitive unique. It was mistakenly not enforced with PostgreSQL.

**Voir aussi :**

[Generic upgrade instructions](#)

## Upgrade from 4.2 to 4.3

Please follow *Generic upgrade instructions* in order to perform update.

Notable configuration or dependencies changes :

- There are some changes in quality checks, you might want to include them in case you modified the `CHECK_LIST`.
- The source language attribute was moved from project to a component what is exposed in the API. You will need to update *Client Weblate* in case you are using it.
- The database migration to 4.3 might take long depending on number of strings you are translating (expect around one hour of migration time per 100,000 source strings).
- There is a change in `INSTALLED_APPS`.
- There is a new setting `SESSION_COOKIE_AGE_AUTHENTICATED` which complements `SESSION_COOKIE_AGE`.
- In case you were using **hub** or **lab** to integrate with GitHub or GitLab, you will need to reconfigure this, see `GITHUB_CREDENTIALS` and `GITLAB_CREDENTIALS`.

Modifié dans la version 4.3.1 :

- The Celery configuration was changed to add `memory` queue. Please adjust your startup scripts and `CELERY_TASK_ROUTES` setting.

Modifié dans la version 4.3.2 :

- The `post_update` method of add-ons now takes extra `skip_push` parameter.

**Voir aussi :**

*Generic upgrade instructions*

## Upgrade from 4.3 to 4.4

Please follow *Generic upgrade instructions* in order to perform update.

Notable configuration or dependencies changes :

- There is a change in `INSTALLED_APPS`, `weblate.configuration` has to be added there.
- Django 3.1 is now required.
- In case you are using MySQL or MariaDB, the minimal required versions have increased, see *MySQL and MariaDB*.

Modifié dans la version 4.4.1 :

- *Gettext monolingue* now uses both `msgid` and `msgctxt` when present. This will change identification of translation strings in such files breaking links to Weblate extended data such as screenshots or review states. Please make sure you commit pending changes in such files prior upgrading and it is recommended to force loading of affected component using `loadpo`.
- Increased minimal required version of `translate-toolkit` to address several file format issues.

**Voir aussi :**

*Generic upgrade instructions*

## Upgrade from 4.4 to 4.5

Please follow *Generic upgrade instructions* in order to perform update.

Notable configuration or dependencies changes :

- The migration might take considerable time if you had big glossaries.
- Glossaries are now stored as regular components.
- The glossary API is removed, use regular translation API to access glossaries.
- There is a change in `INSTALLED_APPS` - `weblate.metrics` should be added.

Modifié dans la version 4.5.1 :

- There is a new dependency on the *pyahocorasick* module.

**Voir aussi :**

*Generic upgrade instructions*

## Upgrade from 4.5 to 4.6

Please follow *Generic upgrade instructions* in order to perform update.

Notable configuration or dependencies changes :

- There are new file formats, you might want to include them in case you modified the `WEBLATE_FORMATS`.
- API for creating components now automatically uses *Weblate internal URLs*, see `POST /api/projects/(string:project)/components/`.
- There is a change in dependencies and `PASSWORD_HASHERS` to prefer Argon2 for passwords hashing.

**Voir aussi :**

*Generic upgrade instructions*

## Upgrade from 4.6 to 4.7

Please follow *Generic upgrade instructions* in order to perform update.

Notable configuration or dependencies changes :

- There are several changes in `settings_example.py`, most notable middleware changes (`MIDDLEWARE`), please adjust your settings accordingly.
- The *DeepL* machine translation now has a generic `MT_DEEPL_API_URL` setting to adapt to different subscription models more flexibly. The `MT_DEEPL_API_VERSION` setting is no longer used.
- Django 3.2 is now required.

**Voir aussi :**

*Generic upgrade instructions*

## Upgrade from 4.7 to 4.8

Please follow *Generic upgrade instructions* in order to perform update.

There are no additional upgrade steps needed in this release.

**Voir aussi :**

*Generic upgrade instructions*

## Upgrade from 4.8 to 4.9

Please follow *Generic upgrade instructions* in order to perform update.

- There is a change in storing metrics, the upgrade can take long time on larger sites.

**Voir aussi :**

*Generic upgrade instructions*

## Upgrade from 4.9 to 4.10

Please follow *Generic upgrade instructions* in order to perform update.

- There is a change in per-project groups, the upgrade can take long time on sites with thousands of projects.
- Django 4.0 has made some incompatible changes, see *Changements incompatibles avec les anciennes versions dans Django 4.0*. Weblate still supports Django 3.2 for now, in case any of these are problematic. Most notable changes which might affect Weblate :
  - Dropped support for PostgreSQL 9.6, Django 4.0 supports PostgreSQL 10 and higher.
  - Format of `CSRF_TRUSTED_ORIGINS` was changed.
- The Docker container now uses Django 4.0, see above for changes.

**Voir aussi :**

*Generic upgrade instructions*



## Mise à niveau de la version 4.10 vers la version 4.11

Please follow *Generic upgrade instructions* in order to perform update.

- Weblate now requires Python 3.7 or newer.
- The implementation of *Gestion du contrôle d'accès par projet* has changed, removing the project prefix from the group names. This affects API users.
- Weblate now uses `charset-normalizer` instead of `chardet` module for character set detection.

**Voir aussi :**

*Generic upgrade instructions*

## 2.3.4 Upgrading from Python 2 to Python 3

Weblate no longer supports Python older than 3.6. In case you are still running on older version, please perform migration to Python 3 first on existing version and upgrade later. See [Upgrading from Python 2 to Python 3 in the Weblate 3.11.1 documentation](#).

## 2.3.5 Migrating from other databases to PostgreSQL

If you are running Weblate on other database than PostgreSQL, you should consider migrating to PostgreSQL as Weblate performs best with it. The following steps will guide you in migrating your data between the databases. Please remember to stop both web and Celery servers prior to the migration, otherwise you might end up with inconsistent data.

### Creating a database in PostgreSQL

It is usually a good idea to run Weblate in a separate database, and separate user account :

```
# If PostgreSQL was not installed before, set the main password
sudo -u postgres psql postgres -c "\password postgres"

# Create a database user called "weblate"
sudo -u postgres createuser -D -P weblate

# Create the database "weblate" owned by "weblate"
sudo -u postgres createdb -E UTF8 -O weblate weblate
```

### Migrating using Django JSON dumps

The simplest approach for migration is to utilize Django JSON dumps. This works well for smaller installations. On bigger sites you might want to use `pgloader` instead, see [Migrating to PostgreSQL using pgloader](#).

1. Add PostgreSQL as additional database connection to the `settings.py` :

```
DATABASES = {
    "default": {
        # Database engine
        "ENGINE": "django.db.backends.mysql",
        # Database name
        "NAME": "weblate",
        # Database user
        "USER": "weblate",
        # Database password
        "PASSWORD": "password",
        # Set to empty string for localhost
        "HOST": "database.example.com",
```

(suite sur la page suivante)

```

# Set to empty string for default
"PORT": "",
# Additional database options
"OPTIONS": {
    # In case of using an older MySQL server, which has MyISAM as a
    ↳ default storage
    # 'init_command': 'SET storage_engine=INNODB',
    # Uncomment for MySQL older than 5.7:
    # 'init_command': "SET sql_mode='STRICT_TRANS_TABLES'",
    # If your server supports it, see the Unicode issues above
    "charset": "utf8mb4",
    # Change connection timeout in case you get MySQL gone away error:
    "connect_timeout": 28800,
},
},
"postgresql": {
    # Database engine
    "ENGINE": "django.db.backends.postgresql",
    # Database name
    "NAME": "weblate",
    # Database user
    "USER": "weblate",
    # Database password
    "PASSWORD": "password",
    # Set to empty string for localhost
    "HOST": "database.example.com",
    # Set to empty string for default
    "PORT": "",
},
}

```

2. Run migrations and drop any data inserted into the tables :

```

weblate migrate --database=postgresql
weblate sqlflush --database=postgresql | weblate dbshell --database=postgresql

```

3. Dump legacy database and import to PostgreSQL

```

weblate dumpdata --all --output weblate.json
weblate loaddata weblate.json --database=postgresql

```

4. Adjust `DATABASES` to use just PostgreSQL database as default, remove legacy connection.

Weblate should be now ready to run from the PostgreSQL database.

## Migrating to PostgreSQL using pgloader

The `pgloader` is a generic migration tool to migrate data to PostgreSQL. You can use it to migrate Weblate database.

1. Adjust your `settings.py` to use PostgreSQL as a database.
2. Migrate the schema in the PostgreSQL database :

```

weblate migrate
weblate sqlflush | weblate dbshell

```

3. Run the `pgloader` to transfer the data. The following script can be used to migrate the database, but you might want to learn more about `pgloader` to understand what it does and tweak it to match your setup :

```

LOAD DATABASE
FROM      mysql://weblate:password@localhost/weblate
INTO      postgresql://weblate:password@localhost/weblate

WITH include no drop, truncate, create no tables, create no indexes, no_
↪foreign keys, disable triggers, reset sequences, data only

ALTER SCHEMA 'weblate' RENAME TO 'public'
;

```

### 2.3.6 Migrating from Pootle

As Weblate was originally written as replacement from Pootle, it is supported to migrate user accounts from Pootle. You can dump the users from Pootle and import them using *importusers*.

## 2.4 Sauvegarder et déplacer Weblate

### 2.4.1 Sauvegarde automatique avec BorgBackup

Nouveau dans la version 3.9.

Weblate est conçu pour supporter la création de services de sauvegarde avec [BorgBackup](#). Borg crée des sauvegardes chiffrées pouvant être stockées en sécurité dans le cloud. Ces sauvegardes peuvent être contrôlées depuis l'onglet *Backups* de l'interface de gestion.

Modifié dans la version 4.4.1 : Les bases de données PostgreSQL et MySQL/MariaDB sont incluses dans les sauvegardes automatisées.

Les sauvegardes avec Borg sont incrémentales et Weblate est configuré pour conserver les sauvegardes suivantes :

- Sauvegardes quotidiennes des 14 derniers jours
- Weekly backups for 8 weeks back
- Sauvegardes mensuelles des 6 derniers mois

Weblate
Dashboard
Projects
Languages
Checks

Manage / Backups

Backup process triggered

Weblate status
Backups
Translation memory
Performance report
SSH keys
Alerts
Repositories
Users
Appearance
Tools
Billing

Backup service: /tmp/tmplsx6y85uweblate

Backup service credentials

Feb. 25, 2022

Backup repository

/tmp/tmplsx6y85uweblate

Passphrase

ptQ&rq5YPk\$FEgfv7fI88yJ4PxZ044eqbd8rg@eUI1kPsXE)9E

The passphrase is used to encrypt the backups and is necessary to restore them.

SSH key

Download private key

The private key is needed to access the remote backup repository.

Deleted the oldest backups

Feb. 25, 2022

Backup performed

Feb. 25, 2022

Repository initialization

Feb. 25, 2022

Turn off
Perform backup
Delete

Activate support package

The support packages include priority e-mail support, or cloud backups of your Weblate installation.

Activation token

Please enter the activation token obtained when making the subscription.

Activate

Purchase support package

Add backup service

Backup repository URL

Use /path/to/repo for local backups or user@host:/path/to/repo or ssh://user@host:port/path/to/backups for remote SSH backups.

Add

Powered by Weblate 4.11
About Weblate
Legal
Contact
Documentation
Donate to Weblate

## Clé de chiffrement Borg

**BorgBackup** crée des sauvegardes chiffrées et, sans phrase de passe, vous ne serez pas en mesure de les restaurer. La phrase de passe est générée à l'ajout d'un nouveau service de sauvegarde. Vous devriez la copier et la conserver en lieu sûr.

Si jamais vous utilisez *Espace de sauvegarde provisionné par Weblate*, merci de sauvegarder aussi votre clé SSH privée – elle est utilisée pour accéder à vos sauvegardes.

**Voir aussi :**

`borg init`

## Customizing backup

- The database backup can be configured via `DATABASE_BACKUP`.
- The backup creation can be customized using `BORG_EXTRA_ARGS`.

### 2.4.2 Espace de sauvegarde provisionné par Weblate

La manière la plus simple de sauvegarder votre instance Weblate est de s'offrir le [service de sauvegarde de weblate.org](https://weblate.org/support/#backup). La procédure d'activation peut être effectuée en quelques étapes :

1. Purchase the *Backup service* on <https://weblate.org/support/#backup>.
2. Entrez la clé obtenue dans l'interface de gestion, voir *Intégration de l'assistance*.
3. Weblate connects to the cloud service and obtains access info for the backups.
4. Turn on the new backup configuration from the *Backups* tab.
5. Sauvegarder les identifiants Borg pour être en mesure de restaurer les sauvegardes. Voir : ref :*borg-keys*.

---

**Indication :** L'étape manuelle d'activation est nécessaire pour votre sécurité. Sans votre consentement, aucune donnée n'est envoyée au dépôt de sauvegarde obtenu par la procédure d'inscription.

---

### 2.4.3 Utiliser un espace de stockage personnalisé

Vous pouvez aussi utiliser votre propre espace de stockage pour vos sauvegardes. SSH peut être utilisé pour stocker les sauvegardes à distance ; dans ce cas, **BorgBackup** doit être installé sur le serveur cible.

**Voir aussi :**

[General](#) dans la documentation de Borg

## Système de fichiers local

Il est recommandé de spécifier le chemin absolu de la sauvegarde locale, par exemple `/chemin/vers/la/sauvegarde`. L'utilisateur qui fait tourner Weblate doit avoir les permissions d'écriture sur le répertoire. Voir *Permissions du système de fichiers*. Si le répertoire n'existe pas, Weblate essaiera de le créer, mais devra disposer des permissions nécessaires pour ce faire.

---

**Indication :** When running Weblate in Docker, please ensure the backup location is exposed as a volume from the Weblate container. Otherwise the backups will be discarded by Docker upon restarting the container it is in.

One option is to place backups into an existing volume, for example `/app/data/borgbackup`. This is an existing volume in the container.

You can also add a new container for the backups in the Docker Compose file for example by using `/borgbackup` :

```
services:
  weblate:
    volumes:
      - /home/weblate/data:/app/data
      - /home/weblate/borgbackup:/borgbackup
```

The directory where backups will be stored have to be owned by UID 1000, otherwise Weblate won't be able to write the backups there.

---

### Sauvegardes à distance

For creating remote backups, you will have to install [BorgBackup](#) onto another server that's accessible for your Weblate deployment via SSH using the Weblate SSH key :

1. Prepare a server where your backups will be stored.
2. Install the SSH server on it (you will get it by default with most Linux distributions).
3. Installez [BorgBackup](#) sur ce serveur ; la plupart des distributions Linux disposent des paquets nécessaires (voir [Installation](#)).
4. Choose an existing user or create a new user that will be used for backing up.
5. Add Weblate SSH key to the user so that Weblate can SSH to the server without a password (see [Weblate SSH key](#)).
6. Configure the backup location in Weblate as `user@host:/path/to/backups` or `ssh://user@host:port/path/to/backups`.

---

**Indication :** *Espace de sauvegarde provisionné par Weblate* provides you automated remote backups without any effort.

---

#### Voir aussi :

[Weblate SSH key](#), [General](#)

### 2.4.4 Restaurer une sauvegarde depuis BorgBackup

1. Restaurer l'accès au répertoire de sauvegarde et préparer la phrase de passe.
2. List all the backups on the server using `borg list REPOSITORY`.
3. Restore the desired backup to the current directory using `borg extract REPOSITORY::ARCHIVE`.
4. Restaurer la base de données depuis un dump SQL place dans le répertoire backup dans le répertoire de données de Weblate. Voir [Données supprimées pour les sauvegardes](#)).
5. Copy the Weblate configuration (`backups/settings.py`, see [Données supprimées pour les sauvegardes](#)) to the correct location, see [Ajuster la configuration](#).  
When using Docker container, the settings file is already included in the container and you should restore the original environment variables. The `environment.yml` file might help you with this (see [Données supprimées pour les sauvegardes](#)).
6. Copy the whole restored data dir to the location configured by `DATA_DIR`.  
When using Docker container place the data into the data volume, see [Docker container volumes](#).  
Please make sure the files have correct ownership and permissions, see [Permissions du système de fichiers](#).

The Borg session might look like this :

```
$ borg list /tmp/xxx
Enter passphrase for key /tmp/xxx:
2019-09-26T14:56:08          Thu, 2019-09-26 14:56:08_
→ [de0e0f13643635d5090e9896bdaceb92a023050749ad3f3350e788f1a65576a5]
$ borg extract /tmp/xxx::2019-09-26T14:56:08
Enter passphrase for key /tmp/xxx:
```

**Voir aussi :**

`borg list`, `borg extract`

## 2.4.5 Sauvegarde manuelle

Depending on what you want to save, back up the type of data Weblate stores in each respective place.

**Indication :** If you are doing the manual backups, you might want to silence Weblate's warning about a lack of backups by adding `weblate.I028` to `SILENCED_SYSTEM_CHECKS` in `settings.py` or `WE-BLATE_SILENCED_SYSTEM_CHECKS` for Docker.

```
SILENCED_SYSTEM_CHECKS.append("weblate.I028")
```

## Base de données

La destination de stockage utilisée dépend de la configuration de votre base de données.

**Indication :** The database is the most important storage. Set up regular backups of your database. Without the database, all the translations are gone.

## Sauvegarde native de base de données

The recommended approach is to save a dump of the database using database-native tools such as `pg_dump` or `mysqldump`. It usually performs better than Django backup, and it restores complete tables with all their data.

You can restore this backup in a newer Weblate release, it will perform all the necessary migrations when running in `migrate`. Please consult *Mise à niveau de Weblate* on more detailed info on how to upgrade between versions.

## Sauvegarde de base de données Django

Alternatively, you can back up your database using Django's `dumpdata` command. That way the backup is database agnostic and can be used in case you want to change the database backend.

Prior to restoring the database you need to be running exactly the same Weblate version the backup was made on. This is necessary as the database structure does change between releases and you would end up corrupting the data in some way. After installing the same version, run all database migrations using `migrate`.

Afterwards some entries will already be created in the database and you will have them in the database backup as well. The recommended approach is to delete such entries manually using the management shell (see *Invoking management commands*) :

```
weblate shell
>>> from weblate.auth.models import User
>>> User.objects.get(username='anonymous').delete()
```

### Fichiers

If you have enough backup space, simply back up the whole `DATA_DIR`. This is a safe bet even if it includes some files you don't want. The following sections describe what you should back up and what you can skip in detail.

### Données supprimées pour les sauvegardes

Modifié dans la version 4.7 : The environment dump was added as `environment.yml` to help in restoring in the Docker environments.

Stocké dans `DATA_DIR/backups`.

Weblate dépose diverses données ici, et vous pouvez inclure ces fichiers pour des sauvegardes plus complètes. Les fichiers sont mis à jour quotidiennement (nécessite un serveur Celery beats fonctionnel, voir [Background tasks using Celery](#)). Actuellement, ceci inclut :

- Les paramètres Weblate comme `settings.py` (il existe aussi une version étendue dans `settings-expanded.py`).
- La sauvegarde de la base de données PostgreSQL comme `database.sql`.
- Environment dump as `environment.yml`.

The database backups are saved as plain text by default, but they can also be compressed or entirely skipped using `DATABASE_BACKUP`.

To restore the database backup load it using database tools, for example :

```
psql --file=database.sql weblate
```

### Dépôts des contrôles de version

Stockés dans `DATA_DIR/vcs`.

The version control repositories contain a copy of your upstream repositories with Weblate changes. If you have [Pousser lors de l'archivage](#) enabled for all your translation components, all Weblate changes are included upstream. No need to back up the repositories on the Weblate side as they can be cloned again from the upstream location(s) with no data loss.

### Clés SSH et GPG

Stocké dans `DATA_DIR/ssh` et `DATA_DIR/home`.

If you are using SSH or GPG keys generated by Weblate, you should back up these locations. Otherwise you will lose the private keys and you will have to regenerate new ones.

### Fichiers téléversés par les utilisateurs

Stocké dans `DATA_DIR/media`.

You should back up all user uploaded files (e.g. [Visual context for strings](#)).



## Tâches Celery

The Celery task queue might contain some info, but is usually not needed for a backup. At most you will lose updates not yet been processed to translation memory. It is recommended to perform the fulltext or repository update upon restoration anyhow, so there is no problem in losing these.

**Voir aussi :**

*Background tasks using Celery*

## Sauvegarde manuelle en ligne de commande

Using a cron job, you can set up a Bash command to be executed on a daily basis, for example :

```
$ XZ_OPT="-9" tar -Jcf ~/backup/weblate-backup-$(date -u +%Y-%m-%d_%H%M%S).xz_
↪backups vcs ssh home media fonts secret
```

The string between the quotes after `XZ_OPT` allows you to choose your xz options, for instance the amount of memory used for compression ; see <https://linux.die.net/man/1/xz>

You can adjust the list of folders and files to your needs. To avoid saving the translation memory (in backups folder), you can use :

```
$ XZ_OPT="-9" tar -Jcf ~/backup/weblate-backup-$(date -u +%Y-%m-%d_%H%M%S).xz_
↪backups/database.sql backups/settings.py vcs ssh home media fonts secret
```

### 2.4.6 Restaurer une sauvegarde mauelle

1. Restaurer toutes les données que vous avez sauvegardées.
2. Mettre à jour tous les répertoires en utilisant `updategit`.

```
weblate updategit --all
```

### 2.4.7 Déplacer une installation Weblate

Relocate your installation to a different system by following the backing up and restoration instructions above.

**Voir aussi :**

*Upgrading from Python 2 to Python 3, Migrating from other databases to PostgreSQL*

## 2.5 Authentification

### 2.5.1 Enregistrement utilisateur

La configuration par défaut est d'utiliser python-social-auth, un formulaire web pour gérer les inscriptions de nouveaux utilisateurs. Après confirmation de son e-mail, on peut contribuer et s'authentifier en utilisant des services tiers.

Vous pouvez aussi désactiver les inscriptions de nouveaux utilisateurs en utilisant `REGISTRATION_OPEN`.

Le nombre de tentatives d'authentification est sujet à *Limite de requêtes*.

## 2.5.2 Backends d'authentification

La solution intégrée de Django est utilisée pour l'authentification, et inclue différents services sociaux pour le faire. Son utilisation signifie que vous pouvez importer la base de données d'utilisateurs d'autres projets basés sur Django (voir *Migrating from Pootle*).

De plus Django peut aussi être configuré pour utiliser d'autres méthodes d'authentification.

**Voir aussi :**

*Paramètres d'authentification* décrit comment configurer l'authentification sur l'image Docker officielle.

## 2.5.3 Authentification sociale

Grâce à [Welcome to Python Social Auth's documentation](#) !, Weblate supporte l'authentification par différents services tiers comme GitLab, Ubuntu, Fedora, etc.

Merci de consulter leur documentation pour des instructions de configuration générique dans [Django Framework](#).

---

**Note :** Par défaut, Weblate sur des services tiers d'authentification pour confirmer les adresses e-mail. Si certains services de votre choix ne le supportent pas, merci d'imposer la confirmation de l'email en configurant `FORCE_EMAIL_VALIDATION`. Par exemple :

```
SOCIAL_AUTH_OPENSUSE_FORCE_EMAIL_VALIDATION = True
```

**Voir aussi :**

[Pipeline](#)

---

Activer d'autres backends est plutôt simple, il suffit d'ajouter une ligne à `AUTHENTICATION_BACKENDS` et les clés nécessaires à une méthode d'authentification donnée. Notez que certains backends ne fournissent pas d'adresse e-mail utilisateur par défaut, vous devez la demander explicitement, sinon Weblate ne sera pas en mesure de créditer les contributions des utilisateurs comme il se doit.

---

**Indication :** Most of the authentication backends require HTTPS. Once HTTPS is enabled in your web server please configure Weblate to report it properly using `ENABLE_HTTPS`, or by `WEBLATE_ENABLE_HTTPS` in the Docker container.

---

**Voir aussi :**

[Python Social Auth backend](#)

## Authentification OpenID

Pour les services reposant sur OpenID il n'y a généralement qu'à les activer. La section suivante active l'authentification avec OpenID pour OpenSUSE, Fedora et Ubuntu :

```
# Authentication configuration
AUTHENTICATION_BACKENDS = (
    "social_core.backends.email.EmailAuth",
    "social_core.backends.suse.OpenSUSEOpenId",
    "social_core.backends.ubuntu.UbuntuOpenId",
    "social_core.backends.fedora.FedoraOpenId",
    "weblate.accounts.auth.WeblateUserBackend",
)
```

**Voir aussi :**

[OpenID](#)

---

## S'authentifier avec GitHub

Vous devez créer une application OAuth sur Github et confier à Weblate tous ses petits secrets :

```
# Authentication configuration
AUTHENTICATION_BACKENDS = (
    "social_core.backends.github.GithubOAuth2",
    "social_core.backends.email.EmailAuth",
    "weblate.accounts.auth.WeblateUserBackend",
)

# Social auth backends setup
SOCIAL_AUTH_GITHUB_KEY = "GitHub Client ID"
SOCIAL_AUTH_GITHUB_SECRET = "GitHub Client Secret"
SOCIAL_AUTH_GITHUB_SCOPE = ["user:email"]
```

Le compte GitHub doit avoir une callback URL configurée tel que : `https://example.com/accounts/complete/github/`.

---

**Note :** La callback URL fournie par Weblate pendant l'authentification inclue le domaine configuré. En cas d'erreurs sur l'URL, vous devriez pouvoir arranger cela. Voir *Set correct site domain*.

---

**Voir aussi :**

[GitHub](#)

## S'authentifier avec Bitbucket

Vous devez créer une application sur Bitbucket et confier à Weblate tous ses petits secrets :

```
# Authentication configuration
AUTHENTICATION_BACKENDS = (
    "social_core.backends.bitbucket.BitbucketOAuth",
    "social_core.backends.email.EmailAuth",
    "weblate.accounts.auth.WeblateUserBackend",
)

# Social auth backends setup
SOCIAL_AUTH_BITBUCKET_KEY = "Bitbucket Client ID"
SOCIAL_AUTH_BITBUCKET_SECRET = "Bitbucket Client Secret"
SOCIAL_AUTH_BITBUCKET_VERIFIED_EMAILS_ONLY = True
```

---

**Note :** La callback URL fournie par Weblate pendant l'authentification inclue le domaine configuré. En cas d'erreurs sur l'URL, vous devriez pouvoir arranger cela. Voir *Set correct site domain*.

---

**Voir aussi :**

[Bitbucket](#)

## Google OAuth 2

Pour utiliser Google OAuth 2, vous devez enregistrer une application sur <<https://console.developers.google.com/>> et activer l'API Google+.

L'URL de redirection est `https://WEBLATE_SERVER/accounts/complete/google-oauth2/`

```
# Authentication configuration
AUTHENTICATION_BACKENDS = (
    "social_core.backends.google.GoogleOAuth2",
    "social_core.backends.email.EmailAuth",
    "weblate.accounts.auth.WeblateUserBackend",
)

# Social auth backends setup
SOCIAL_AUTH_GOOGLE_OAUTH2_KEY = "Client ID"
SOCIAL_AUTH_GOOGLE_OAUTH2_SECRET = "Client secret"
```

---

**Note :** La callback URL fournie par Weblate pendant l'authentification inclue le domaine configuré. En cas d'erreurs sur l'URL, vous devriez pouvoir arranger cela. Voir *[Set correct site domain](#)*.

---

**Voir aussi :**

[Google](#)

## Facebook OAuth 2

Comme d'habitude avec les services OAuth 2, vous devez enregistrer une application chez Facebook. Une fois que c'est fait, vous pouvez configurer Weblate pour l'utiliser :

L'URL de redirection est `https://WEBLATE_SERVER/accounts/complete/facebook/`

```
# Authentication configuration
AUTHENTICATION_BACKENDS = (
    "social_core.backends.facebook.FacebookOAuth2",
    "social_core.backends.email.EmailAuth",
    "weblate.accounts.auth.WeblateUserBackend",
)

# Social auth backends setup
SOCIAL_AUTH_FACEBOOK_KEY = "key"
SOCIAL_AUTH_FACEBOOK_SECRET = "secret"
SOCIAL_AUTH_FACEBOOK_SCOPE = ["email", "public_profile"]
```

---

**Note :** La callback URL fournie par Weblate pendant l'authentification inclue le domaine configuré. En cas d'erreurs sur l'URL, vous devriez pouvoir arranger cela. Voir *[Set correct site domain](#)*.

---

**Voir aussi :**

[Facebook](#)

## GitLab OAuth 2

Pour utiliser GitLab OAuth 2, vous devez enregistrer une application sur <<https://gitlab.com/profile/applications>>.

L'URL de redirection est `https://WEBLATE_SERVER/accounts/complete/gitlab/` and ensure you mark the `read_user` scope.

```
# Authentication configuration
AUTHENTICATION_BACKENDS = (
    "social_core.backends.gitlab.GitLabOAuth2",
    "social_core.backends.email.EmailAuth",
    "weblate.accounts.auth.WeblateUserBackend",
)

# Social auth backends setup
SOCIAL_AUTH_GITLAB_KEY = "Application ID"
SOCIAL_AUTH_GITLAB_SECRET = "Secret"
SOCIAL_AUTH_GITLAB_SCOPE = ["read_user"]

# If you are using your own GitLab
# SOCIAL_AUTH_GITLAB_API_URL = 'https://gitlab.example.com/'
```

**Note :** La callback URL fournie par Weblate pendant l'authentification inclue le domaine configuré. En cas d'erreurs sur l'URL, vous devriez pouvoir arranger cela. Voir *Set correct site domain*.

**Voir aussi :**

GitLab

## Active Directory Microsoft Azure

Weblate peut être configuré pour utiliser des tenants communs ou spécifiques à l'authentification.

L'URL de redirection est `https://WEBLATE_SERVER/accounts/complete/azuread-oauth2/` pour les communs et `https://WEBLATE_SERVER/accounts/complete/azuread-tenant-oauth2/` pour les tenants spécifiques à l'authentification.

```
# Azure AD common

# Authentication configuration
AUTHENTICATION_BACKENDS = (
    "social_core.backends.azuread.AzureADOAuth2",
    "social_core.backends.email.EmailAuth",
    "weblate.accounts.auth.WeblateUserBackend",
)

# OAuth2 keys
SOCIAL_AUTH_AZUREAD_OAUTH2_KEY = ""
SOCIAL_AUTH_AZUREAD_OAUTH2_SECRET = ""
```

```
# Azure AD Tenant

# Authentication configuration
AUTHENTICATION_BACKENDS = (
    "social_core.backends.azuread_tenant.AzureADTenantOAuth2",
    "social_core.backends.email.EmailAuth",
    "weblate.accounts.auth.WeblateUserBackend",
)

# OAuth2 keys
```

(suite sur la page suivante)

(suite de la page précédente)

```
SOCIAL_AUTH_AZUREAD_TENANT_OAUTH2_KEY = ""
SOCIAL_AUTH_AZUREAD_TENANT_OAUTH2_SECRET = ""
# Tenant ID
SOCIAL_AUTH_AZUREAD_TENANT_OAUTH2_TENANT_ID = ""
```

---

**Note :** La callback URL fournie par Weblate pendant l'authentification inclue le domaine configuré. En cas d'erreurs sur l'URL, vous devriez pouvoir arranger cela. Voir [Set correct site domain](#).

---

### Voir aussi :

[Microsoft Azure Active Directory](#)

## Slack

Pour utiliser OAuth 2 avec Slack, vous devez enregistrer une application sur [<https://api.slack.com/apps>](https://api.slack.com/apps).

L'URL de redirection est `https://WEBLATE_SERVER/accounts/complete/slack/`.

```
# Authentication configuration
AUTHENTICATION_BACKENDS = (
    "social_core.backends.slack.SlackOAuth2",
    "social_core.backends.email.EmailAuth",
    "weblate.accounts.auth.WeblateUserBackend",
)

# Social auth backends setup
SOCIAL_AUTH_SLACK_KEY = ""
SOCIAL_AUTH_SLACK_SECRET = ""
```

---

**Note :** La callback URL fournie par Weblate pendant l'authentification inclue le domaine configuré. En cas d'erreurs sur l'URL, vous devriez pouvoir arranger cela. Voir [Set correct site domain](#).

---

### Voir aussi :

[Slack](#)

## Overriding authentication method names and icons

You can override the authentication method display name and icon using settings as `SOCIAL_AUTH_<NAME>_IMAGE` and `SOCIAL_AUTH_<NAME>_TITLE`. For example overriding naming for Auth0 would look like :

```
SOCIAL_AUTH_AUTH0_IMAGE = "custom.svg"
SOCIAL_AUTH_AUTH0_TITLE = "Custom auth"
```

## Désactiver l'authentification par mot de passe

L'authentification par e-mail et mot de passe peut être désactivée en supprimant `social_core.backends.email.EmailAuth` de `AUTHENTICATION_BACKENDS`. Conservez toujours `weblate.accounts.auth.WeblateUserBackend` là, c'est nécessaire pour les fonctionnalités essentielles de Weblate.

Disabling e-mail authentication will disable all e-mail related functionality – user invitation or password reset feature.

---

**Astuce :** You can still use password authentication for the admin interface, for users you manually create there. Just navigate to `/admin/login/`.

---

Par exemple, l'authentification utilisant seulement openSUSE OpenID peut être réalisée comme suit :

```
# Authentication configuration
AUTHENTICATION_BACKENDS = (
    "social_core.backends.suse.OpenSUSEOpenId",
    "weblate.accounts.auth.WeblateUserBackend",
)
```

## 2.5.4 S'authentifier par mot de passe

Le fichier par défaut `settings.py` vient avec un ensemble raisonnable de `AUTH_PASSWORD_VALIDATORS` :

- Les mots de passe ne peuvent être similaires aux autres informations personnelles.
- Les mots de passe doivent contenir au moins 10 caractères.
- Les mots de passe ne peuvent être communément employés.
- Les mots de passe ne peuvent être entièrement numériques.
- Les mots de passe ne peuvent consister en un seul caractère ou que des espaces.
- Les mots de passe ne peuvent contenir un mot de passe utilisé dans le passé.

Vous pouvez personnaliser ces paramètres pour les faire correspondre à votre politique de mots de passe.

De plus vous pouvez aussi installer `django-zxcvbn-password` qui donne une estimation plutôt réaliste de la complexité d'un mot de passe et permet de les rejeter en dessous d'un certain seuil.

## 2.5.5 S'authentifier avec SAML

Nouveau dans la version 4.1.1.

Merci de suivre les instructions d'authentification sociale spécifiques à python pour la configuration. Différences notable :

- Weblate supporte single IDP qui doit être appelé `weblate` dans `SOCIAL_AUTH_SAML_ENABLED_IDPS`.
- L'URL SAML de métadonnées XML est `/accounts/metadata/saml/`.
- Les paramètres suivants sont automatiquement remplis dans : `SOCIAL_AUTH_SAML_SP_ENTITY_ID`, `SOCIAL_AUTH_SAML_TECHNICAL_CONTACT`, `SOCIAL_AUTH_SAML_SUPPORT_CONTACT`

Exemple de configuration :

```
# Authentication configuration
AUTHENTICATION_BACKENDS = (
    "social_core.backends.email.EmailAuth",
    "social_core.backends.saml.SAMLAuth",
    "weblate.accounts.auth.WeblateUserBackend",
)

# Social auth backends setup
SOCIAL_AUTH_SAML_SP_ENTITY_ID = f"https://{SITE_DOMAIN}/accounts/metadata/saml/"
SOCIAL_AUTH_SAML_SP_PUBLIC_CERT = "-----BEGIN CERTIFICATE-----"
SOCIAL_AUTH_SAML_SP_PRIVATE_KEY = "-----BEGIN PRIVATE KEY-----"
```

(suite sur la page suivante)

(suite de la page précédente)

```
SOCIAL_AUTH_SAML_ENABLED_IDPS = {
    "weblate": {
        "entity_id": "https://idp.testshib.org/idp/shibboleth",
        "url": "https://idp.testshib.org/idp/profile/SAML2/Redirect/SSO",
        "x509cert": "MIIEDjCCAvagAwIBAgIBADA ... 8Bbn1+ev0peYzxFyF5sQA==",
        "attr_name": "full_name",
        "attr_username": "username",
        "attr_email": "email",
    }
}
SOCIAL_AUTH_SAML_ORG_INFO = {
    "en-US": {
        "name": "example",
        "displayname": "Example Inc.",
        "url": "http://example.com"
    }
}
SOCIAL_AUTH_SAML_TECHNICAL_CONTACT = {
    "givenName": "Tech Gal",
    "emailAddress": "technical@example.com"
}
SOCIAL_AUTH_SAML_SUPPORT_CONTACT = {
    "givenName": "Support Guy",
    "emailAddress": "support@example.com"
}
```

The default configuration extracts user details from following attributes, configure your IDP to provide them :

Attribute	SAML URI reference
Nom complet	urn:oid:2.5.4.3
Prénom	urn:oid:2.5.4.42
Last name	urn:oid:2.5.4.4
Adresse courriel	urn:oid:0.9.2342.19200300.100.1.3
Nom d'utilisateur	urn:oid:0.9.2342.19200300.100.1.1

---

**Indication :** The example above and the Docker image define an IDP labelled *weblate*. You might need to configure this string as *Relay* in your IDP.

---

**Voir aussi :**

*Configuring SAML in Docker*, [SAML](#)

## 2.5.6 S'authentifier avec LDAP

C'est mieux de s'authentifier avec LDAP en utilisant le paquet *django-auth-ldap*. Vous pouvez l'installer comme d'habitude :

```
# Using PyPI
pip install django-auth-ldap>=1.3.0

# Using apt-get
apt-get install python-django-auth-ldap
```

---

**Indication :** This package is included in the Docker container, see *Installing using Docker*.

---



**Note :** Il y a quelques incompatibilités dans le module Python LDAP 3.1.0, qui peuvent vous empêcher d'utiliser cette version. Si vous obtenez l'erreur `AttributeError : "module" object has no attribute "_trace_level"`, rétrograder python-ldap en 3.0.0 pourrait aider.

Une fois que le paquet est installé, vous pouvez le relier à l'authentification Django :

```
# Add LDAP backed, keep Django one if you want to be able to sign in
# even without LDAP for admin account
AUTHENTICATION_BACKENDS = (
    "django_auth_ldap.backend.LDAPBackend",
    "weblate.accounts.auth.WeblateUserBackend",
)

# LDAP server address
AUTH_LDAP_SERVER_URI = "ldaps://ldap.example.net"

# DN to use for authentication
AUTH_LDAP_USER_DN_TEMPLATE = "cn=%(user)s,o=Example"
# Depending on your LDAP server, you might use a different DN
# like:
# AUTH_LDAP_USER_DN_TEMPLATE = 'ou=users,dc=example,dc=com'

# List of attributes to import from LDAP upon sign in
# Weblate stores full name of the user in the full_name attribute
AUTH_LDAP_USER_ATTR_MAP = {
    "full_name": "name",
    # Use the following if your LDAP server does not have full name
    # Weblate will merge them later
    # 'first_name': 'givenName',
    # 'last_name': 'sn',
    # Email is required for Weblate (used in VCS commits)
    "email": "mail",
}

# Hide the registration form
REGISTRATION_OPEN = False
```

**Note :** Vous devriez supprimer `'social_core.backends.email.EmailAuth'` du paramètre `AUTHENTICATION_BACKENDS`, sinon les utilisateurs seront en mesure de créer un mot de passe sur Weblate et de s'authentifier avec. Garder `'weblate.accounts.auth.WeblateUserBackend'` est encore nécessaire pour gérer les permissions et permettre l'utilisation anonyme. Cela permet aussi de s'identifier avec un compte admin local, si vous en avez créé un (p. ex. en utilisant `createadmin`).

## En utilisant le mot de passe bind

Si vous ne pouvez pas utiliser la liaison directe pour l'authentification, vous devrez utiliser la recherche, et fournir un utilisateur à lier pour la recherche. Par exemple :

```
import ldap
from django_auth_ldap.config import LDAPSearch

AUTH_LDAP_BIND_DN = ""
AUTH_LDAP_BIND_PASSWORD = ""
AUTH_LDAP_USER_SEARCH = LDAPSearch(
    "ou=users,dc=example,dc=com", ldap.SCOPE_SUBTREE, "(uid=%(user)s)"
)
```

## Intégration avec Active Directory

```
import ldap
from django_auth_ldap.config import LDAPSearch, NestedActiveDirectoryGroupType

AUTH_LDAP_BIND_DN = "CN=ldap,CN=Users,DC=example,DC=com"
AUTH_LDAP_BIND_PASSWORD = "password"

# User and group search objects and types
AUTH_LDAP_USER_SEARCH = LDAPSearch(
    "CN=Users,DC=example,DC=com", ldap.SCOPE_SUBTREE, "(sAMAccountName=%(user)s)"
)

# Make selected group a superuser in Weblate
AUTH_LDAP_USER_FLAGS_BY_GROUP = {
    # is_superuser means user has all permissions
    "is_superuser": "CN=weblate_AdminUsers,OU=Groups,DC=example,DC=com",
}

# Map groups from AD to Weblate
AUTH_LDAP_GROUP_SEARCH = LDAPSearch(
    "OU=Groups,DC=example,DC=com", ldap.SCOPE_SUBTREE, "(objectClass=group)"
)
AUTH_LDAP_GROUP_TYPE = NestedActiveDirectoryGroupType()
AUTH_LDAP_FIND_GROUP_PERMS = True

# Optionally enable group mirroring from LDAP to Weblate
# AUTH_LDAP_MIRROR_GROUPS = True
```

### Voir aussi :

Django Authentication Using LDAP, Authentication

## 2.5.7 S'authentifier avec CAS

On peut s'authentifier avec CAS en utilisant un paquet comme *django-cas-ng*.

La première étape est de révéler le champ e-mail de l'utilisateur via CAS. Cela doit être configuré sur le serveur de CAS, et demande d'utiliser au moins CAS v2 vu que CAS v1 ne supporte pas du tout les attributs.

L'étape suivante est de mettre à jour Weblate pour utiliser votre serveur CAS et les attributs.

Pour installer *django-cas-ng* :

```
pip install django-cas-ng
```

Une fois que le paquet est installé vous pouvez relier au système d'authentification Django en modifiant le fichier `settings.py` :

```
# Add CAS backed, keep the Django one if you want to be able to sign in
# even without LDAP for the admin account
AUTHENTICATION_BACKENDS = (
    "django_cas_ng.backends.CASBackend",
    "weblate.accounts.auth.WeblateUserBackend",
)

# CAS server address
CAS_SERVER_URL = "https://cas.example.net/cas/"

# Add django_cas_ng somewhere in the list of INSTALLED_APPS
INSTALLED_APPS = (... , "django_cas_ng")
```

Au final, un signal peut être utilisé pour assigner le champ e-mail à l'objet utilisateur. Pour que cela fonctionne, vous devez importer le signal depuis le paquet *django-cas-ng* et connecter votre code à ce signal. Faire cette manipulation depuis les fichiers de configuration peut être problématique, alors on conseille de faire différemment :

- Dans la méthode `django.apps.AppConfig.ready()` de la configuration de l'application
- Dans le fichier `urls.py` du projet (quand il n'existe pas de modèle)

```
from django_cas_ng.signals import cas_user_authenticated
from django.dispatch import receiver

@receiver(cas_user_authenticated)
def update_user_email_address(sender, user=None, attributes=None, **kwargs):
    # If your CAS server does not always include the email attribute
    # you can wrap the next two lines of code in a try/catch block.
    user.email = attributes["email"]
    user.save()
```

**Voir aussi :**

Django CAS NG

## 2.5.8 Configurer l'authentification Django avec des services tiers

Généralement n'importe quel module d'authentification Django devrait fonctionner avec Weblate. Il suffit de suivre les instructions du module et de se rappeler de conserver le backend utilisateur de Weblate.

**Voir aussi :**

*S'authentifier avec LDAP, S'authentifier avec CAS*

Typiquement l'installation va consister à l'ajout d'un backend d'authentification à `AUTHENTICATION_BACKENDS` et l'installation d'une app d'authentification (s'il y en a une) dans `INSTALLED_APPS` :

```
AUTHENTICATION_BACKENDS = (
    # Add authentication backend here
    "weblate.accounts.auth.WeblateUserBackend",
)

INSTALLED_APPS += (
    # Install authentication app here
)
```

## 2.6 Contrôle d'accès

Weblate est doté d'un système de privilèges précis permettant d'attribuer des autorisations d'accès à l'ensemble de l'instance ou à une partie limitée de celle-ci.

Modifié dans la version 3.0 : Avant Weblate 3.0, le système de privilèges était uniquement basé sur celui de Django, mais il est maintenant spécifiquement construit pour Weblate. Si vous utilisez une version plus ancienne, veuillez consulter la documentation pour la version spécifique que vous utilisez.

## 2.6.1 Contrôle d'accès simple

Si vous n'administrez pas toute l'installation de Weblate et que vous avez juste accès à la gestion de certains projets (comme sur [Weblate hébergé](#)), vos options de gestion de contrôle d'accès sont limitées aux paramètres suivants. Si vous n'avez pas besoin d'une configuration complexe, ceux-ci sont suffisants pour vous.

### Contrôle d'accès au projet

**Note :** Cette fonctionnalité n'est pas disponible pour les projets utilisant le plan Libre sur Hosted Weblate.

Vous pouvez limiter les accès d'un utilisateur à des projets individuels en sélectionnant un *Contrôle d'accès* différent. Les options disponibles sont :


**Public** Visible publiquement, traduisible par les tous les utilisateurs connectés.

**Protégé** Visible publiquement, mais traduisible uniquement pour les utilisateurs sélectionnés.

**Privé** Visible et traduisible uniquement pour les utilisateurs sélectionnés.

**Personnalisé** Les fonctionnalités *Gestion d'utilisateurs* seront désactivées ; par défaut, les utilisateurs ne peuvent faire aucune action sur le projet. Vous devrez paramétrer toutes les autorisations en utilisant *Contrôle d'accès personnalisé*.

Les *Contrôles d'accès* peuvent être changés dans l'onglet *Accès* dans la configuration (*Gestion* ↓ *Paramètres*) de chaque projet.

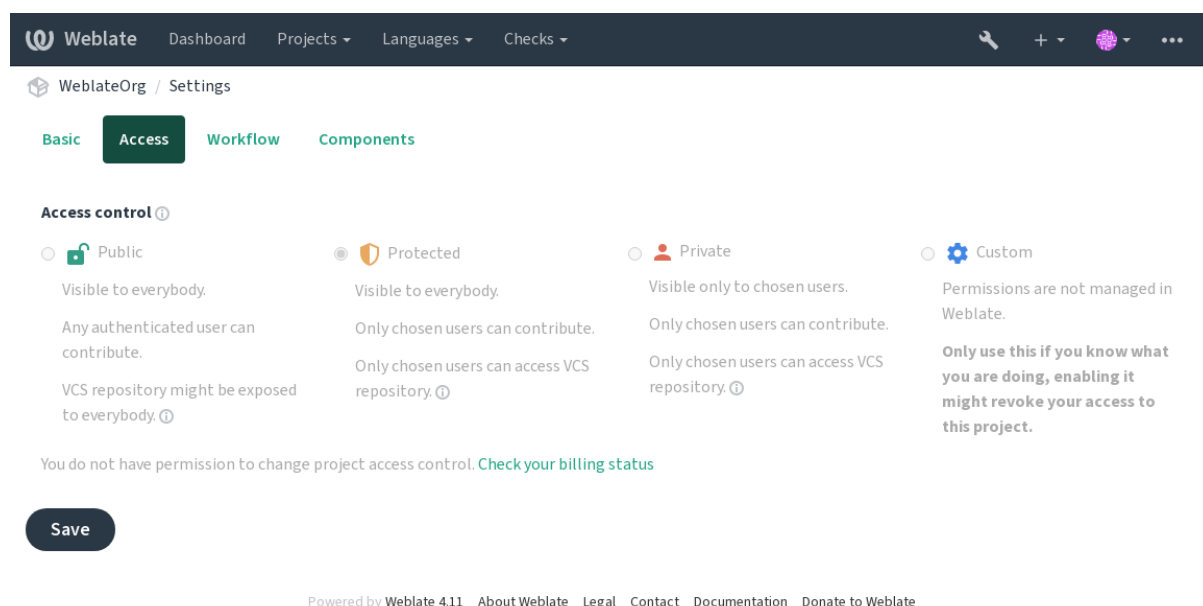

La valeur par défaut peut être modifiée avec `DEFAULT_ACCESS_CONTROL`.

**Note :** Même pour les projets *Privés*, certaines informations sur votre projet seront exposées : les résumés de statistiques et de langage pour toute la session incluront les décomptes pour tous les projets malgré le paramètre de contrôle d'accès. Votre nom de projet et d'autres informations ne peuvent pas être révélés par ce moyen.

**Note :** Les sets de permissions disponibles par défaut pour les utilisateurs dans les projets *Public*, *Protégé*, et *Privé* peuvent être redéfinis via l'instance administrateur de Weblate en utilisant *paramètres personnalisés*.

**Avertissement :** En activant la fonction de contrôle d'accès *personnalisée*, Weblate supprimera tous les *groupes spéciaux* qu'il a créés pour le projet sélectionné. Si vous faites cela sans les droits d'administration de l'instance Weblate, vous perdrez instantanément votre accès pour gérer le projet.

**Voir aussi :**

*Contrôle d'accès*

## Gestion du contrôle d'accès par projet

Users with the *Manage project access* privilege (see *List of privileges and built-in roles*) can manage users in projects via adding them to the teams. The initial set of teams is provided by Weblate, but additional ones can be defined providing more fine-grained access control. You can limit teams to languages and assign them design access roles (see *List of privileges and built-in roles*).

The following teams are automatically created for every project :

Pour les projets *Public*, *Protégé* et *Privé* :

**Administration** Inclut toutes les autorisations disponibles pour le projet.

**Révision (seulement si :ref :réviser le processus <reviews>` est activé)** Peut approuver les traductions lors de la révision.

For *Protected* and *Private* projects only :

**Traduire** Peut traduire le projet et téléverser des traductions effectuées hors ligne.

**Sources** Peut modifier des chaînes source (si autorisé par *project settings*) et les informations de chaîne source.

**Langues** Peut gérer les langues traduites (ajouter ou supprimer des traductions).

**Glossaire** Peut gérer le glossaire (ajouter ou supprimer des entrées, ou téléverser).

**Mémoire** Peut gérer le mémoire de traduction.

**Captures d'écran** Peut gérer les captures d'écran (les ajouter ou les supprimer, et les associer à des chaînes de caractères source).

**Traduction automatique** Can use automatic translation.

**Système de contrôle de versions** Peut gérer le système de contrôle des versions et accéder au dépôt exporté.

**Facturation** Peut accéder aux informations et paramètres de facturation (voir *Facturation*).

The screenshot shows the Weblate web interface. At the top is a dark navigation bar with the Weblate logo and links to Dashboard, Projects, Languages, and Checks. Below this is a breadcrumb trail: WeblateOrg / Access control. The main content area has three tabs: Users (selected), Teams, and API access. Below the tabs is a 'Users' table with columns: Username, Full name, E-mail, Last sign in, and Teams. The table contains one user: 'testuser' with full name 'Weblate Test' and email 'weblate@example.org'. Below the table is a note: 'Once all its permissions are removed, the user will be removed from the project.' To the right of the table are three forms: 'Add a user', 'Block user', and 'Invite new user'. The 'Add a user' form has a text input for 'User to add' and an 'Add' button. The 'Block user' form has a text input for 'User to block', a dropdown for 'Block duration' (set to 'Block user until I unblock them'), and a 'Block' button. The 'Invite new user' form has text inputs for 'E-mail', 'Username', and 'Full name', and an 'Invite' button. The footer of the interface contains links: Powered by Weblate 4.11, About Weblate, Legal, Contact, Documentation, and Donate to Weblate.

Ces fonctionnalités sont disponibles dans la page *Access control*, qui est accessible depuis le menu *Manage* ↓ *Users* du projet.

## Invitation de nouvel utilisateur

Also, besides adding an existing user to the project, it is possible to invite new ones. Any new user will be created immediately, but the account will remain inactive until signing in with a link in the invitation sent via an e-mail. It is not required to have any site-wide privileges in order to do so, access management permission on the project's scope (e.g. a membership in the *Administration* group) would be sufficient.

---

**Indication :** Si l'utilisateur invité a manqué la validité de l'invitation, il peut définir son mot de passe à l'aide de l'adresse courriel invitée dans le formulaire de réinitialisation du mot de passe puisque le compte est déjà créé.

---

Nouveau dans la version 3.11 : Il est possible de renvoyer le courriel d'invitation aux utilisateurs (cet envoi annule toutes les invitations envoyées précédemment).

Le même type d'invitations sont disponible partout sur le site depuis *management interface* dans l'onglet *Users*.

## Les utilisateurs bloqués

Nouveau dans la version 4.7.

Dans certains cas, des utilisateurs ont un mauvais comportement. Vous avez la possibilité de les empêcher de contribuer. L'utilisateur bloqué pourra toujours voir le projet s'il a les autorisations, mais il ne pourra plus contribuer.

## Gestion des droits par projet

Réglez vos projets sur *Protégé* ou *Privé*, et gérez les utilisateurs par projet dans l'interface Weblate.

By default this prevents Weblate from granting access provided by *Users* and *Viewers default groups* due to these groups' own configuration. This doesn't prevent you from granting permissions to those projects site-wide by altering default groups, creating a new one, or creating additional custom settings for individual component as described in *Contrôle d'accès personnalisé* below.

One of the main benefits of managing permissions through the Weblate user interface is that you can delegate it to other users without giving them the superuser privilege. In order to do so, add them to the *Administration* group of the project.

## 2.6.2 Contrôle d'accès personnalisé

---

**Note :** Cette fonctionnalité n'est pas disponible pour les projets utilisant le plan Libre sur Hosted Weblate.

---

Le système de permission est basé sur les groupes et les rôles, où les rôles définissent un ensemble de permissions, et les groupes les lient aux utilisateurs et aux traductions, consultez *Utilisateurs, rôles, groupes et droits* pour plus de détails.

The most powerful features of the Weblate's access control system for now are available only through the *Django admin interface*. You can use it to manage permissions of any project. You don't necessarily have to switch it to *Custom access control* to utilize it. However you must have superuser privileges in order to use it.

If you are not interested in details of implementation, and just want to create a simple-enough configuration based on the defaults, or don't have a site-wide access to the whole Weblate installation (like on *Hosted Weblate*), please refer to the *Contrôle d'accès simple* section.

## Configurations communes

Cette section contient un aperçu de certaines configurations courantes susceptibles de vous intéresser.

## Gestion des droits à l'échelle du site

To manage permissions for a whole instance at once, add users to appropriate *default groups* :

- *Users* (this is done by default by the *automatic group assignment*).
- *Reviewers* (if you are using *review workflow* with dedicated reviewers).
- *Managers* (if you want to delegate most of the management operations to somebody else).

You should keep all projects configured as *Public* (see *Contrôle d'accès au projet*), otherwise the site-wide permissions provided by membership in the *Users* and *Reviewers* groups won't have any effect.

You may also grant some additional permissions of your choice to the default groups. For example, you may want to give a permission to manage screenshots to all the *Users*.

You can define some new custom groups as well. If you want to keep managing your permissions site-wide for these groups, choose an appropriate value for the *Project selection* (e.g. *All projects* or *All public projects*).

## Autorisations personnalisées pour les langues, les composants ou les projets

Vous pouvez créer vos propres groupes dédiés pour gérer les autorisations pour des objets distincts tels que des langues, des composants et des projets. Bien que ces groupes ne puissent accorder que des privilèges supplémentaires, vous ne pouvez révoquer aucune autorisation accordée par des groupes à l'échelle du site ou par projet en ajoutant un autre groupe personnalisé.

### Exemple :

If you want (for whatever reason) to allow translation to a specific language (lets say *Czech*) only to a closed set of reliable translators while keeping translations to other languages public, you will have to :

1. Remove the permission to translate *Czech* from all the users. In the default configuration this can be done by altering the *Users default group*.

Tableau 1 – Groupe *Utilisateurs*

Sélection de la langue	<i>Tel que défini</i>
Langues	All but <i>Czech</i>

2. Add a dedicated group for *Czech* translators.

Tableau 2 – Groupe *Traducteurs tchèques*

Rôles	<i>Utilisateurs avancés</i>
Sélection de projets	<i>Tous les projets publics</i>
Sélection de la langue	<i>Tel que défini</i>
Langues	<i>Tchèque</i>

3. Ajoutez les utilisateurs auxquels vous souhaitez accorder les autorisations dans ce groupe.

Comme vous pouvez le voir, la gestion des autorisations de cette façon est puissante, mais peut être un travail assez fastidieux. Vous ne pouvez pas le déléguer à un autre utilisateur, sauf en accordant des autorisations de super-utilisateur.

## Utilisateurs, rôles, groupes et droits

Les modèles d'authentification se composent de plusieurs éléments :


**Droit** Droit individuel. Les droits ne peuvent pas être attribués à un utilisateur. Ils doivent être attribués via des rôles.

**Rôle** Un rôle définit un ensemble de droits. Ils peuvent être utilisés à plusieurs endroits pour faciliter l'administration.

**Utilisateur** Un utilisateur peut être membre de plusieurs groupes.

**Groupe** Un groupe relie les rôles, les utilisateurs et les éléments d'authentification (projets, langues et listes de composants).



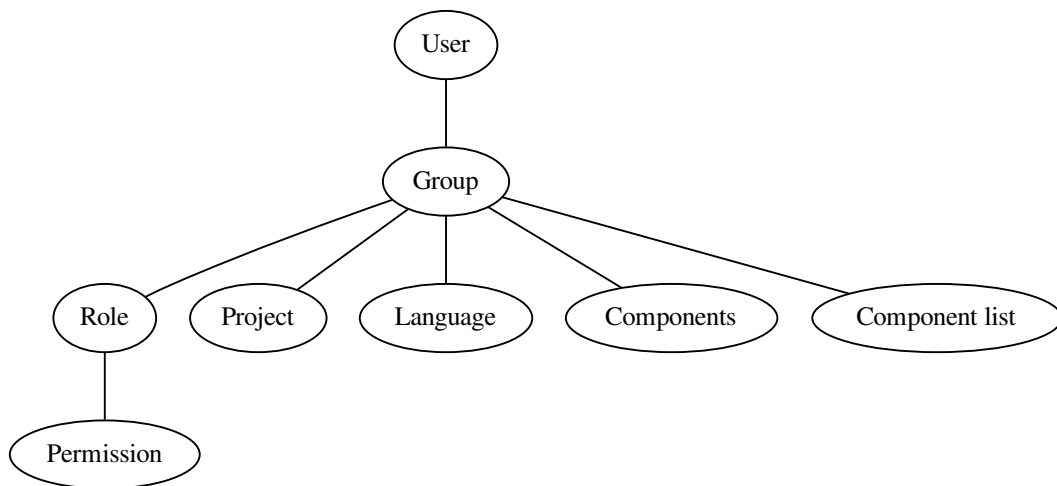


---

**Note :** Un groupe peut n'avoir aucun rôle assigné, dans ce cas l'accès à la navigation du projet par n'importe qui est supposé (voir ci-dessous).

---

### Accès pour parcourir un projet

Un utilisateur doit être membre d'un groupe lié au projet ou de l'un des composants. Il suffit d'être membre, aucune permission spécifique n'est nécessaire pour naviguer dans un projet (ceci est utilisé dans le groupe par défaut *Lecteurs*, voir *Liste de groupes*).

### Accès pour parcourir un composant

A user can access unrestricted components once able to access the components' project (and will have all the permissions the user was granted for the project). With *Accès restreint* turned on, access to the component requires explicit permissions for the component (or a component list the component is in).

### Portée des groupes

L'étendue de l'autorisation attribuée par les rôles dans les groupes est appliquée par les règles suivantes :

- If the group specifies any *Component list*, all the permissions given to members of that group are granted for all the components in the component lists attached to the group, and an access with no additional permissions is granted for all the projects these components are in. *Components* and *Projects* are ignored.
- If the group specifies any *Components*, all the permissions given to the members of that group are granted for all the components attached to the group, and an access with no additional permissions is granted for all the projects these components are in. *Projects* are ignored.
- Otherwise, if the group specifies any *Projects*, either by directly listing them or by having *Projects selection* set to a value like *All public projects*, all those permissions are applied to all the projects, which effectively grants the same permissions to access all projects *unrestricted components*.
- The restrictions imposed by a group's *Languages* are applied separately, when it's verified if a user has an access to perform certain actions. Namely, it's applied only to actions directly related to the translation process itself like reviewing, saving translations, adding suggestions, etc.

---

**Indication :** Utilisez *Sélection de la langue* ou *Sélection de projet* pour automatiser l'inclusion de toutes les langues ou projets.

---

**Exemple :**

Let's say there is a project `foo` with the components : `foo/bar` and `foo/baz` and the following group :

Tableau 3 – Group *Spanish Admin-Reviewers*

Rôles	<i>Réviser les chaînes, Gérer le dépôt</i>
Composants	<code>foo/bar</code>
Langues	<i>Espagnol</i>

Les membres de ce groupe auront les autorisations suivantes (en supposant les paramètres de rôle par défaut) :

- General (browsing) access to the whole project `foo` including both components in it : `foo/bar` and `foo/baz`.
- Review strings in `foo/bar` Spanish translation (not elsewhere).
- Manage VCS for the whole `foo/bar` repository e.g. commit pending changes made by translators for all languages.

## Affectations de groupe automatiques

On the bottom of the *Group* editing page in the *Django admin interface*, you can specify *Automatic group assignments*, which is a list of regular expressions used to automatically assign newly created users to a group based on their e-mail addresses. This assignment only happens upon account creation.

The most common use-case for the feature is to assign all new users to some default group. In order to do so, you will probably want to keep the default value (`^.*$`) in the regular expression field. Another use-case for this option might be to give some additional privileges to employees of your company by default. Assuming all of them use corporate e-mail addresses on your domain, this can be accomplished with an expression like `^.*@mycompany.com`.

---

**Note :** Automatic group assignment to *Users* and *Viewers* is always recreated when upgrading from one Weblate version to another. If you want to turn it off, set the regular expression to `^$` (which won't match anything).

---

---

**Note :** As for now, there is no way to bulk-add already existing users to some group via the user interface. For that, you may resort to using the *REST API*.

---

## Groupes et rôles par défaut

After installation, a default set of groups is created (see *Liste de groupes*).

These roles and groups are created upon installation. The built-in roles are always kept up to date by the database migration when upgrading. You can't actually change them, please define a new role if you want to define your own set of permissions.

## List of privileges and built-in roles

Portée	Droits	Rôles
Facturation (voir <i>Facturation</i> )	Consulter la facturation	<i>Administration, Billing</i>
Modifications	Télécharger les modifications	<i>Administration</i>
Commentaires	Publier un commentaire	<i>Administration, Edit source, Power user</i>
	Supprimer le commentaire	<i>Administration</i>
Composant	Modifier les paramètres du composant	<i>Administration</i>
	Composant verrouillé, traductions impossibles	<i>Administration</i>
Glossaire	Ajouter une entrée de glossaire	<i>Administration, Manage glossary, Power user</i>
	Modifier une entrée de glossaire	<i>Administration, Manage glossary, Power user</i>
	Supprimer une entrée de glossaire	<i>Administration, Manage glossary, Power user</i>
	Téléverser des entrées de glossaires	<i>Administration, Manage glossary, Power user</i>
Suggestions automatiques	Utiliser les suggestions automatiques	<i>Administration, Edit source, Power user</i>
Mémoire de traduction	Modifier le mémoire de traduction	<i>Administration, Manage translation memory, Power user</i>
	Supprimer le mémoire de traduction	<i>Administration, Manage translation memory, Power user</i>
Projets	Modifier les paramètres du projet	<i>Administration</i>
	Gérer l'accès au projet	<i>Administration</i>
Rapports	Télécharger des rapports	<i>Administration</i>
Captures d'écran	Ajouter une capture d'écran	<i>Administration, Manage screenshots, Power user</i>
	Modifier la capture d'écran	<i>Administration, Manage screenshots, Power user</i>
	Supprimer la capture d'écran	<i>Administration, Manage screenshots, Power user</i>
Chaînes sources	Modifier des informations de chaîne supplémentaire	<i>Administration, Edit source</i>
Chaînes	Ajouter une nouvelle chaîne	<i>Administration</i>
	Supprimer une chaîne	<i>Administration</i>
	Ignorer les vérifications en échec	<i>Administration, Edit source, Power user</i>
	Modifier les chaînes	<i>Administration, Edit source, Power user</i>
	Réviser les chaînes	<i>Administration, Review strings</i>
	Modifier une chaîne lorsque les suggestions sont appliquées	<i>Administration, Review strings</i>
	Modifier les chaînes sources	<i>Administration, Edit source, Power user</i>
Suggestions	Accepter une suggestion	<i>Administration, Edit source, Power user</i>
	Ajouter une suggestion	<i>Administration, Edit source, Add strings</i>
	Supprimer une suggestion	<i>Administration, Power user</i>
	Voter pour une suggestion	<i>Administration, Edit source, Power user</i>
Traductions	Ajouter une langue à traduire	<i>Administration, Power user, Manage languages</i>
	Réaliser une traduction automatique	<i>Administration, Automatic translation</i>
	Supprimer une traduction existante	<i>Administration, Manage languages</i>
	Télécharger le fichier de traduction	<i>Administration, Edit source, Access repository</i>
	Ajouter plusieurs langues à traduire	<i>Administration, Manage languages</i>
Téléversements	Définir l'auteur de la traduction téléversée	<i>Administration</i>
	Remplacer les traductions existantes par un téléversement	<i>Administration, Edit source, Power user</i>
	Téléverser les traductions	<i>Administration, Edit source, Power user</i>
Système de contrôle de versions	Accéder au dépôt interne	<i>Administration, Access repository, Power user</i>
	Archiver les modifications dans le dépôt interne	<i>Administration, Manage repository</i>
	Pousser les modifications depuis le dépôt local	<i>Administration, Manage repository</i>
	Réinitialiser les modifications dans le dépôt interne	<i>Administration, Manage repository</i>
	Voir l'emplacement du dépôt en amont	<i>Administration, Access repository, Power user</i>
	Mettre à jour le dépôt interne	<i>Administration, Manage repository</i>
Privilèges pour l'ensemble du site	Utiliser l'interface de gestion	
	Créer de nouveaux projets	
	Ajouter des définitions de langue	
	Gérer les définitions de langue	
	Gérer les groupes	
	Gérer les utilisateurs	
	Gérer les rôles	
	Gérer les annonces	

Tableau 4 – suite de la page précédente

Portée	Droits	Rôles
	Gérer le mémoire de traduction	
	Gérer la liste des composants	

**Note :** Les privilèges du site ne sont accordés à aucun rôle par défaut. Ils sont puissants et assez proches du statut de super-utilisateur. La plupart d'entre eux affectent tous les projets de votre installation Weblate.

## Liste de groupes

Les groupes suivants sont créés lors de l'installation (ou après l'exécution `setupgroups`) et vous êtes libre de les modifier. La migration les recréera toutefois si vous les supprimez ou les renommez.

**Invités** Définit les droits pour les utilisateurs non authentifiés.

Ce groupe ne contient que des utilisateurs anonymes (voir `ANONYMOUS_USER_NAME`).

Vous pouvez supprimer des rôles de ce groupe pour limiter les droits pour les utilisateurs non authentifiés.

Rôles par défaut : *Ajouter une suggestion, Accès au dépôt*

**Lecteurs** Ce rôle assure la visibilité des projets publics pour tous les utilisateurs. Par défaut, tous les utilisateurs sont membres de ce groupe.

By default, `automatic group assignment` makes all new accounts members of this group when they join.

Rôles par défaut : aucun

**Utilisateurs** Groupe par défaut pour tous les utilisateurs.

By default, `automatic group assignment` makes all new accounts members of this group when they join.

Rôles par défaut : *Utilisateur expérimenté*

**Réviseur** Groupe pour les réviseurs (voir *Flux de travail de traduction*).

Rôles par défaut : *Réviser les chaînes*

**Gestionnaires** Groupe pour les administrateurs.

Rôles par défaut : *Administration*

**Avertissement :** Ne supprimez jamais les groupes et utilisateurs prédéfinis par Weblate car cela peut causer des problèmes inattendus. Si vous ne souhaitez pas utiliser ces éléments prédéfinis, il est préférable de retirer leurs droits.

## 2.6.3 Restrictions d'accès supplémentaires

If you want to use your Weblate installation in a less public manner, i.e. allow new users on an invitational basis only, it can be done by configuring Weblate in such a way that only known users have an access to it. In order to do so, you can set `REGISTRATION_OPEN` to `False` to prevent registrations of any new users, and set `REQUIRE_LOGIN` to `/.*` to require logging-in to access all the site pages. This is basically the way to lock your Weblate installation.

**Indication :** You can use built-in *invitations* to add new users.

## 2.7 Projets de traduction

### 2.7.1 Organisation de traduction

Weblate organizes translatable VCS content of project/components into a tree-like structure.

- The bottom level object is *Configuration du projet*, which should hold all translations belonging together (for example translation of an application in several versions and/or accompanying documentation).
- On the level above, *Configuration des composants*, which is actually the component to translate, you define the VCS repository to use, and the mask of files to translate.
- Above *Configuration des composants* there are individual translations, handled automatically by Weblate as translation files (which match *Masque de fichier* defined in *Configuration des composants*) appear in the VCS repository.

Weblate supports a wide range of translation formats (both bilingual and monolingual ones) supported by Translate Toolkit, see *Formats de fichiers pris en charge*.

**Note :** You can share cloned VCS repositories using *Weblate internal URLs*. Using this feature is highly recommended when you have many components sharing the same VCS. It improves performance and decreases required disk space.

### 2.7.2 Adding translation projects and components

Modifié dans la version 3.2 : An interface for adding projects and components is included, and you no longer have to use *L'interface d'administration Django*.

Modifié dans la version 3.4 : The process of adding components is now multi staged, with automated discovery of most parameters.

Based on your permissions, new translation projects and components can be created. It is always permitted for users with the *Add new projects* permission, and if your instance uses billing (e.g. like <https://hosted.weblate.org/> see *Facturation*), you can also create those based on your plans allowance from the user account that manages billing.


You can view your current billing plan on a separate page :

The screenshot shows the Weblate web interface. At the top is a navigation bar with 'Weblate', 'Dashboard', 'Projects', 'Languages', and 'Checks'. Below this is a breadcrumb 'Your profile / Billing'. The main content area is divided into two columns. The left column, titled 'Billing plan', shows the 'Current plan' as 'Basic plan (Active)', 'Monthly price' as '19 EUR', and 'Yearly price' as '199 EUR'. It also displays usage progress for 'Strings limit' and 'Languages limit', both at 'Used 0'. The 'Last invoice' is dated '2022-02-24 - 2022-02-26'. The 'Projects limit' is 'Used 0 of 1'. At the bottom of this column is a red button 'Terminate billing plan'. The right column, titled 'Invoices', shows a table with one row: 'Invoice period' '02/24/2022 - 02/26/2022', 'Invoice amount' '19.0 EUR', and 'Download invoice' 'Not available'. At the bottom of the 'Projects' section in the left column is a dark blue button 'Add new translation project'.

Billing plan	
Current plan	Basic plan (Active)
Monthly price	19 EUR
Yearly price	199 EUR
Strings limit	Used 0
Languages limit	Used 0
Last invoice	2022-02-24 - 2022-02-26
Projects limit	Used 0 of 1
Projects	No projects currently assigned!

Invoices		
Invoice period	Invoice amount	Download invoice
02/24/2022 - 02/26/2022	19.0 EUR	Not available

The project creation can be initiated from there, or using the menu in the navigation bar, filling in basic info about the translation project to complete addition of it :

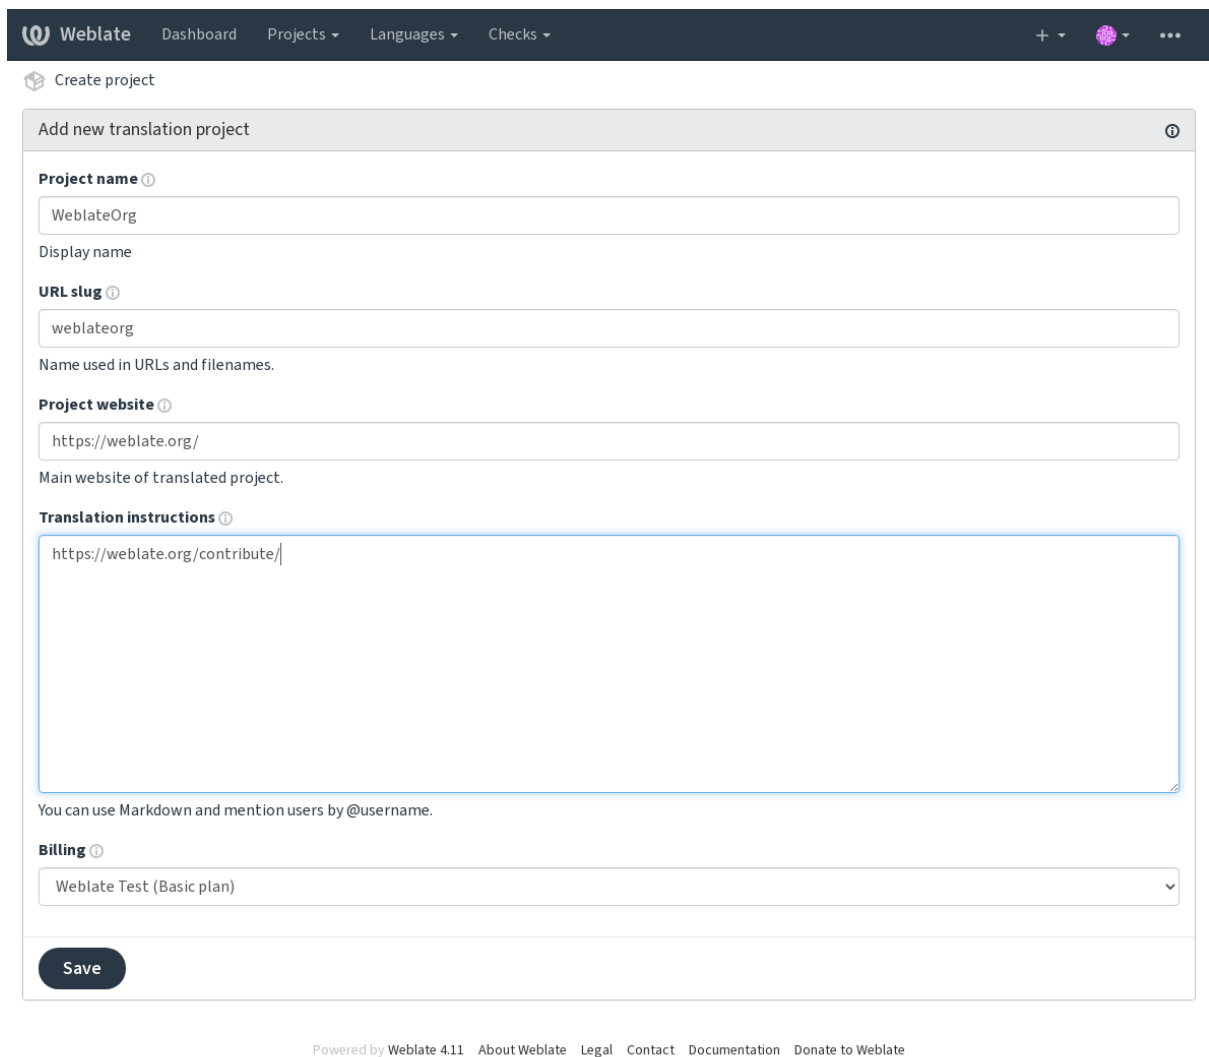

The screenshot shows the 'Add new translation project' form in the Weblate interface. The form is titled 'Add new translation project' and includes several input fields and a text area. The fields are: 'Project name' (containing 'WeblateOrg'), 'URL slug' (containing 'weblateorg'), 'Project website' (containing 'https://weblate.org/'), and 'Translation instructions' (containing 'https://weblate.org/contribute/'). There is also a 'Billing' dropdown menu set to 'Weblate Test (Basic plan)'. A 'Save' button is at the bottom. The footer of the page includes the text 'Powered by Weblate 4.11' and links to 'About Weblate', 'Legal', 'Contact', 'Documentation', and 'Donate to Weblate'.

Create project

Add new translation project

**Project name** ⓘ

WeblateOrg

Display name

**URL slug** ⓘ

weblateorg

Name used in URLs and filenames.

**Project website** ⓘ

https://weblate.org/

Main website of translated project.

**Translation instructions** ⓘ

https://weblate.org/contribute/

You can use Markdown and mention users by @username.


**Billing** ⓘ

Weblate Test (Basic plan)

Save

Powered by Weblate 4.11 About Weblate Legal Contact Documentation Donate to Weblate

After creating the project, you are taken directly to the project page :

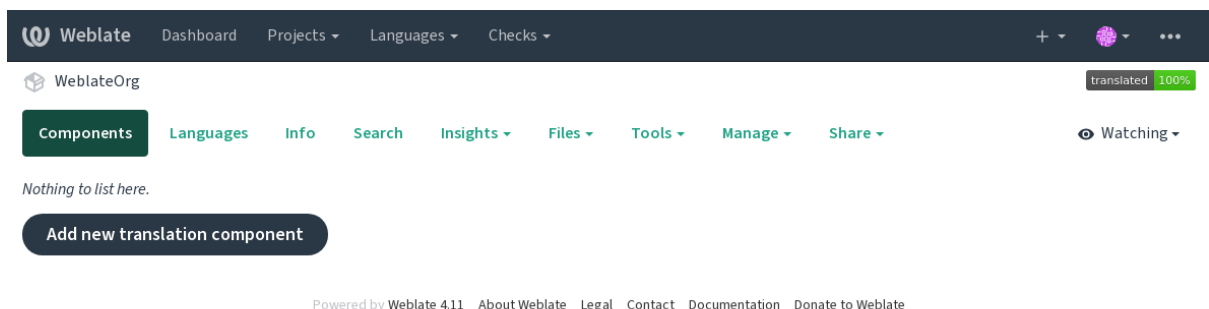

The screenshot shows the project page for 'WeblateOrg' in the Weblate interface. The page has a dark header with the Weblate logo and navigation links. Below the header, there is a section for 'WeblateOrg' with a 'translated 100%' badge. A 'Components' button is highlighted, and there are links for 'Languages', 'Info', 'Search', 'Insights', 'Files', 'Tools', 'Manage', and 'Share'. A 'Watching' button is also visible. A message 'Nothing to list here.' is displayed, and an 'Add new translation component' button is at the bottom. The footer of the page includes the text 'Powered by Weblate 4.11' and links to 'About Weblate', 'Legal', 'Contact', 'Documentation', and 'Donate to Weblate'.

Weblate

Dashboard Projects Languages Checks

WeblateOrg translated 100%

Components Languages Info Search Insights Files Tools Manage Share

Watching

Nothing to list here.

Add new translation component

Powered by Weblate 4.11 About Weblate Legal Contact Documentation Donate to Weblate

Creating a new translation component can be initiated via a single click there. The process of creating a component is multi-staged and automatically detects most translation parameters. There are several approaches to creating component :

**Depuis le contrôle de version** Creates component from remote version control repository.

**Depuis un composant existant** Creates additional component to existing one by choosing different files.

**Branche supplémentaire** Creates additional component to existing one, just for different branch.

**Téléverser les fichiers de traduction** Upload translation files to Weblate in case you do not have version control or do not want to integrate it with Weblate. You can later update the content using the web interface or [API REST de Weblate](#).

**Traduction du document** Upload single document or translation file and translate that.

**Démarrer de zéro** Create blank translation project and add strings manually.

Once you have existing translation components, you can also easily add new ones for additional files or branches using same repository.

First you need to fill in name and repository location :

Create component

From version control Upload translations files Translate document Start from scratch

Create a new translation component from remote version control system repository.

**Component name** ⓘ

Language names

Display name

**URL slug** ⓘ

language-names

Name used in URLs and filenames.

☐ Use as a glossary ⓘ

**Project** ⓘ

WeblateOrg

**Source language** ⓘ

English

Language used for source strings in all components

**Version control system** ⓘ

Git

Version control system to use to access your repository with translations.

**Source code repository** ⓘ

https://github.com/WeblateOrg/demo.git

URL of a repository, use weblate://project/component for sharing with other component.


**Repository branch** ⓘ

Repository branch to translate

Continue

Powered by Weblate 4.11 About Weblate Legal Contact Documentation Donate to Weblate

On the next page, you are presented with a list of discovered translatable resources :

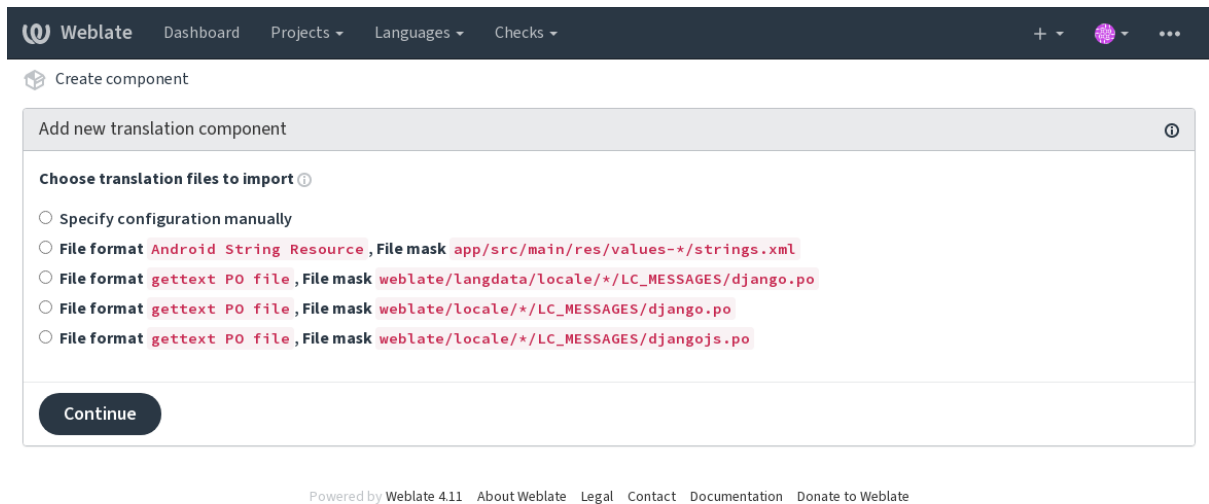

The screenshot shows the Weblate web interface. At the top is a dark navigation bar with the Weblate logo, 'Dashboard', 'Projects', 'Languages', and 'Checks' menus. Below this is a 'Create component' button. The main content area is a modal titled 'Add new translation component'. It contains a section 'Choose translation files to import' with four radio button options. The first option is 'Specify configuration manually'. The other three options are 'File format gettext PO file, File mask app/src/main/res/values-\*/strings.xml', 'File format gettext PO file, File mask weblate/langdata/locale/\*/LC\_MESSAGES/django.po', and 'File format gettext PO file, File mask weblate/locale/\*/LC\_MESSAGES/djangojs.po'. A 'Continue' button is at the bottom of the modal. At the very bottom of the page, there is a footer with the text 'Powered by Weblate 4.11' and links to 'About Weblate', 'Legal', 'Contact', 'Documentation', and 'Donate to Weblate'.

Webate Dashboard Projects Languages Checks

Create component

Add new translation component

Choose translation files to import

☐ Specify configuration manually

☐ File format `gettext PO file`, File mask `app/src/main/res/values-*/strings.xml`

☐ File format `gettext PO file`, File mask `weblate/langdata/locale/*/LC_MESSAGES/django.po`

☐ File format `gettext PO file`, File mask `weblate/locale/*/LC_MESSAGES/django.po`


☐ File format `gettext PO file`, File mask `weblate/locale/*/LC_MESSAGES/djangojs.po`

Continue

Powered by Weblate 4.11 About Weblate Legal Contact Documentation Donate to Weblate

As a last step, you review the translation component info and fill in optional details :




Dashboard
Projects
Languages
Checks

Create component

### Add new translation component

**Project**

WeblateOrg

**Component name**

Language names

Display name

**URL slug**

language-names

Name used in URLs and filenames.

**Version control system**

Git

Version control system to use to access your repository containing translations. You can also choose additional integration with third party providers to submit merge requests.

**Source code repository**

https://github.com/WeblateOrg/demo.git

URL of a repository, use weblate://project/component to share it with other component.

**Repository branch**

Repository branch to translate

**Repository push URL**

URL of a push repository, pushing is turned off if empty.

**Push branch**

Branch for pushing changes, leave empty to use repository branch

**Repository browser**

https://github.com/WeblateOrg/demo/blob/{{branch}}/{{filename}}#L{{line}}

Link to repository browser, use {{branch}} for branch, {{filename}} and {{line}} as filename and line placeholders. You might want to strip leading directory by using {{filename|parentdir}}.

**File format**

gettext PO file

**File mask**

app/src/main/res/values-\*/strings.xmlweblate/langdata/locale/\*/LC\_MESSAGES/django.po

Path of files to translate relative to repository root, use \* instead of language code, for example: po/\* or locale/\*/LC\_MESSAGES/django.po.

**Monolingual base language file**

app/src/main/res/values/strings.xml

Filename of translation base file, containing all strings and their source; it is recommended for monolingual translation formats.

☒ **Edit base file**

Whether users will be able to edit the base file for monolingual translations.

**Intermediate language file**

Filename of intermediate translation file. In most cases this is a translation file provided by developers and is used when creating actual source strings.

**Template for new translations**

weblate/langdata/locale/django.pot

Filename of file used for creating new translations. For gettext choose .pot file.

**Translation license**

GNU General Public License v3.0 or later

**Adding new translation**

Create new language file

How to handle requests for creating new translations.

**Language code style**

Default based on the file format

Customize language code used to generate the filename for translations created by Weblate.

**Language filter**

^(cs|he|hu)\$

Regular expression used to filter translation files when scanning for file mask.

**Source language**

English

Language used for source strings in all components

☐ **Use as a glossary**

You will be able to edit more options in the component settings after creating it.

**Save**

**Voir aussi :**

*L'interface d'administration Django, Configuration du projet, Configuration des composants*

## 2.7.3 Configuration du projet

Create a translation project and then add a new component for translation in it. The project is like a shelf, in which real translations are stacked. All components in the same project share suggestions and their dictionary; the translations are also automatically propagated through all components in a single project (unless turned off in the component configuration), see *Mémoire de traduction*.

**Voir aussi :**

/devel/integration

These basic attributes set up and inform translators of a project :

### Nom du projet

Verbose project name, used to display the project name.

### Abrégé de l'URL

Project name suitable for URLs.

### Site Web du projet

URL where translators can find more info about the project.

This is a required parameter unless turned off by *WEBSITE\_REQUIRED*.

### Directives de traduction

Text describing localization process in the project, and any other information useful for translators. Markdown can be used for text formatting or inserting links.

### Définir l'en-tête « Language-Team »

Whether Weblate should manage the Language-Team header (this is a *GNU gettext* only feature right now).

### Utiliser un mémoire de traduction partagé

Whether to use shared translation memory, see *Mémoire de traduction partagé* for more details.

Default value is determined by *DEFAULT\_SHARED\_TM*.

## Contribue au mémoire de traduction partagé

Whether to contribute to shared translation memory, see *Mémoire de traduction partagé* for more details.

Default value is determined by `DEFAULT_SHARED_TM`.

## Contrôle d'accès

Configure per project access control, see *Contrôle d'accès au projet* for more details.

Default value can be changed by `DEFAULT_ACCESS_CONTROL`.

## Activer les révisions

Enable review workflow for translations, see *Dedicated reviewers*.

## Activer la révision des chaînes sources

Enable review workflow for source strings, see *Source strings reviews*.

### Voir aussi :

report-source, *Commentaires*

## Activer les points d'ancrage

Whether unauthenticated *Déclencheurs de notification* are to be used for this repository.

### Voir aussi :

*Fichier de langue intermédiaire*, *Quality gateway for the source strings*, *Formats monolingues et bilingues*, *Définitions de langue*

## Alias de langue

Define language codes mapping when importing translations into Weblate. Use this when language codes are inconsistent in your repositories and you want to get a consistent view in Weblate or in case you want to use non-standard naming of your translation files.

The typical use case might be mapping American English to English : `en_US:en`

Multiple mappings to be separated by comma : `en_GB:en,en_US:en`

Using non standard code : `ia_FOO:ia`

---

**Indication :** The language codes are mapped when matching the translation files and the matches are case sensitive, so make sure you use the source language codes in same form as used in the filenames.

---

### Voir aussi :

*Parsing language codes*

## 2.7.4 Configuration des composants

A component is a grouping of something for translation. You enter a VCS repository location and file mask for which files you want translated, and Weblate automatically fetches from this VCS, and finds all matching translatable files.

**Voir aussi :**

/devel/integration

You can find some examples of typical configurations in the *Formats de fichiers pris en charge*.

---

**Note :** It is recommended to keep translation components to a reasonable size - split the translation by anything that makes sense in your case (individual apps or add-ons, book chapters or websites).

Weblate easily handles translations with 10000s of strings, but it is harder to split work and coordinate among translators with such large translation components.

---

Should the language definition for a translation be missing, an empty definition is created and named as « cs\_CZ (generated) ». You should adjust the definition and report this back to the Weblate authors, so that the missing languages can be included in next release.

The component contains all important parameters for working with the VCS, and for getting translations out of it :

### Nom du composant

Verbose component name, used to display the component name.

### Identifiant du composant

Component name suitable for URLs.

### Projet du composant

*Configuration du projet* where the component belongs.

### Système de contrôle de version

VCS to use, see *Intégration avec le système de contrôle de versions* for details.

**Voir aussi :**

*Pushing changes from Weblate*

### Dépôt du code source

VCS repository used to pull changes.

**Voir aussi :**

See *Accessing repositories* for more details on specifying URLs.

---

**Indication :** This can either be a real VCS URL or `weblate://project/component` indicating that the repository should be shared with another component. See *Weblate internal URLs* for more details.

---

## URL pour l'envoi du dépôt

Repository URL used for pushing. This setting is used only for *Git* and *Mercurial* and push support is turned off for these when this is empty.

For linked repositories, this is not used and setting from linked component applies.

### Voir aussi :

See *Accessing repositories* for more details on how to specify a repository URL and *Pushing changes from Weblate* for more details on pushing changes from Weblate.

## Explorateur de dépôt

URL of repository browser used to display source files (location of used messages). When empty, no such links will be generated. You can use *Balisage de modèle*.

For example on GitHub, use something like : `https://github.com/WeblateOrg/hello/blob/{{branch}}/{{filename}}#L{{line}}`

In case your paths are relative to different folder (path contains `..`), you might want to strip leading directory by `parentdir` filter (see *Balisage de modèle*) : `https://github.com/WeblateOrg/hello/blob/{{branch}}/{{filename|parentdir}}#L{{line}}`

## URL de dépôt exportée

URL where changes made by Weblate are exported. This is important when *Traduction en continu* is not used, or when there is a need to manually merge changes. You can use *Exportateur Git* to automate this for Git repositories.

## Branche du dépôt

Which branch to checkout from the VCS, and where to look for translations.

For linked repositories, this is not used and setting from linked component applies.

## Pousser la branche

Branch for pushing changes, leave empty to use *Branche du dépôt*.

For linked repositories, this is not used and setting from linked component applies.

---

**Note :** This is currently only supported for Git, GitLab and GitHub, it is ignored for other VCS integrations.

---

### Voir aussi :

*Pushing changes from Weblate*

### Masque de fichier

Mask of files to translate, including path. It should include one « \* » replacing language code (see *Définitions de langue* for info on how this is processed). In case your repository contains more than one translation file (e.g. more gettext domains), you need to create a component for each of them.

For example `po/* .po` or `locale/*/LC_MESSAGES/django.po`.

In case your filename contains special characters such as `[ , ]`, these need to be escaped as `[ [ ]` or `[ ] ]`.

#### Voir aussi :

*Formats monolingues et bilingues, What does mean « There are more files for the single language (en) » ?*

### Fichier de langue de base mono-langue

Base file containing string definitions for *Composants monolingues*.

#### Voir aussi :

*Formats monolingues et bilingues, What does mean « There are more files for the single language (en) » ?*

### Modifier le fichier de base

Whether to allow editing the base file for *Composants monolingues*.

### Fichier de langue intermédiaire

Intermediate language file for *Composants monolingues*. In most cases this is a translation file provided by developers and is used when creating actual source strings.

When set, the source strings are based on this file, but all other languages are based on *Fichier de langue de base mono-langue*. In case the string is not translated into the source language, translating to other languages is prohibited. This provides *Quality gateway for the source strings*.

#### Voir aussi :

*Quality gateway for the source strings, Formats monolingues et bilingues, What does mean « There are more files for the single language (en) » ?*

### Modèle pour les nouvelles traductions

Base file used to generate new translations, e.g. `.pot` file with gettext.

---

**Indication :** In many monolingual formats Weblate starts with empty file by default. Use this in case you want to have all strings present with empty value when creating new translation.

---

#### Voir aussi :

adding-translation, *Adding new translations, Ajouter une nouvelle traduction, Formats monolingues et bilingues, What does mean « There are more files for the single language (en) » ?*

## Format de fichier

Translation file format, see also *Formats de fichiers pris en charge*.

## Adresse pour signaler une anomalie de chaîne source

Email address used for reporting upstream bugs. This address will also receive notification about any source string comments made in Weblate.

## Permettre la propagation de la traduction

You can turn off propagation of translations to this component from other components within same project. This really depends on what you are translating, sometimes it's desirable to have make use of a translation more than once.

It's usually a good idea to turn this off for monolingual translations, unless you are using the same IDs across the whole project.

Default value can be changed by `DEFAULT_TRANSLATION_PROPAGATION`.

### Voir aussi :

*Keeping translations same across components*

## Autoriser les suggestions

Whether translation suggestions are accepted for this component.

## Vote pour la suggestion

Turns on vote casting for suggestions, see *Vote pour la suggestion*.

## Accepter automatiquement les suggestions

Automatically accept voted suggestions, see *Vote pour la suggestion*.

## Drapeaux de traduction

Customization of quality checks and other Weblate behavior, see *Customizing behavior using flags*.

## Vérifications forcées

List of checks which can not be ignored, see *Exécution des contrôles*.

---

**Note :** Enforcing the check does not automatically enable it, you still should enabled it using *Customizing behavior using flags* in *Drapeaux de traduction* or *Additional info on source strings*.

---

### Licence associée à cette traduction

License of the translation (does not need to be the same as the source code license).

### Accord de contribution

Accord que l'utilisateur doit approuver avant de pouvoir traduire ce composant.

### Ajouter une nouvelle traduction

How to handle requests for creation of new languages. Available options :

**Contacter les mainteneurs** User can select desired language and the project maintainers will receive a notification about this. It is up to them to add (or not) the language to the repository.

**Pointer vers l'URL des directives de traduction** User is presented a link to page which describes process of starting new translations. Use this in case more formal process is desired (for example forming a team of people before starting actual translation).

**Créer un fichier de nouvelle langue** User can select language and Weblate automatically creates the file for it and translation can begin.

**Désactiver l'ajout de nouvelles traductions** There will be no option for user to start new translation.

---

**Indication :** The project admins can add new translations even if it is disabled here when it is possible (either *Modèle pour les nouvelles traductions* or the file format supports starting from an empty file).

---

#### Voir aussi :

adding-translation, *Adding new translations*

### Gérer les chaînes

Nouveau dans la version 4.5.

Configures whether users in Weblate will be allowed to add new strings and remove existing ones. Adjust this to match your localization workflow - how the new strings are supposed to be introduced.

For bilingual formats, the strings are typically extracted from the source code (for example by using `xgettext`) and adding new strings in Weblate should be disabled (they would be discarded next time you update the translation files). In Weblate you can manage strings for every translation and it does not enforce the strings in all translations to be consistent.

For monolingual formats, the strings are managed only on source language and are automatically added or removed in the translations. The strings appear in the translation files once they are translated.

#### Voir aussi :

*Formats monolingues et bilingues*, adding-new-strings, `POST /api/translations/(string:project)/(string:component)/(string:language)/units/`



## Style de code-langue

Personnaliser le code de langue utilisé pour générer le nom de fichier des traductions créées par Weblate.

**Voir aussi :**

*Adding new translations, Code langue, Parsing language codes*

## Style de fusion

You can configure how updates from the upstream repository are handled. The actual implementation depends on VCS, see *Intégration avec le système de contrôle de versions*.

**Refonder** Rebases Weblate commits on top of upstream repository on update. This provides clean history without extra merge commits.

Rebasing can cause you trouble in case of complicated merges, so carefully consider whether or not you want to enable them.

You might need to enable force pushing by choosing *Git avec force push* as *Système de contrôle de version*, especially when pushing to a different branch.

**Fusionner** Upstream repository changed are merged into Weblate one. The merge utilizes fast-forward when possible. This is the safest way, but might produce a lot of merge commits.

**Fusionner sans « fast-forward »** Upstream repository changed are merged into Weblate one with doing a merge commit every time (even when fast-forward would be possible).

Default value can be changed by *DEFAULT\_MERGE\_STYLE*.

## Commit, add, delete, merge and add-on messages

Message used when committing a translation, see *Balisage de modèle*.

Default value can be changed by *DEFAULT\_ADD\_MESSAGE*, *DEFAULT\_ADDON\_MESSAGE*, *DEFAULT\_COMMIT\_MESSAGE*, *DEFAULT\_DELETE\_MESSAGE*, *DEFAULT\_MERGE\_MESSAGE*.

## Pousser lors de l'archivage

Whether committed changes should be automatically pushed to the upstream repository. When enabled, the push is initiated once Weblate commits changes to its underlying repository (see *Archivages lazy*). To actually enable pushing *Repository push URL* has to be configured as well.

## Âge des modifications à archiver

Sets how old (in hours) changes have to be before they are committed by background task or the *commit\_pending* management command. All changes in a component are committed once there is at least one change older than this period.

Default value can be changed by *COMMIT\_PENDING\_HOURS*.

---

**Indication :** There are other situations where pending changes might be committed, see *Archivages lazy*.

---

### Verrouiller en cas d'erreur

Locks the component (and linked components, see [Weblate internal URLs](#)) upon the first failed push or merge into its upstream repository, or pull from it. This avoids adding another conflicts, which would have to be resolved manually.

The component will be automatically unlocked once there are no repository errors left.

### Langue source

Language used for source strings. Change this if you are translating from something else than English.

---

**Indication :** In case you are translating bilingual files from English, but want to be able to do fixes in the English translation as well, choose *English (Developer)* as a source language to avoid conflict between the name of the source language and the existing translation.

For monolingual translations, you can use intermediate translation in this case, see [Fichier de langue intermédiaire](#).

---

### Filtre sur la langue

Regular expression used to filter the translation when scanning for file mask. It can be used to limit the list of languages managed by Weblate.

---

**Note :** You need to list language codes as they appear in the filename.

---

Some examples of filtering :

Description du filtre	Expression rationnelle
Selected languages only	<code>^(cs de es)\$</code>
Exclure des langues	<code>^(?! (it fr) \$) .+\$</code>
Filter two letter codes only	<code>^[.]+\$</code>
Exclude non language files	<code>^(?! (blank) \$) .+\$</code>
Include all files (default)	<code>^[^.] +\$</code>

### Expression rationnelle des variantes

Regular expression used to determine the variants of a string, see variants.

---

**Note :** Most of the fields can be edited by project owners or administrators, in the Weblate interface.

---

### Voir aussi :

[Does Weblate support other VCSes than Git and Mercurial ?](#), alerts

## Priorité

Les composants prioritaires sont proposés en premier à la traduction.

## Accès restreint

By default the component is visible to anybody who has access to the project, even if the person can not perform any changes in the component. This makes it easier to keep translation consistency within the project.

Restricting access at a component, or component-list level takes over access permission to a component, regardless of project-level permissions. You will have to grant access to it explicitly. This can be done through granting access to a new user group and putting users in it, or using the default *custom* or *private* access control groups.

The default value can be changed in `DEFAULT_RESTRICTED_COMPONENT`.

---

**Indication :** This applies to project admins as well — please make sure you will not loose access to the component after toggling the status.

---

## Partager dans les projets

You can choose additional projects where the component will be visible. Useful for shared libraries which you use in several projects.

---

**Note :** Sharing a component doesn't change its access control. It only makes it visible when browsing other projects. Users still need access to the actual component to browse or translate it.

---

## Utiliser comme glossaire

Nouveau dans la version 4.5.

Allows using this component as a glossary. You can configure how it will be listed using *Couleur du glossaire*.

The glossary will be accessible in all projects defined by *Partager dans les projets*.

It is recommended to enable *Gérer les chaînes* on glossaries in order to allow adding new words to them.

**Voir aussi :**

*Glossaire*

## Couleur du glossaire

Display color for a glossary used when showing word matches.

## 2.7.5 Balisage de modèle

Weblate uses simple markup language in several places where text rendering is needed. It is based on *Le langage de gabarit de Django*, so it can be quite powerful.

Currently it is used in :

- Commit message formatting, see *Configuration des composants*
- **Several add-ons**
  - *Découverte du composant*
  - *Générateur de statistiques*
  - *Executing scripts from add-on*

There following variables are available in the component templates :

```
{{ language_code }} Code langue
{{ language_name }} Nom de la langue
{{ component_name }} Nom du composant
{{ component_slug }} Identifiant du composant
{{ project_name }} Nom du projet
{{ project_slug }} Identifiant du projet
{{ url }} URL de traduction
{{ filename }} Nom du fichier de traduction
{{ stats }} Translation stats, this has further attributes, examples below.
{{ stats.all }} Total strings count
{{ stats.fuzzy }} Count of strings needing review
{{ stats.fuzzy_percent }} Percent of strings needing review
{{ stats.translated }} Nombre de chaînes traduites
{{ stats.translated_percent }} Pourcentage des chaînes traduites
{{ stats.allchecks }} Number of strings with failing checks
{{ stats.allchecks_percent }} Percent of strings with failing checks
{{ author }} Author of current commit, available only in the commit scope.
{{ addon_name }} Name of currently executed add-on, available only in the add-on commit message.
```

The following variables are available in the repository browser or editor templates :

```
{{branch}} branche actuelle
{{line}} line in file
{{filename}} filename, you can also strip leading parts using the parentdir filter, for example {{filename|parentdir}}
```

You can combine them with filters :

```
{{ component|title }}
```

You can use conditions :

```
{% if stats.translated_percent > 80 %}Well translated!{% endif %}
```

There is additional tag available for replacing characters :

```
{% replace component "-" " " %}
```

You can combine it with filters :

```
{% replace component|capfirst "-" " " %}
```

There are also additional filter to manipulate with filenames :

```
Directory of a file: {{ filename|dirname }}
File without extension: {{ filename|striptext }}
File in parent dir: {{ filename|parentdir }}
It can be used multiple times: {{ filename|parentdir|parentdir }}
```

...and other Django template features.

## 2.7.6 Vitesse d'importation

Fetching VCS repository and importing translations to Weblate can be a lengthy process, depending on size of your translations. Here are some tips :

### Optimiser la configuration

The default configuration is useful for testing and debugging Weblate, while for a production setup, you should do some adjustments. Many of them have quite a big impact on performance. Please check *Configuration de production* for more details, especially :

- Configure Celery for executing background tasks (see *Background tasks using Celery*)
- *Activer la mise en cache*
- *Use a powerful database engine*
- *Disable debug mode*

### Check resource limits

If you are importing huge translations or repositories, you might be hit by resource limitations of your server.

- Check the amount of free memory, having translation files cached by the operating system will greatly improve performance.
- Disk operations might be bottleneck if there is a lot of strings to process—the disk is pushed by both Weblate and the database.
- Additional CPU cores might help improve performance of background tasks (see *Background tasks using Celery*).

### Disable unneeded checks

Some quality checks can be quite expensive, and if not needed, can save you some time during import if omitted. See *CHECK\_LIST* for info on configuration.

## 2.7.7 Automatic creation of components

In case your project has dozen of translation files (e.g. for different gettext domains, or parts of Android apps), you might want to import them automatically. This can either be achieved from the command-line by using *import\_project* or *import\_json*, or by installing the *Découverte du composant* add-on.

To use the add-on, you first need to create a component for one translation file (choose the one that is the least likely to be renamed or removed in future), and install the add-on on this component.

For the management commands, you need to create a project which will contain all components and then run *import\_project* or *import\_json*.

### Voir aussi :

*Commandes de gestion, Découverte du composant*

## 2.8 Définitions de langue

To present different translations properly, info about language name, text direction, plural definitions and language code is needed.

### 2.8.1 Parsing language codes

While parsing translations, Weblate attempts to map language code (usually the ISO 639-1 one) from the *Masque de fichier* to any existing language object.

You can further adjust this mapping at project level by *Alias de langue*.

If no exact match can be found, an attempt will be made to best fit it into an existing language. Following steps are tried :

- Recherches insensibles à la casse.
- Normalisation des tirets bas et des tirets.
- Looking up built-in language aliases.
- Recherche par nom de langue.
- Ignoring the default country code for a given language—choosing `cs` instead of `cs_CZ`.

Should that also fail, a new language definition will be created using the defaults (left to right text direction, one plural). The automatically created language with code `xx_XX` will be named as `xx_XX (generated)`. You might want to change this in the admin interface later, (see *Changing language definitions*) and report it to the issue tracker (see *Contribuer à Weblate*), so that the proper definition can be added to the upcoming Weblate release.

---

**Indication :** In case you see something unwanted as a language, you might want to adjust *Filtre sur la langue* to ignore such file when parsing translations.

---

**Voir aussi :**

*Code langue, Adding new translations*

### 2.8.2 Changing language definitions

You can change language definitions in the languages interface (`/languages/` URL).

While editing, make sure all fields are correct (especially plurals and text direction), otherwise translators will be unable to properly edit those translations.

### 2.8.3 Définitions de langue intégrées

Definitions for about 600 languages are included in Weblate and the list is extended in every release. Whenever Weblate is upgraded (more specifically whenever **weblate migrate** is executed, see *Generic upgrade instructions*) the database of languages is updated to include all language definitions shipped in Weblate.

This feature can be disabled using `UPDATE_LANGUAGES`. You can also enforce updating the database to match Weblate built-in data using `setuplang`.

**Voir aussi :**

*Extending built-in language definitions*

## 2.8.4 Code langue ambigu et macrolangues

In many cases it is not a good idea to use macro language code for a translation. The typical problematic case might be Kurdish language, which might be written in Arabic or Latin script, depending on actual variant. To get correct behavior in Weblate, it is recommended to use individual language codes only and avoid macro languages.

**Voir aussi :**

[Macrolanguages definition](#), [List of macrolanguages](#)

## 2.8.5 Définitions de langue

Each language consists of following fields :

### Code langue

Code identifying the language. Weblate prefers two letter codes as defined by [ISO 639-1](#), but uses [ISO 639-2](#) or [ISO 639-3](#) codes for languages that do not have two letter code. It can also support extended codes as defined by [BCP 47](#).

**Voir aussi :**

[Parsing language codes](#), [Adding new translations](#)

### Nom de la langue

Visible name of the language. The language names included in Weblate are also being localized depending on user interface language.

### Orientation du texte

Determines whether language is written right to left or left to right. This property is autodetected correctly for most of the languages.

### Nombre pluriel

Number of plurals used in the language.

### Forme plurielle

Gettext compatible plural formula used to determine which plural form is used for given count.

**Voir aussi :**

[Pluriels](#), [GNU gettext utilities : Plural forms](#), [Language Plural Rules by the Unicode Consortium](#)

## 2.8.6 Adding new translations

Modifié dans la version 2.18 : In versions prior to 2.18 the behaviour of adding new translations was file format specific.

Weblate can automatically start new translation for all of the file formats.

Some formats expect to start with an empty file and only translated strings to be included (for example [Android string resources](#)), while others expect to have all keys present (for example [GNU gettext](#)). The document-based formats (for example [OpenDocument Format](#)) start with a copy of the source document and all strings marked as needing

editing. In some situations this really doesn't depend on the format, but rather on the framework you use to handle the translation (for example with *JSON files*).

When you specify *Modèle pour les nouvelles traductions* in *Configuration des composants*, Weblate will use this file to start new translations. Any exiting translations will be removed from the file when doing so.

When *Modèle pour les nouvelles traductions* is empty and the file format supports it, an empty file is created where new strings will be added once they are translated.

The *Style de code-langue* allows you to customize language code used in generated filenames :

**Par défaut, basé sur le format de fichier** Dependent on file format, for most of them POSIX is used.

**Style POSIX utilisant le tiret du dessous en tant que séparateur** Typically used by gettext and related tools, produces language codes like `pt_BR`.

**Style POSIX utilisant le tiret du bas comme séparateur et incluant le code pays** POSIX style language code including the country code even when not necessary (for example `cs_CZ`).

**Style BCP utilisant un trait d'union comme séparateur** Typically used on web platforms, produces language codes like `pt-BR`.

**Style BCP utilisant un trait d'union comme séparateur et incluant le code pays** BCP style language code including the country code even when not necessary (for example `cs-CZ`).

**Style Android** Only used in Android apps, produces language codes like `pt-rBR`.

**Style Java** Used by Java—mostly BCP with legacy codes for Chinese.

Additionally, any mappings defined in *Alias de langue* are applied in reverse.

---

**Note :** Weblate recognizes any of these when parsing translation files, the above settings only influences how new files are created.

---

**Voir aussi :**

*Code langue, Parsing language codes*

## 2.9 Traduction en continu

There is infrastructure in place so that your translation closely follows development. This way translators can work on translations the entire time, instead of working through huge amount of new text just prior to release.


**Voir aussi :**

*/devel/integration* describes basic ways to integrate your development with Weblate.

This is the process :

1. Developers make changes and push them to the VCS repository.
2. Optionally the translation files are updated (this depends on the file format, see *Why does Weblate still show old translation strings when I've updated the template ?*).
3. Weblate pulls changes from the VCS repository, see *Mise à jour des dépôts*.
4. Once Weblate detects changes in translations, translators are notified based on their subscription settings.
5. Translators submit translations using the Weblate web interface, or upload offline changes.
6. Once the translators are finished, Weblate commits the changes to the local repository (see *Archivages lazy*) and pushes them back if it has permissions to do so (see *Pushing changes from Weblate*).



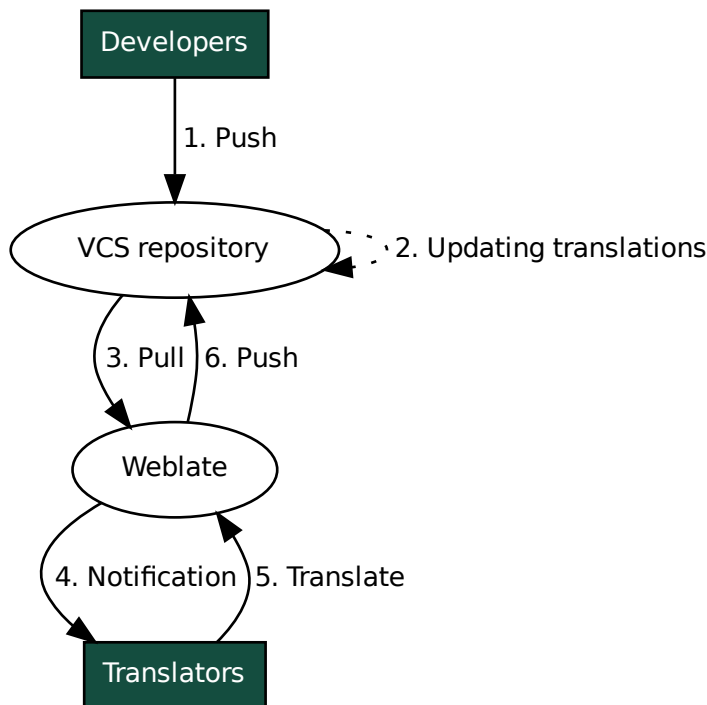

### 2.9.1 Mise à jour des dépôts

You should set up some way of updating backend repositories from their source.

- Use *Déclencheurs de notification* to integrate with most of common code hosting services :
  - *Automatically receiving changes from GitHub*
  - *Automatically receiving changes from GitLab*
  - *Automatically receiving changes from Bitbucket*
  - *Automatically receiving changes from Pagure*
  - *Automatically receiving changes from Azure Repos*
- Manually trigger update either in the repository management or using *API REST de Weblate* or *Client Weblate*
- Enable `AUTO_UPDATE` to automatically update all components on your Weblate instance
- Execute `updategit` (with selection of project or `--all` to update all)

Whenever Weblate updates the repository, the post-update addons will be triggered, see *Modules*.

### Avoiding merge conflicts

The merge conflicts from Weblate arise when same file was changed both in Weblate and outside it. There are two approaches to deal with that - avoid edits outside Weblate or integrate Weblate into your updating process, so that it flushes changes prior to updating the files outside Weblate.

The first approach is easy with monolingual files - you can add new strings within Weblate and leave whole editing of the files there. For bilingual files, there is usually some kind of message extraction process to generate translatable files from the source code. In some cases this can be split into two parts - one for the extraction generates template (for example gettext POT is generated using `xgettext`) and then further process merges it into actual translations (the gettext PO files are updated using `msgmerge`). You can perform the second step within Weblate and it will make sure that all pending changes are included prior to this operation.

The second approach can be achieved by using *API REST de Weblate* to force Weblate to push all pending changes and lock the translation while you are doing changes on your side.

The script for doing updates can look like this :

```
# Lock Weblate translation
wlc lock
# Push changes from Weblate to upstream repository
wlc push
# Pull changes from upstream repository to your local copy
git pull
# Update translation files, this example is for Django
./manage.py makemessages --keep-pot -a
git commit -m 'Locale updates' -- locale
# Push changes to upstream repository
git push
# Tell Weblate to pull changes (not needed if Weblate follows your repo
# automatically)
wlc pull
# Unlock translations
wlc unlock
```

If you have multiple components sharing same repository, you need to lock them all separately :

```
wlc lock foo/bar
wlc lock foo/baz
wlc lock foo/baj
```

---

**Note :** The example uses *Client Weblate*, which needs configuration (API keys) to be able to control Weblate remotely. You can also achieve this using any HTTP client instead of wlc, e.g. curl, see *API REST de Weblate*.

---

**Voir aussi :**

*Client Weblate*

### Automatically receiving changes from GitHub

Weblate comes with native support for GitHub.

If you are using Hosted Weblate, the recommended approach is to install the *Weblate app*, that way you will get the correct setup without having to set much up. It can also be used for pushing changes back.

To receive notifications on every push to a GitHub repository, add the Weblate Webhook in the repository settings (*Webhooks*) as shown on the image below :

The screenshot shows the GitHub interface for the repository 'WeblateOrg / hello'. The 'Settings' tab is selected, leading to the 'Webhooks' section. The 'Add webhook' form is displayed with the following fields and options:

- Options:** A sidebar menu on the left includes 'Options', 'Collaborators & teams', 'Branches', 'Webhooks' (selected), 'Integrations & services', 'Deploy keys', and 'Alerts'.
- Webhooks / Add webhook:** The main heading for the configuration page.
- Payload URL:** A text input field containing 'https://hosted.weblate.org/hooks/github/'.
- Content type:** A dropdown menu set to 'application/x-www-form-urlencoded'.
- Secret:** An empty text input field for a secret key.
- SSL verification:** A checkbox labeled 'By default, we verify SSL certificates when delivering payloads.' with a red 'Disable SSL verification' button.
- Which events would you like to trigger this webhook?:** Three radio button options:
  - ☒ Just the push event.
  - ☐ Send me everything.
  - ☐ Let me select individual events.
- Active:** A checked checkbox with the text 'We will deliver event details when this hook is triggered.'
- Add webhook:** A green button at the bottom of the form.

The footer of the page includes copyright information '© 2018 GitHub, Inc.', links for 'Terms', 'Privacy', 'Security', 'Status', and 'Help', the GitHub logo, and links for 'Contact GitHub', 'API', 'Training', 'Shop', 'Blog', and 'About'.

For the payload URL, append `/hooks/github/` to your Weblate URL, for example for the Hosted Weblate service, this is `https://hosted.weblate.org/hooks/github/`.


You can leave other values at default settings (Weblate can handle both content types and consumes just the *push* event).

**Voir aussi :**

*POST /hooks/github/, Accessing repositories from Hosted Weblate*

## Automatically receiving changes from Bitbucket

Weblate has support for Bitbucket webhooks, add a webhook which triggers upon repository push, with destination to `/hooks/bitbucket/` URL on your Weblate installation (for example `https://hosted.weblate.org/hooks/bitbucket/`).

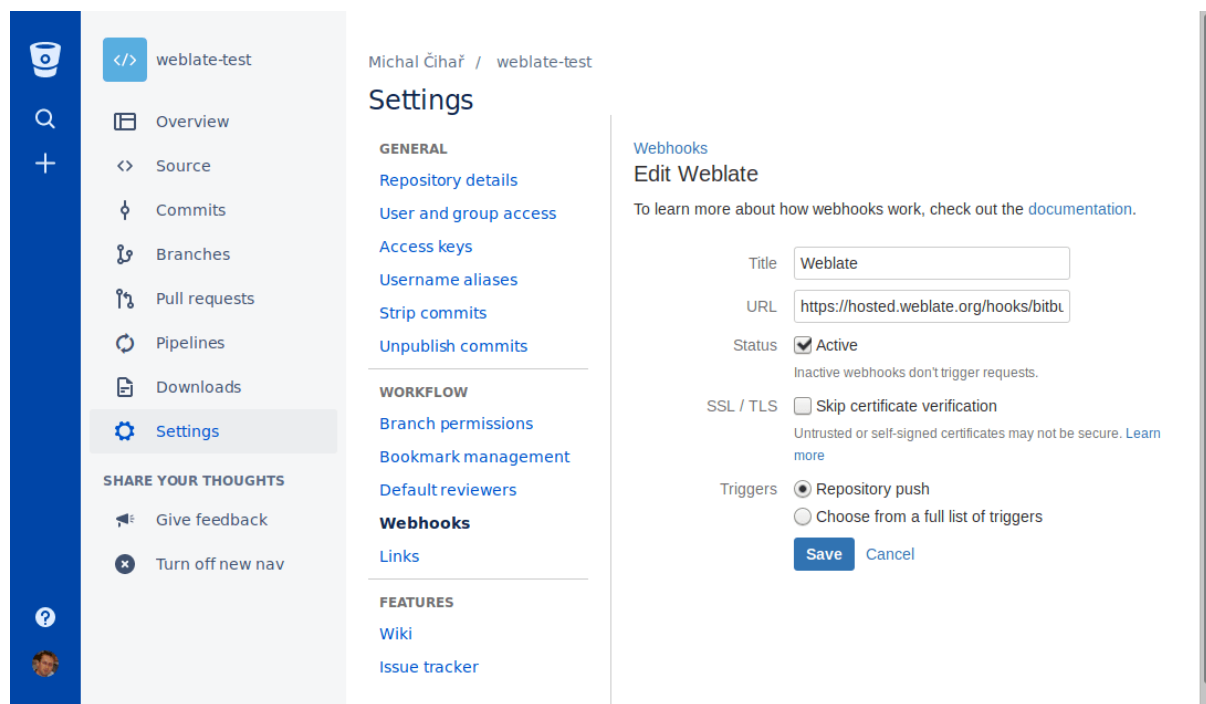

**Voir aussi :**

*POST /hooks/bitbucket/, Accessing repositories from Hosted Weblate*

## Automatically receiving changes from GitLab

Weblate has support for GitLab hooks, add a project webhook with destination to `/hooks/gitlab/` URL on your Weblate installation (for example `https://hosted.weblate.org/hooks/gitlab/`).

**Voir aussi :**

*POST /hooks/gitlab/, Accessing repositories from Hosted Weblate*

## Automatically receiving changes from Pagure

Nouveau dans la version 3.3.

Weblate has support for Pagure hooks, add a webhook with destination to `/hooks/pagure/` URL on your Weblate installation (for example `https://hosted.weblate.org/hooks/pagure/`). This can be done in *Activate Web-hooks* under *Project options* :

The screenshot shows the Weblate interface for a project named 'nijel-test'. The top navigation bar includes the 'fedora PAGURE' logo, a 'Browse' button, a 'Create' dropdown, and a user profile icon. Below this, a secondary bar shows 'New Issue', 'Open PR', 'Fork', and 'Clone' buttons. The main navigation menu on the left lists various settings categories: Project Settings, Project Details, Default Branch, Private Web Hook Key, API Keys, Project Options (selected), Public Notifications, Users & Groups, Deploy Keys, Hooks, Priorities, Roadmap, Close Status, Custom Issue Fields, Reports, Tags, Quick Replies, Regenerate Repos, Give Project, and Delete Project. The 'Project Options' section on the right contains a list of checkboxes for various features: 'Activate always merge', 'Activate disable non fast-forward merges', 'Activate Enforce signed-off commits in pull-request', 'Activate fedmsg notifications' (checked), 'Activate Issue tracker' (checked), 'Activate Issue tracker read only', 'Activate Issues default to private', 'Activate Minimum score to merge pull-request' (with a value of -1 in a text input), 'Activate notify on commit flag', 'Activate notify on pull-request flag', 'Activate Only assignee can merge pull-request', 'Activate open metadata access to all', 'Activate project documentation', 'Activate pull request access only', 'Activate pull requests' (checked), and 'Activate stomp notifications' (checked). Below these options is a text input for 'Activate Web-hooks' with the value 'https://hosted.weblate.org/hooks/pagure/'. There are 'Update' and 'Test web-hook' buttons. At the bottom, a 'Learn more about' section lists links for 'Flags', 'Tracker read-only', 'Pull-request access only', 'Roadmap on Issue page', and 'fedmsg notifications'.

**Voir aussi :**

*POST /hooks/pagure/, Accessing repositories from Hosted Weblate*

## Automatically receiving changes from Azure Repos

Nouveau dans la version 3.8.

Weblate has support for Azure Repos web hooks, add a webhook for *Code pushed* event with destination to `/hooks/azure/` URL on your Weblate installation (for example `https://hosted.weblate.org/hooks/azure/`). This can be done in *Service hooks* under *Project settings*.

**Voir aussi :**

Web hooks in Azure DevOps manual, *POST /hooks/azure/, Accessing repositories from Hosted Weblate*

## Automatically receiving changes from Gitea Repos

Nouveau dans la version 3.9.

Weblate has support for Gitea webhooks, add a *Gitea Webhook* for *Push events* event with destination to `/hooks/gitea/` URL on your Weblate installation (for example `https://hosted.weblate.org/hooks/gitea/`). This can be done in *Webhooks* under repository *Settings*.

**Voir aussi :**

Webhooks in Gitea manual, *POST /hooks/gitea/*, *Accessing repositories from Hosted Weblate*

## Automatically receiving changes from Gitee Repos

Nouveau dans la version 3.9.

Weblate has support for Gitee webhooks, add a *WebHook* for *Push* event with destination to `/hooks/gitee/` URL on your Weblate installation (for example `https://hosted.weblate.org/hooks/gitee/`). This can be done in *WebHooks* under repository *Management*.

**Voir aussi :**

Webhooks in Gitee manual, *POST /hooks/gitee/*, *Accessing repositories from Hosted Weblate*

## Automatically updating repositories nightly

Weblate automatically fetches remote repositories nightly to improve performance when merging changes later. You can optionally turn this into doing nightly merges as well, by enabling *AUTO\_UPDATE*.

## 2.9.2 Pushing changes from Weblate

Each translation component can have a push URL set up (see *URL pour l'envoi du dépôt*), and in that case Weblate will be able to push change to the remote repository. Weblate can be also be configured to automatically push changes on every commit (this is default, see *Pousser lors de l'archivage*). If you do not want changes to be pushed automatically, you can do that manually under *Repository maintenance* or using API via *wlc push*.

The push options differ based on the *Intégration avec le système de contrôle de versions* used, more details are found in that chapter.

In case you do not want direct pushes by Weblate, there is support for *GitHub pull requests*, *GitLab merge requests*, *Pagure merge requests* pull requests or *Gerrit* reviews, you can activate these by choosing *GitHub*, *GitLab*, *Gerrit* or *Pagure* as *Système de contrôle de version* in *Configuration des composants*.

Overall, following options are available with Git, GitHub and GitLab :

Configuration désirée	<i>Système de contrôle de version</i>	<i>URL pour l'envoi du dépôt</i>	<i>Pousser la branche</i>
Pas de push	<i>Git</i>	<i>vide</i>	<i>vide</i>
Pousser directement	<i>Git</i>	URL SSH	<i>vide</i>
Pousser dans une branche séparée	<i>Git</i>	URL SSH	Nom de la branche
GitHub pull request from fork	<i>GitHub pull requests</i>	<i>vide</i>	<i>vide</i>
GitHub pull request from branch	<i>GitHub pull requests</i>	SSH URL <sup>1</sup>	Nom de la branche
GitLab merge request from fork	<i>GitLab merge requests</i>	<i>vide</i>	<i>vide</i>
GitLab merge request from branch	<i>GitLab merge requests</i>	SSH URL <sup>page 67, 1</sup>	Nom de la branche
Pagure merge request from fork	<i>Pagure merge requests</i>	<i>vide</i>	<i>vide</i>
Pagure merge request from branch	<i>Pagure merge requests</i>	SSH URL <sup>page 67, 1</sup>	Nom de la branche

---

**Note :** You can also enable automatic pushing of changes after Weblate commits, this can be done in *Pousser lors de l'archivage*.

---

#### Voir aussi :

See *Accessing repositories* for setting up SSH keys, and *Archivages lazy* for info about when Weblate decides to commit changes.

### Branches protégées

If you are using Weblate on protected branch, you can configure it to use pull requests and perform actual review on the translations (what might be problematic for languages you do not know). An alternative approach is to waive this limitation for the Weblate push user.

For example on GitHub this can be done in the repository configuration :

- 
1. Can be empty in case *Dépôt du code source* supports pushing.

☒ **Require pull request reviews before merging**

When enabled, all commits must be made to a non-protected branch and submitted via a pull request with the required number of approving reviews and no changes requested before it can be merged into a branch that matches this rule.

Required approving reviews: 1 ▾

☐ **Dismiss stale pull request approvals when new commits are pushed**

New reviewable commits pushed to a matching branch will dismiss pull request review approvals.

☐ **Require review from Code Owners**

Require an approved review in pull requests including files with a designated code owner.

☒ **Restrict who can dismiss pull request reviews**

Specify people or teams allowed to dismiss pull request reviews.

🔍 Search for people or teams

**People and teams that can dismiss reviews.**



**Organization and repository administrators**

These members can always dismiss.



weblate  
Weblate push user



---

### 2.9.3 Interacting with others

Weblate makes it easy to interact with others using its API.

**Voir aussi :**

*API REST de Weblate*

### 2.9.4 Archivages lazy

The behaviour of Weblate is to group commits from the same author into one commit if possible. This greatly reduces the number of commits, however you might need to explicitly tell it to do the commits in case you want to get the VCS repository in sync, e.g. for merge (this is by default allowed for the *Managers* group, see *List of privileges and built-in roles*).

The changes in this mode are committed once any of the following conditions are fulfilled :

- Somebody else changes an already changed string.
- A merge from upstream occurs.
- An explicit commit is requested.
- Change is older than period defined as *Âge des modifications à archiver* on *Configuration des composants*.

---

**Indication :** Commits are created for every component. So in case you have many components you will still see lot of commits. You might utilize *Écrasement des archivages Git* add-on in that case.

---

If you want to commit changes more frequently and without checking of age, you can schedule a regular task to perform a commit :



```
CELERY_BEAT_SCHEDULE = {
    # Unconditionally commit all changes every 2 minutes
    "commit": {
        "task": "weblate.trans.tasks.commit_pending",
        # Ommiting hours will honor per component settings,
        # otherwise components with no changes older than this
        # won't be committed
        "kwargs": {"hours": 0},
        # How frequently to execute the job in seconds
        "schedule": 120,
    }
}
```

## 2.9.5 Processing repository with scripts

The way to customize how Weblate interacts with the repository is *Modules*. Consult *Executing scripts from add-on* for info on how to execute external scripts through add-ons.

## 2.9.6 Keeping translations same across components

Once you have multiple translation components, you might want to ensure that the same strings have same translation. This can be achieved at several levels.

### Propagation des traductions

With *Permettre la propagation de la traduction* enabled (what is the default, see *Configuration des composants*), all new translations are automatically done in all components with matching strings. Such translations are properly credited to currently translating user in all components.

---

**Note :** The translation propagation requires the key to be match for monolingual translation formats, so keep that in mind when creating translation keys.

---

### Contrôle de cohérence

The *Incohérence* check fires whenever the strings are different. You can utilize this to review such differences manually and choose the right translation.

### Traduction automatique

Automatic translation based on different components can be way to synchronize the translations across components. You can either trigger it manually (see *Traduction automatique*) or make it run automatically on repository update using add-on (see *Traduction automatique*).

## 2.10 Licence des traductions

You can specify which license translations are contributed under. This is especially important to do if translations are open to the public, to stipulate what they can be used for.

You should specify *Configuration des composants* license info. You should avoid requiring a contributor license agreement, though it is possible.

### 2.10.1 Informations sur la licence

Upon specifying license info (license name and URL), this info is shown in the translation info section of the respective *Configuration des composants*.

Usually this is best place to post licensing info if no explicit consent is required. If your project or translation is not libre you most probably need prior consent.

### 2.10.2 Accord de contribution

If you specify a contributor license agreement, only users who have agreed to it will be able to contribute. This is a clearly visible step when accessing the translation :

Contribution to this translation requires you to agree with a contributor agreement. [View contributor agreement](#)

Language	Translated	Unfinished	Unfinished words	Checks	Suggestions	Comments
Czech 🇨🇪 GPL-3.0	✓					
Hebrew 🇮🇱 GPL-3.0	✓					
Hungarian 🇭🇺 GPL-3.0	81%	4	5			
English 🇬🇧 GPL-3.0	✓					

[Start new translation](#)

Powered by Weblate 4.11 [About Weblate](#) [Legal](#) [Contact](#) [Documentation](#) [Donate to Weblate](#)

The entered text is formatted into paragraphs and external links can be included. HTML markup can not be used.

## 2.10.3 Licences utilisateur

Any user can review all translation licenses of all public projects on the instance from their profile :

**Licenses**

Please pay attention to the licensing info, as this specifies how translations can be used.

By registering you agree to use your name and e-mail in the commits, and provide your contribution under the license defined by each localization project.

You have agreed to the following as a contributor:

- [WeblateOrg/Language names](#)

**Licenses for individual translations**

GNU General Public License v3.0 or later GPL-3.0 ⓘ

[WeblateOrg/Djangojs](#) [WeblateOrg/Django](#) [WeblateOrg/WebblateOrg](#) [WeblateOrg/Language names](#)

MIT License MIT ⓘ

[WeblateOrg/Android](#)

Powered by Weblate 4.11 [About Weblate](#) [Legal](#) [Contact](#) [Documentation](#) [Donate to Weblate](#)

## 2.11 Processus de traduction

### 2.11.1 Vote pour la suggestion

Everyone can add suggestions by default, to be accepted by signed in users. Suggestion voting can be used to make use of a string when more than one signed-in user agrees, by setting up the *Configuration des composants* with *Suggestion voting* to turn on voting, and *Autoaccept suggestions* to set a threshold for accepted suggestions (this includes a vote from the user making the suggestion if it is cast).

---

**Note :** Once automatic acceptance is set up, normal users lose the privilege to directly save translations or accept suggestions. This can be overridden with the *Edit string when suggestions are enforced permission*.


---

You can combine these with *access control* into one of the following setups :

- Users suggest and vote for suggestions and a limited group controls what is accepted. - Turn on voting. - Turn off automatic acceptance. - Don't let users save translations.
- Users suggest and vote for suggestions with automatic acceptance once the defined number of them agree. - Turn on voting. - Set the desired number of votes for automatic acceptance.
- Optional voting for suggestions. (Can optionally be used by users when they are unsure about a translation by making multiple suggestions.) - Only turn on voting.

## 2.11.2 Additional info on source strings

Enhance the translation process by adding additional info to the strings including explanations, string priorities, check flags and visual context. Some of that info may be extracted from the translation files and some may be added by editing the additional string info :

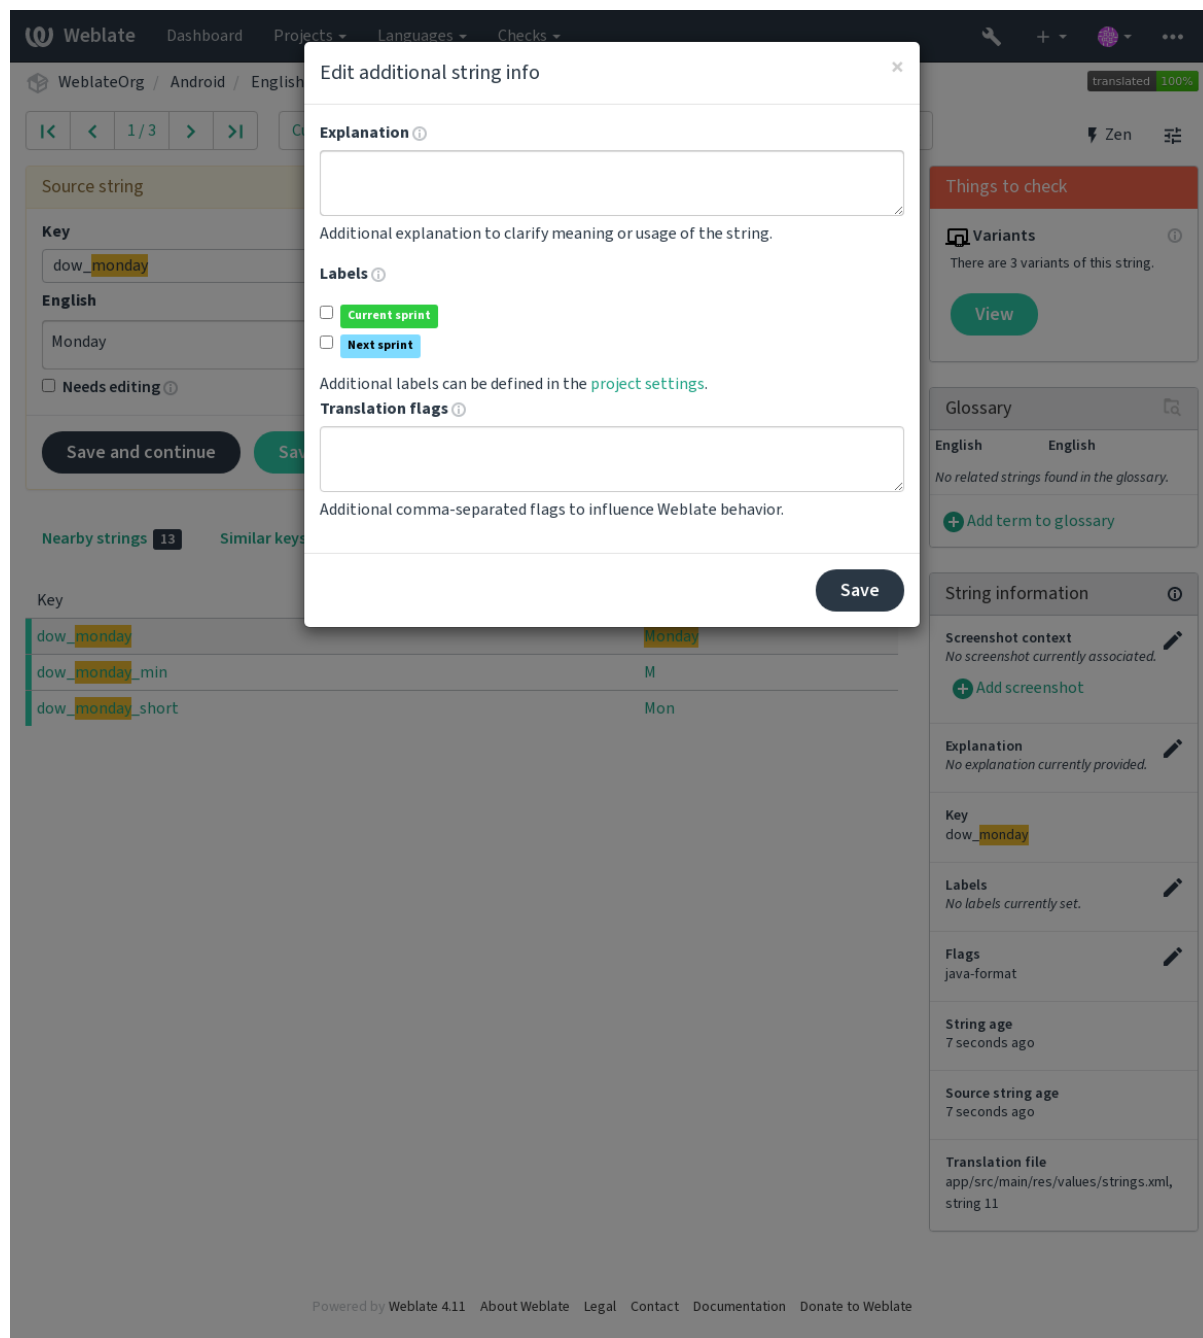

Access this directly from the translation interface by clicking the « Edit » icon next to *Screenshot context* or *Flags*.

WeblateOrg / Django / Czech / Translate

translated 96%

< > 11 / 26 > >

All strings ▾

Position and priority ▾ 1

Zen

Translation

Explanation

Help text for automatic translation tool

English

Automatic translation via machine translation uses active machine translation engines to get the best possible translations and applies them in this project.

Czech

Automatický překlad prostřednictvím strojového překladu používá aktivní enginy strojového překladu pro získání nejlepších možných překladů a použije je na tento projekt.

☐ Needs editing ⓘ

169/1570 · 157

Save and continue Save and stay Suggest Skip

Nearby strings 26 Comments Automatic suggestions Other languages 4 History

Context	English	Czech
	Files	Soubory
	Automatic translation	Automatický překlad
	Add new translation string	Add new translation string
	Translation status	Stav překladu
	%(count)s word	%(count)s slovo
	Other components	Další součásti
	Translation file	Soubor s překladem
	Download	Stáhnout
	Browse all translation changes	Procházet všechny změny v překladu.
	Automatic translation takes existing translations in this project and applies them to the current component. It can be used to push translations to a different branch, to fix inconsistent translations or to translate a new component using translation memory.	Automatický překlad použije stávající překlady v projektu na tuto součást. Může být užitečný pro sloučení překladů z jiné větve, opravu nekonzistentních překladů nebo překlad nové součásti pomocí překladové paměti.
	Automatic translation via machine translation uses active machine translation engines to get the best possible translations and applies them in this project.	Automatický překlad prostřednictvím strojového překladu používá aktivní enginy strojového překladu pro získání nejlepších možných překladů a použije je na tento projekt.
	You can add new translation string here, it will automatically appear in all translations.	Zde můžete přidat nový řetězec k překladu, automaticky se objeví ve všech jazycích.
	The uploaded file will be merged with the current translation. In case you want to overwrite already translated strings, don't forget to enable it.	Nahráný soubor bude sloučen se stávajícími překlady. Pokud chcete přepsat již přeložené řetězce, nepamenejte to povolit.
	The uploaded file will be merged with the current translation.	Nahráný soubor bude sloučen se stávajícími překlady.
	The fulltext search might not work properly as the fulltext index for this translation is not yet up to date.	Fulltextové vyhledávání nemusí fungovat správně, protože fulltextový index pro tento překlad ještě není plně zpracován.
	Review	Kontrola
	Review translations touched by other users.	Zkontrolovat překlady od ostatních uživatelů.
	Start review	Začít kontrolu
	Percent	Procenta
	Total	Celkem
	Failing check	Neúspěšných kontrol
	Last activity	Poslední aktivity
	Last change	Poslední změna
	Last author	Poslední autor
Question for a mathematics-based CAPTCHA, the %s is an arithmetic problem	What is %s?	Kolik to je?
	The string uses three dots (...) instead of an ellipsis character (...)	

Glossary

English Czech

machine strojový weblate.org

translation překlad

project projekt weblate.org

+ Add term to glossary

String information ⓘ

Screenshot context

No screenshot currently associated.

+ Add screenshot

Explanation

Help text for automatic translation tool

Labels

No labels currently set.

Flags

No flags currently set.

Source string location

weblate/templates/translation.html:212

String age

a second ago

Source string age

2 seconds ago

Translation file

weblate/locale/cs/LC\_MESSAGES/django.po, string 11

## Priorité de chaînes

Nouveau dans la version 2.0.

String priority can be changed to offer higher priority strings for translation earlier by using the `priority` flag.

---

**Indication :** This can be used to order the flow of translation in a logical manner.

---

**Voir aussi :**

*Quality checks*

## Drapeaux de traduction

Nouveau dans la version 2.4.

Modifié dans la version 3.3 : Previously called *Quality checks flags*, it no longer configures only checks.

Customization of quality checks and other Weblate behavior, see *Customizing behavior using flags*.

The string flags are also inherited from the *Drapeaux de traduction* at *Configuration des composants* and flags from the translation file (see *Formats de fichiers pris en charge*).

**Voir aussi :**

*Quality checks, Customizing behavior using flags*

## Explication

Modifié dans la version 4.1 : In previous versions this has been called *Extra context*.

Use the explanation to clarify scope or usage of the translation. You can use Markdown to include links and other markup.

## Visual context for strings

Nouveau dans la version 2.9.

You can upload a screenshot showing a given source string in use within your program. This helps translators understand where it is used, and how it should be translated.

The uploaded screenshot is shown in the translation context sidebar :

W Weblate

Dashboard

Projects ▾

Languages ▾

Checks ▾

🔧

+

🌐

⋮

🏠 WeblateOrg / Django / Czech / Translate

translated 96%

⏪

⏴

11 / 26

⏵

⏩

All strings ▾

Position and priority ▾

⚡ Zen

🔍

Translation

🔗

Explanation

Help text for automatic translation tool

English

Automatic translation via **machine translation** uses active **machine translation** engines to get the best possible translations and applies them in this **project**.

Czech

Automatický překlad prostřednictvím strojového překladu používá aktivní enginy strojového překladu pro získání nejlepších možných překladů a použije je na tento projekt.

☐ Needs editing ⓘ

169/1570 · 157

Save and continue

Save and stay

Suggest

Skip

Nearby strings 26

Comments

Automatic suggestions

Other languages 4

History

Translation memory

Search

Translation	Source	Origin	Similarity		
Automatický překlad prostřednictvím strojového překladu používá aktivní enginy strojového překladu pro získání nejlepších možných překladů a použije je na tento projekt.	Automatic translation via machine translation uses active machine translation engines to get the best possible translations and applies them in this project.	Weblate Translation Memory (Project: weblateorg/django) Weblate Translation Memory (Shared: weblateorg/django) Weblate (WeblateOrg/Django)	100 %	Copy	Copy and save

Glossary

🔍

English

Czech

machine translation

strojový překlad

WeblateOrg

🔍

project

projekt

WeblateOrg

🔍

+ Add term to glossary

String information ⓘ

Screenshot context

🔍

+ Add screenshot

Explanation

🔍

Help text for automatic translation tool

Labels

🔍

No labels currently set.

Flags

🔍

No flags currently set.

Source string location

weblate/templates/translation.html:212

String age

5 seconds ago

Source string age

5 seconds ago

Translation file

weblate/locale/cs/LC\_MESSAGES/django.po, string 11

Powered by Weblate 4.11 About Weblate Legal Contact Documentation Donate to Weblate

In addition to *Additional info on source strings*, screenshots have a separate management interface under the *Tools* menu. Upload screenshots, assign them to source strings manually, or use optical character recognition to do so. Once a screenshot is uploaded, this interface handles management and source string association :

2.11. Processus de traduction

267

Weblate

Dashboard

Projects ▾

Languages ▾

Checks ▾

+

▾

WeblateOrg

/

Django

/

Screenshots

/

Automatic translation

Screenshot has been uploaded, you can now assign it to source strings.

Assigned source strings

English	Location	Assigned screenshots	Actions
No matching strings found.			
Screenshot is shown to add visual context for all listed source strings.			

Assign source strings

English	Location	Assigned screenshots	Actions
No matching strings found.			

Source string search

Search

Automatically recognize

Image

Source string

Hello, world!↵

OneOrangutan has %d banana.↵

OtherOrangutan has %d bananas.↵

Try Weblate at <http://demo.weblate.org/>!↵

Thank you for using Weblate.

Screenshot is shown to add visual context for all listed source strings.

Edit screenshot

Screenshot name

Automatic translation

Image

Currently: screenshots/screenshot.png

Change:

Choose File

No file chosen

Upload JPEG or PNG images up to 2000x2000 pixels.

Save

Screenshot details

Created	now
Uploaded by	<div></div> testuser
Language	English

Delete screenshot

Deleting screenshot will remove it from all associated source strings.

Delete

Powered by Weblate 4.11 About Weblate Legal Contact Documentation Donate to Weblate

268

Chapitre 2. Documentation pour l'administrateur



## 2.12 Contrôles de qualité et corrections

### 2.12.1 Personnaliser les réparations automatiques

Vous pouvez aussi implémenter vos propres réparations automatiques en plus de celles standards et les inclure dans `AUTOFIX_LIST`.

Les réparations automatiques sont puissantes, mais peuvent aussi causer des dommages ; soyez prudent quand vous en écrivez.

Par exemple, la réparation automatique suivante remplacerait chaque occurrence de la chaîne `foo` dans une traduction par `bar` :

```
#
# Copyright © 2012-2022 Michal Čihař <michal@cihar.com>
#
# This file is part of Weblate <https://weblate.org/>
#
# This program is free software: you can redistribute it and/or modify
# it under the terms of the GNU General Public License as published by
# the Free Software Foundation, either version 3 of the License, or
# (at your option) any later version.
#
# This program is distributed in the hope that it will be useful,
# but WITHOUT ANY WARRANTY; without even the implied warranty of
# MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
# GNU General Public License for more details.
#
# You should have received a copy of the GNU General Public License
# along with this program. If not, see <https://www.gnu.org/licenses/>.
#

from django.utils.translation import gettext_lazy as _

from weblate.trans.autofixes.base import AutoFix

class ReplaceFooWithBar(AutoFix):
    """Replace foo with bar."""

    name = _("Foobar")

    def fix_single_target(self, target, source, unit):
        if "foo" in target:
            return target.replace("foo", "bar"), True
        return target, False
```

Pour installer des contrôles personnalisés, fournissez un chemin d'accès complet à la classe Python dans le fichier `AUTOFIX_LIST`, voir *Custom quality checks, add-ons and auto-fixes*.

## 2.12.2 Customizing behavior using flags

Vous pouvez affiner le comportement de Weblate (principalement les contrôles) pour chaque chaîne de caractères source (dans la revue des chaînes de caractères source, voir additionnal) ou dans le *Configuration des composants (Drapeaux de traduction)*. Certains formats de fichiers permettent également de spécifier des drapeaux directement dans le format (voir *Formats de fichiers pris en charge*).

Les drapeaux sont séparés par des virgules, les paramètres sont séparés par deux points. Vous pouvez utiliser des guillemets pour inclure des espaces ou des caractères spéciaux dans la chaîne de caractères. Par exemple :

```
placeholders:"special:value":"other value", regex:.*
```

Voici une liste des drapeaux actuellement acceptés :

- rst-text** Traiter le texte comme document reStructuredText, affecte *Traduction inchangée*.
- dos-eol** Utilise les marqueurs de fin de ligne DOS au lieu de ceux d'Unix (`\r\n` au lieu de `\n`).
- read-only** La chaîne est en lecture seule et ne devrait pas être modifiée dans Weblate, voir *Chaînes en lecture seule*.
- priority:N** Priorité de la chaîne. Les chaînes de priorité plus élevée sont présentées en premier lieu pour la traduction. La priorité par défaut est de 100, plus une chaîne est prioritaire, plus elle est proposée tôt pour la traduction.
- max-length:N** Limiter la longueur maximale d'une chaîne à N caractères, voir *Taille maximum de la traduction*.
- xml-text** Traiter le texte comme document XML, affecte *Syntaxe XML* et *Balises XML*.
- font-family:NAME** Définir la famille de polices pour les contrôles de rendu, voir *Gestion des polices*.
- font-weight:WEIGHT** Définir le poids des polices pour les contrôles de rendu, voir *Gestion des polices*.
- font-size:SIZE** Définir la taille des polices pour les contrôles de rendu, voir *Gestion des polices*.
- font-spacing:SPACING** Définir l'espacement des caractères pour les contrôles du rendu, voir *Gestion des polices*.
- icu-flags:FLAGS** Define flags for customizing the behavior of the *ICU MessageFormat* quality check.
- icu-tag-prefix:PREFIX** Set a required prefix for XML tags for the *ICU MessageFormat* quality check.
- placeholders:NAME:NAME2:...** Chaînes de caractères de remplacement attendues dans la traduction, voir *Balises de remplacement*.
- replacements:FROM:TO:FROM2:TO2...** Remplacements à effectuer lors de la vérification des paramètres du texte résultant (par exemple dans *Taille maximale de la traduction* ou *Taille maximum de la traduction*). Le cas d'utilisation typique est l'expansion des caractères à placer pour s'assurer que le texte s'adapte même aux grandes valeurs, par exemple : `replacements:%s : "John Doe"`.
- variants:SOURCE** Marquez cette chaîne en tant que variante de la chaîne avec la source correspondante. Voir variants.
- regex:REGEX** Expression rationnelle correspondant à la traduction, voir *Expression rationnelle*.
- forbidden** Indicates forbidden translation in a glossary, see *Forbidden translations*.
- strict-same** Faire en sorte que les « Traductions inchangées » évitent d'utiliser la liste noire de mots intégrés, voir *Traduction inchangée*.
- check-glossary** Enable the *Non conforme au glossaire* quality check.
- angularjs-format** Enable the *Chaîne d'interpolation AngularJS* quality check.
- c-format** Enable the *Format C* quality check.
- c-sharp-format** Enable the *Format C#* quality check.
- es-format** Enable the *Modèle de littéraux ECMAScript* quality check.
- i18next-interpolation** Enable the *Interpolation i18next* quality check.
- icu-message-format** Enable the *ICU MessageFormat* quality check.
- java-format** Enable the *Format Java* quality check.
- java-messageformat** Enable the *MessageFormat Java* quality check.

**javascript-format** Enable the *Format JavaScript* quality check.

**lua-format** Enable the *Format Lua* quality check.

**object-pascal-format** Enable the *Format Pascal objet* quality check.

**percent-placeholders** Enable the *Balises de remplacement par caractères pour cent* quality check.

**perl-format** Enable the *Format Perl* quality check.

**php-format** Enable the *Format PHP* quality check.

**python-brace-format** Enable the *Format d'accolade Python* quality check.

**python-format** Enable the *Format Python* quality check.

**qt-format** Enable the *Format Qt* quality check.

**qt-plural-format** Enable the *Forme plurielle Qt* quality check.

**ruby-format** Enable the *Format Ruby* quality check.

**scheme-format** Enable the *Format Scheme* quality check.

**vue-format** Enable the *Formatage Vue I18n* quality check.

**md-text** Treat text as a Markdown document. Enable *Liens Markdown*, *Références Markdown*, and *Syntaxe Markdown* quality checks.

**safe-html** Enable the *HTML non sûr* quality check.

**url** The string should consist of only a URL. Enable the *URL* quality check.

**ignore-bbcode** Skip the *Balilage BBCode* quality check.

**ignore-duplicate** Skip the *Répétition de mots* quality check.

**ignore-check-glossary** Skip the *Non conforme au glossaire* quality check.

**ignore-double-space** Skip the *Double espace* quality check.

**ignore-angularjs-format** Skip the *Chaîne d'interpolation AngularJS* quality check.

**ignore-c-format** Skip the *Format C* quality check.

**ignore-c-sharp-format** Skip the *Format C#* quality check.

**ignore-es-format** Skip the *Modèle de littéraux ECMAScript* quality check.

**ignore-i18next-interpolation** Skip the *Interpolation i18next* quality check.

**ignore-icu-message-format** Skip the *ICU MessageFormat* quality check.

**ignore-java-format** Skip the *Format Java* quality check.

**ignore-java-messageformat** Skip the *MessageFormat Java* quality check.

**ignore-javascript-format** Skip the *Format JavaScript* quality check.

**ignore-lua-format** Skip the *Format Lua* quality check.

**ignore-object-pascal-format** Skip the *Format Pascal objet* quality check.

**ignore-percent-placeholders** Skip the *Balises de remplacement par caractères pour cent* quality check.

**ignore-perl-format** Skip the *Format Perl* quality check.

**ignore-php-format** Skip the *Format PHP* quality check.

**ignore-python-brace-format** Skip the *Format d'accolade Python* quality check.

**ignore-python-format** Skip the *Format Python* quality check.

**ignore-qt-format** Skip the *Format Qt* quality check.

**ignore-qt-plural-format** Skip the *Forme plurielle Qt* quality check.

**ignore-ruby-format** Skip the *Format Ruby* quality check.

**ignore-scheme-format** Skip the *Format Scheme* quality check.

**ignore-vue-format** Skip the *Formatage Vue I18n* quality check.

**ignore-translated** Skip the *A déjà été traduit* quality check.

**ignore-inconsistent** Skip the *Incohérence* quality check.

**ignore-kashida** Skip the *Présence d'un caractère kashida* quality check.

**ignore-md-link** Skip the *Liens Markdown* quality check.  
**ignore-md-reflink** Skip the *Références Markdown* quality check.  
**ignore-md-syntax** Skip the *Syntaxe Markdown* quality check.  
**ignore-max-length** Skip the *Taille maximum de la traduction* quality check.  
**ignore-max-size** Skip the *Taille maximale de la traduction* quality check.  
**ignore-escaped-newline** Skip the *Pas de correspondance \n* quality check.  
**ignore-end-colon** Skip the *Incohérence de caractère deux-points* quality check.  
**ignore-end-ellipsis** Skip the *Incohérence de points de suspension* quality check.  
**ignore-end-exclamation** Skip the *Incohérence de point d'exclamation* quality check.  
**ignore-end-stop** Skip the *Incohérence de point final* quality check.  
**ignore-end-question** Skip the *Incohérence de point d'interrogation* quality check.  
**ignore-end-semicolon** Skip the *Incohérence de point-virgule* quality check.  
**ignore-newline-count** Skip the *Incohérence dans les sauts de ligne* quality check.  
**ignore-plurals** Skip the *Pluriels manquants* quality check.  
**ignore-placeholders** Skip the *Balises de remplacement* quality check.  
**ignore-punctuation-spacing** Skip the *Espacement de ponctuation* quality check.  
**ignore-regex** Skip the *Expression rationnelle* quality check.  
**ignore-same-plurals** Skip the *Pluriel identique* quality check.  
**ignore-begin-newline** Skip the *Nouvelle ligne au début* quality check.  
**ignore-begin-space** Skip the *Espaces au début* quality check.  
**ignore-end-newline** Skip the *Saut de ligne à la fin* quality check.  
**ignore-end-space** Skip the *Espace à la fin* quality check.  
**ignore-same** Skip the *Traduction inchangée* quality check.  
**ignore-safe-html** Skip the *HTML non sûr* quality check.  
**ignore-url** Skip the *URL* quality check.  
**ignore-xml-tags** Skip the *Balises XML* quality check.  
**ignore-xml-invalid** Skip the *Syntaxe XML* quality check.  
**ignore-zero-width-space** Skip the *Espace sans chasse* quality check.  
**ignore-ellipsis** Skip the *Points de suspension* quality check.  
**ignore-icu-message-format-syntax** Skip the *Syntaxe ICU MessageFormat* quality check.  
**ignore-long-untranslated** Skip the *Ancienne chaîne non traduite* quality check.  
**ignore-multiple-failures** Skip the *Plusieurs vérifications en échec* quality check.  
**ignore-unnamed-format** Skip the *Multiples variables non nommées* quality check.  
**ignore-optional-plural** Skip the *Non pluralisé* quality check.

---

**Note :** En général, la règle est nommée `ignore-*` pour tout contrôle, en utilisant son identifiant, de sorte que vous pouvez l'utiliser, même pour vos contrôles personnalisés.

---

Ces drapeaux sont compris à la fois dans les paramètres des *Configuration des composants*, par chaîne source et dans le fichier de traduction lui-même (par exemple dans GNU gettext).

### 2.12.3 Exécution des contrôles

Nouveau dans la version 3.11.

Vous pouvez configurer une liste de contrôles qui ne peuvent être ignorés en définissant *Vérifications forcées* dans *Configuration des composants*. Chaque vérification listée ne peut pas être ignorée dans l'interface utilisateur et toute chaîne échouant à cette vérification est marquée comme *Needs editing* (voir *États de traduction*).

### 2.12.4 Gestion des polices

Nouveau dans la version 3.7.

---

**Indication :** Fonts uploaded into Weblate are used purely for purposes of the *Taille maximale de la traduction* check, they do not have an effect in Weblate user interface.

---

La vérification `check-max-size` est utilisée pour calculer les dimensions du texte rendu, la police doit être chargée dans Weblate et sélectionnée à l'aide d'une marque de traduction (voir `:ref:custom-checks`).

L'outil de gestion des polices Weblate dans *Police de caractères* du menu *Gérer* de votre projet de traduction fournit une interface pour télécharger et gérer les polices. Vous pouvez téléverser des polices TrueType et OpenType, configurer des groupes de polices et les utiliser dans la vérification.

Les groupes de polices vous permettent de définir différentes polices pour différentes langues, ce qui est généralement nécessaire pour les langues non latines :

Weblate
Dashboard
Projects
Languages
Checks

WeblateOrg / Font groups / default-font

Font group

Name	default-font		
Default font	Source Sans 3 Bold		
Japanese	language override	Droid Sans Fallback Regular	Remove
Korean	language override	Droid Sans Fallback Regular	Remove
Delete			

Add language override

Language

Font

Save

Edit font group

Font group name

default-font

Identifier you will use in checks to select this font group. Avoid whitespaces and special characters.

Default font

Source Sans 3 Bold


Default font is used unless per language override matches.

Save

Powered by Weblate 4.11

[About Weblate](#)
[Legal](#)
[Contact](#)
[Documentation](#)
[Donate to Weblate](#)

Les groupes de polices sont identifiés par leur nom, qui ne peut pas contenir d'espace ni de caractères spéciaux, afin qu'il puisse être facilement utilisé dans la définition du contrôle :

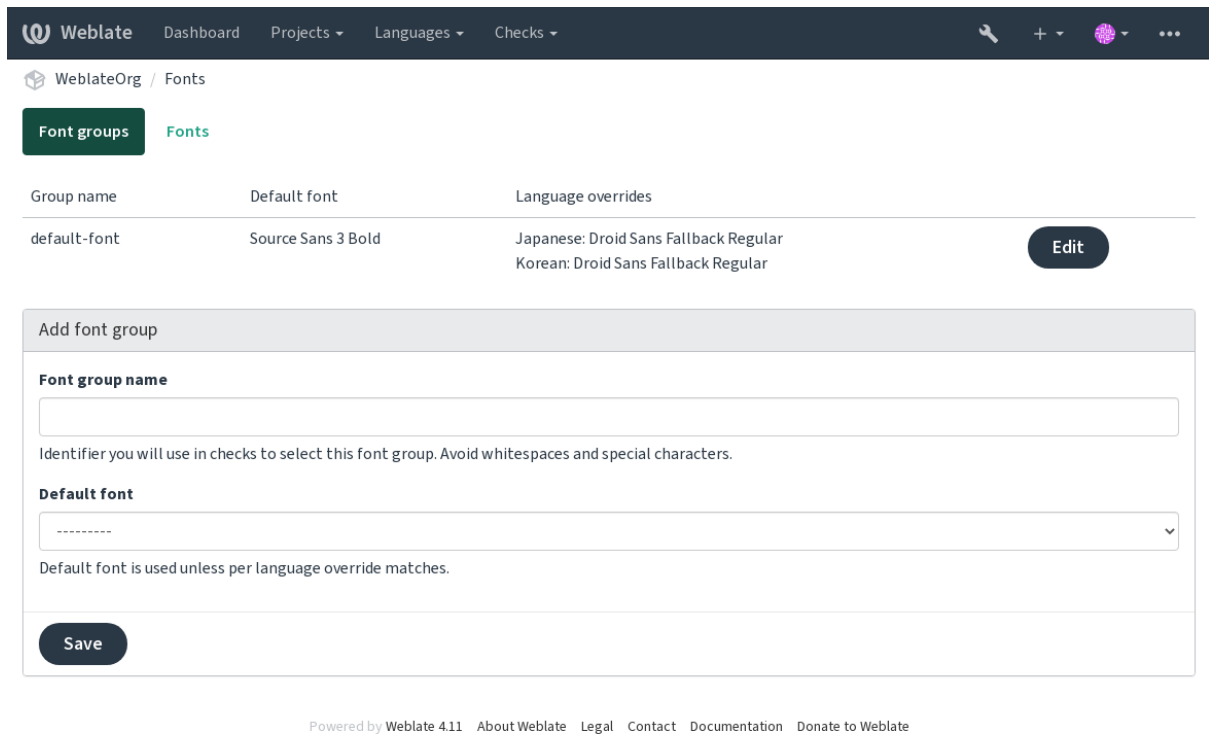

Webate Dashboard Projects Languages Checks

WebateOrg / Fonts

Font groups Fonts

Group name	Default font	Language overrides	
default-font	Source Sans 3 Bold	Japanese: Droid Sans Fallback Regular Korean: Droid Sans Fallback Regular	Edit

Add font group

**Font group name**

Identifier you will use in checks to select this font group. Avoid whitespaces and special characters.


**Default font**

Default font is used unless per language override matches.

Save


Powered by Weblate 4.11 About Weblate Legal Contact Documentation Donate to Weblate

La famille de caractères et le style sont automatiquement reconnus après leur téléchargement :

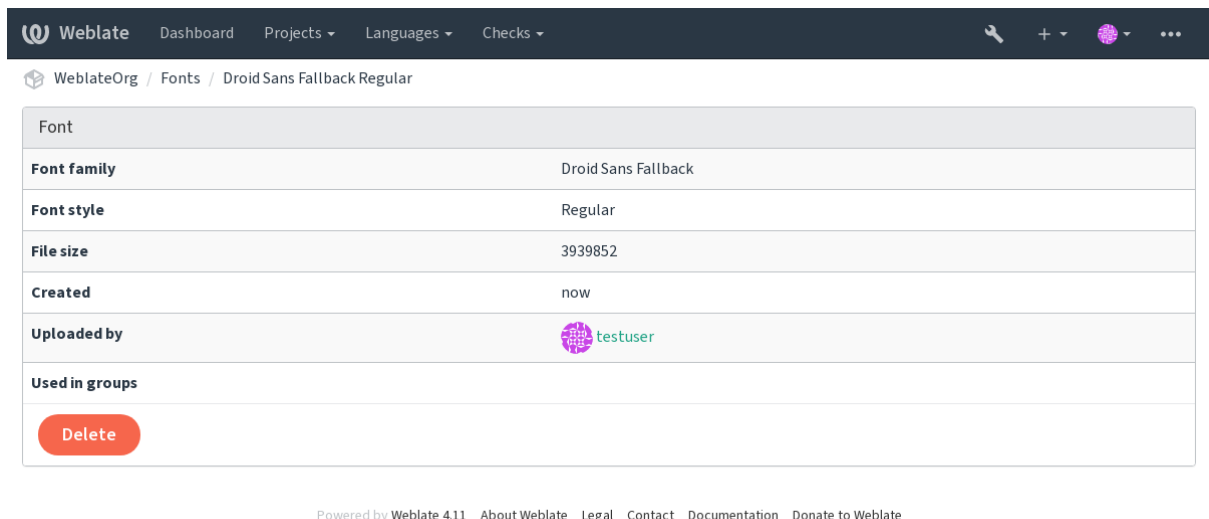


Webate Dashboard Projects Languages Checks

WebateOrg / Fonts / Droid Sans Fallback Regular

Font	
Font family	Droid Sans Fallback
Font style	Regular
File size	3939852
Created	now
Uploaded by	 testuser
Used in groups	
Delete	

Powered by Weblate 4.11 About Weblate Legal Contact Documentation Donate to Weblate

Vous pouvez charger plusieurs polices dans Weblate :

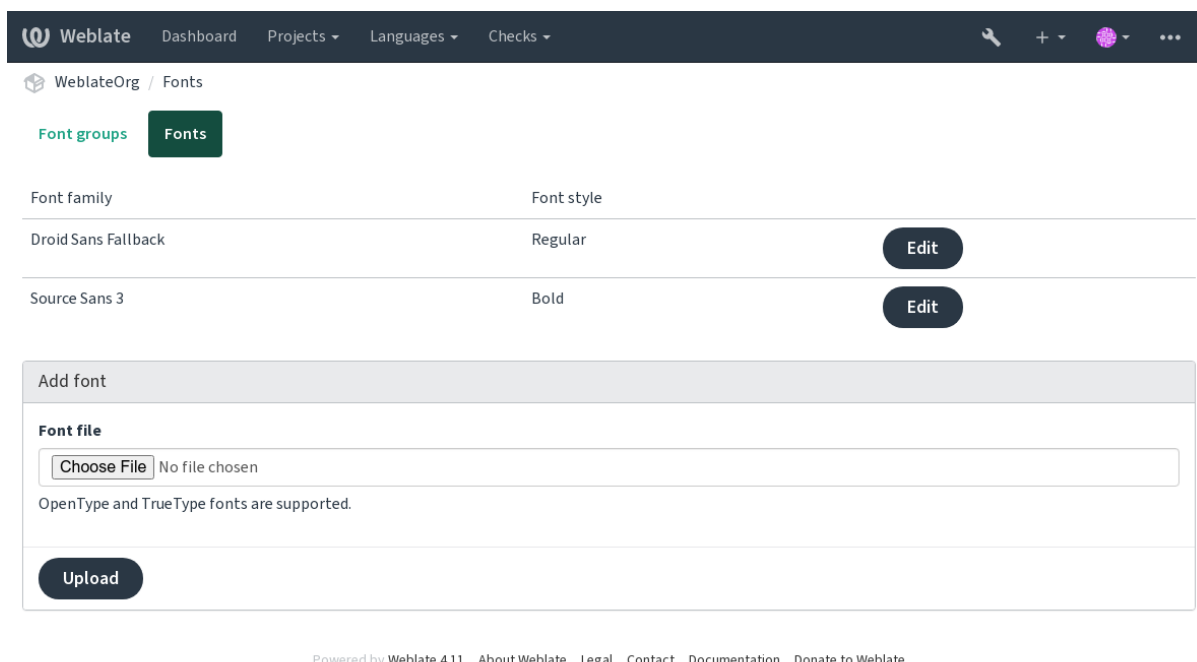

To use the fonts for checking the string length, pass it the appropriate flags (see [Customizing behavior using flags](#)). You will probably need the following ones :

- max-size:500** Defines maximal width in pixels.
- font-family:ubuntu** Defines font group to use by specifying its identifier.
- font-size:22** Defines font size in pixels.

## 2.12.5 Writing own checks

A wide range of quality checks are built-in, (see [Quality checks](#)), though they might not cover everything you want to check. The list of performed checks can be adjusted using [CHECK\\_LIST](#), and you can also add custom checks.

1. Subclass the `weblate.checks.Check`
2. Set a few attributes.
3. Implement either the `check` (if you want to deal with plurals in your code) or the `check_single` method (which does it for you).

Quelques exemples :

To install custom checks, provide a fully-qualified path to the Python class in the [CHECK\\_LIST](#), see [Custom quality checks, add-ons and auto-fixes](#).

### Checking translation text does not contain « foo »

This is a pretty simple check which just checks whether the translation is missing the string « foo ».

```
#
# Copyright © 2012–2022 Michal Čihař <michal@cihar.com>
#
# This file is part of Weblate <https://weblate.org/>
#
# This program is free software: you can redistribute it and/or modify
# it under the terms of the GNU General Public License as published by
# the Free Software Foundation, either version 3 of the License, or
# (at your option) any later version.
#
```

(suite sur la page suivante)



(suite de la page précédente)

```
# This program is distributed in the hope that it will be useful,
# but WITHOUT ANY WARRANTY; without even the implied warranty of
# MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
# GNU General Public License for more details.
#
# You should have received a copy of the GNU General Public License
# along with this program. If not, see <https://www.gnu.org/licenses/>.
#
"""Simple quality check example."""

from django.utils.translation import gettext_lazy as _

from weblate.checks.base import TargetCheck

class FooCheck(TargetCheck):

    # Used as identifier for check, should be unique
    # Has to be shorter than 50 characters
    check_id = "foo"

    # Short name used to display failing check
    name = _("Foo check")

    # Description for failing check
    description = _("Your translation is foo")

    # Real check code
    def check_single(self, source, target, unit):
        return "foo" in target
```

## Checking that Czech translation text plurals differ

Check using language info to verify the two plural forms in Czech language are not same.

```
#
# Copyright © 2012-2022 Michal Čihař <michal@cihar.com>
#
# This file is part of Weblate <https://weblate.org/>
#
# This program is free software: you can redistribute it and/or modify
# it under the terms of the GNU General Public License as published by
# the Free Software Foundation, either version 3 of the License, or
# (at your option) any later version.
#
# This program is distributed in the hope that it will be useful,
# but WITHOUT ANY WARRANTY; without even the implied warranty of
# MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
# GNU General Public License for more details.
#
# You should have received a copy of the GNU General Public License
# along with this program. If not, see <https://www.gnu.org/licenses/>.
#
"""Quality check example for Czech plurals."""

from django.utils.translation import gettext_lazy as _

from weblate.checks.base import TargetCheck
```

(suite sur la page suivante)

```
class PluralCzechCheck(TargetCheck):

    # Used as identifier for check, should be unique
    # Has to be shorter than 50 characters
    check_id = "foo"

    # Short name used to display failing check
    name = _("Foo check")

    # Description for failing check
    description = _("Your translation is foo")

    # Real check code
    def check_target_unit(self, sources, targets, unit):
        if self.is_language(unit, ("cs",)):
            return targets[1] == targets[2]
        return False

    def check_single(self, source, target, unit):
        """We don't check target strings here."""
        return False
```

## 2.13 Traduction automatisée

Built-in support for several machine translation services and can be turned on by the administrator using `MT_SERVICES` for each one. They come subject to their terms of use, so ensure you are allowed to use them how you want.

The source language can be configured at *Configuration du projet*.

### 2.13.1 amaGama

Special installation of `tmserver` run by the authors of Virtaal.

Turn on this service by adding `weblate.machinery.tmserver.AmagamaTranslation` to `MT_SERVICES`.

**Voir aussi :**

Installing amaGama, Amagama, amaGama Translation Memory

### 2.13.2 Apertium

A libre software machine translation platform providing translations to a limited set of languages.

The recommended way to use Apertium is to run your own Apertium-APy server.

Turn on this service by adding `weblate.machinery.apertium.ApertiumAPYTranslation` to `MT_SERVICES` and set `MT_APERTIUM_APY`.

**Voir aussi :**

`MT_APERTIUM_APY`, Apertium website, Apertium APy documentation

### 2.13.3 AWS

Nouveau dans la version 3.1.

Amazon Translate is a neural machine translation service for translating text to and from English across a breadth of supported languages.

1. Turn on this service by adding `weblate.machinery.aws.AWSTranslation` to `MT_SERVICES`.
2. Install the `boto3` module.
3. Configurer Weblate.

**Voir aussi :**

`MT_AWS_REGION`, `MT_AWS_ACCESS_KEY_ID`, `MT_AWS_SECRET_ACCESS_KEY` [Amazon Translate Documentation](#)

### 2.13.4 Baidu API machine translation

Nouveau dans la version 3.2.

Machine translation service provided by Baidu.

This service uses an API and you need to obtain an ID and API key from Baidu to use it.

Turn on this service by adding `weblate.machinery.baidu.BaiduTranslation` to `MT_SERVICES` and set `MT_BAIDU_ID` and `MT_BAIDU_SECRET`.

**Voir aussi :**

`MT_BAIDU_ID`, `MT_BAIDU_SECRET` [Baidu Translate API](#)

### 2.13.5 DeepL

Nouveau dans la version 2.20.

DeepL is paid service providing good machine translation for a few languages. You need to purchase *DeepL API* subscription or you can use legacy *DeepL Pro (classic)* plan.

Turn on this service by adding `weblate.machinery.deepl.DeepLTranslation` to `MT_SERVICES` and set `MT_DEEPL_KEY`.

---

**Indication :** In case you have subscription for CAT tools, you are supposed to use « v1 API » instead of default « v2 » used by Weblate (it is not really an API version in this case). In case you are on a free instead of a paid plan, you have to use `https://api-free.deepl.com/` instead of `https://api.deepl.com/` You can adjust both parameters by `MT_DEEPL_API_URL`.

---

**Voir aussi :**

`MT_DEEPL_KEY`, `MT_DEEPL_API_URL`, [DeepL website](#), [DeepL pricing](#), [DeepL API documentation](#)

### 2.13.6 LibreTranslate

Nouveau dans la version 4.7.1.

LibreTranslate is a free and open-source service for machine translations. The public instance requires an API key, but LibreTranslate can be self-hosted and there are several mirrors available to use the API for free.

Turn on this service by adding `weblate.machinery.libretranslate.LibreTranslateTranslation` to `MT_SERVICES` and set `MT_LIBRETRANSLATE_API_URL`. If your instance requires an API key, you must also set `MT_LIBRETRANSLATE_KEY`.

**Voir aussi :**

[`MT\_LIBRETRANSLATE\_KEY`](#), [`MT\_LIBRETRANSLATE\_API\_URL`](#), LibreTranslate website, LibreTranslate repository, LibreTranslate mirrors

### 2.13.7 Glosbe

Free dictionary and translation memory for almost every living language.

The API is gratis to use, but subject to the used data source license. There is a limit of calls that may be done from one IP in a set period of time, to prevent abuse.

Turn on this service by adding `weblate.machinery.glosbe.GlosbeTranslation` to [`MT\_SERVICES`](#).

**Voir aussi :**

[Glosbe website](#)

### 2.13.8 Google Translate

Machine translation service provided by Google.

This service uses the Google Translation API, and you need to obtain an API key and turn on billing in the Google API console.

To turn on this service, add `weblate.machinery.google.GoogleTranslation` to [`MT\_SERVICES`](#) and set [`MT\_GOOGLE\_KEY`](#).

**Voir aussi :**

[`MT\_GOOGLE\_KEY`](#), [Google translate documentation](#)

### 2.13.9 Google Translate API V3 (Advanced)

Machine translation service provided by Google Cloud services.

This service differs from the former one in how it authenticates. To enable service, add `weblate.machinery.google.v3.GoogleV3Translation` to [`MT\_SERVICES`](#) and set

- [`MT\_GOOGLE\_CREDENTIALS`](#)
- [`MT\_GOOGLE\_PROJECT`](#)

If `location` fails, you may also need to specify [`MT\_GOOGLE\_LOCATION`](#).

**Voir aussi :**

[`MT\_GOOGLE\_CREDENTIALS`](#), [`MT\_GOOGLE\_PROJECT`](#), [`MT\_GOOGLE\_LOCATION`](#) [Google translate documentation](#)

### 2.13.10 Microsoft Cognitive Services Translator

Nouveau dans la version 2.10.

Machine translation service provided by Microsoft in Azure portal as a one of Cognitive Services.

Weblate implements Translator API V3.

To enable this service, add `weblate.machinery.microsoft.MicrosoftCognitiveTranslation` to [`MT\_SERVICES`](#) and set [`MT\_MICROSOFT\_COGNITIVE\_KEY`](#).

## Translator Text API V2

The key you use with Translator API V2 can be used with API 3.

## Translator Text API V3

You need to register at Azure portal and use the key you obtain there. With new Azure keys, you also need to set `MT_MICROSOFT_REGION` to locale of your service.

**Voir aussi :**

`MT_MICROSOFT_COGNITIVE_KEY`, `MT_MICROSOFT_REGION`, Cognitive Services - Text Translation API, Microsoft Azure Portal

### 2.13.11 Microsoft Terminology Service

Nouveau dans la version 2.19.

The Microsoft Terminology Service API allows you to programmatically access the terminology, definitions and user interface (UI) strings available in the Language Portal through a web service.

Turn this service on by adding `weblate.machinery.microsoftterminology.MicrosoftTerminologyService` to `MT_SERVICES`.

**Voir aussi :**

Microsoft Terminology Service API

### 2.13.12 ModernMT

Nouveau dans la version 4.2.

Turn this service on by adding `weblate.machinery.modernmt.ModernMTTranslation` to `MT_SERVICES` and configure `MT_MODERNMT_KEY`.

**Voir aussi :**

ModernMT API, `MT_MODERNMT_KEY`, `MT_MODERNMT_URL`

### 2.13.13 MyMemory

Huge translation memory with machine translation.

Free, anonymous usage is currently limited to 100 requests/day, or to 1000 requests/day when you provide a contact e-mail address in `MT_MYMEMORY_EMAIL`. You can also ask them for more.

Turn on this service by adding `weblate.machinery.mymemory.MyMemoryTranslation` to `MT_SERVICES` and set `MT_MYMEMORY_EMAIL`.

**Voir aussi :**

`MT_MYMEMORY_EMAIL`, `MT_MYMEMORY_USER`, `MT_MYMEMORY_KEY`, MyMemory website

### 2.13.14 NetEase Sight API machine translation

Nouveau dans la version 3.3.

Service de traduction automatique fourni par NetEase.

This service uses an API, and you need to obtain key and secret from NetEase.

Turn on this service by adding `weblate.machinery.youdao.NeteaseSightTranslation` to `MT_SERVICES` and set `MT_NETEASE_KEY` and `MT_NETEASE_SECRET`.

**Voir aussi :**

`MT_NETEASE_KEY`, `MT_NETEASE_SECRET` NetEase Sight Translation Platform

### 2.13.15 tmserver

You can run your own translation memory server by using the one bundled with Translate-toolkit and let Weblate talk to it. You can also use it with an amaGama server, which is an enhanced version of tmserver.

1. First you will want to import some data to the translation memory :
2. Turn on this service by adding `weblate.machinery.tmserver.TMServerTranslation` to `MT_SERVICES`.

```
build_tmdb -d /var/lib/tm/db -s en -t cs locale/cs/LC_MESSAGES/django.po
build_tmdb -d /var/lib/tm/db -s en -t de locale/de/LC_MESSAGES/django.po
build_tmdb -d /var/lib/tm/db -s en -t fr locale/fr/LC_MESSAGES/django.po
```

3. Start tmserver to listen to your requests :

```
tmserver -d /var/lib/tm/db
```

4. Configure Weblate to talk to it :

```
MT_TMSERVER = "http://localhost:8888/tmserver/"
```

**Voir aussi :**

`MT_TMSERVER`, tmserver Installing amaGama, Amagama, Amagama Translation Memory

### 2.13.16 Yandex Translate

Machine translation service provided by Yandex.

This service uses a Translation API, and you need to obtain an API key from Yandex.

Turn on this service by adding `weblate.machinery.yandex.YandexTranslation` to `MT_SERVICES`, and set `MT_YANDEX_KEY`.

**Voir aussi :**

`MT_YANDEX_KEY`, Yandex Translate API, Powered by Yandex.Translate

### 2.13.17 Youdao Zhiyun API machine translation

Nouveau dans la version 3.2.

Machine translation service provided by Youdao.

This service uses an API, and you need to obtain an ID and an API key from Youdao.

Turn on this service by adding `weblate.machinery.youdao.YoudaoTranslation` to `MT_SERVICES` and set `MT_YOUDAO_ID` and `MT_YOUDAO_SECRET`.

**Voir aussi :**

`MT_YOUDAO_ID`, `MT_YOUDAO_SECRET` Youdao Zhiyun Natural Language Translation Service

### 2.13.18 Weblate

Weblate can be the source of machine translations as well. It is based on the Woosh fulltext engine, and provides both exact and inexact matches.

Turn on these services by adding `weblate.machinery.weblatetm.WeblateTranslation` to `MT_SERVICES`.

### 2.13.19 Weblate Translation Memory

Nouveau dans la version 2.20.

The *Mémoire de traduction* can be used as a source for machine translation suggestions as well.

Turn on these services by adding `weblate.memory.machine.WeblateMemory` to the `MT_SERVICES`. This service is turned on by default.

### 2.13.20 SAP Translation Hub

Machine translation service provided by SAP.

You need to have a SAP account (and the SAP Translation Hub enabled in the SAP Cloud Platform) to use this service.

Turn on this service by adding `weblate.machinery.saptranslationhub.SAPTranslationHub` to `MT_SERVICES` and set the appropriate access to either the sandbox or the production API.

---

**Note :** To access the Sandbox API, you need to set `MT_SAP_BASE_URL` and `MT_SAP_SANDBOX_APIKEY`.

To access the productive API, you need to set `MT_SAP_BASE_URL`, `MT_SAP_USERNAME` and `MT_SAP_PASSWORD`.

---

**Voir aussi :**

`MT_SAP_BASE_URL`, `MT_SAP_SANDBOX_APIKEY`, `MT_SAP_USERNAME`, `MT_SAP_PASSWORD`, `MT_SAP_USE_MT` SAP Translation Hub API

### 2.13.21 Custom machine translation

You can also implement your own machine translation services using a few lines of Python code. This example implements machine translation in a fixed list of languages using `dictionary` Python module :

```
#
# Copyright © 2012–2022 Michal Čihař <michal@cihar.com>
#
# This file is part of Weblate <https://weblate.org/>
#
# This program is free software: you can redistribute it and/or modify
# it under the terms of the GNU General Public License as published by
# the Free Software Foundation, either version 3 of the License, or
# (at your option) any later version.
#
# This program is distributed in the hope that it will be useful,
# but WITHOUT ANY WARRANTY; without even the implied warranty of
# MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
# GNU General Public License for more details.
#
# You should have received a copy of the GNU General Public License
# along with this program. If not, see <https://www.gnu.org/licenses/>.
#
"""Machine translation example."""

import dictionary

from weblate.machinery.base import MachineTranslation

class SampleTranslation(MachineTranslation):
    """Sample machine translation interface."""

    name = "Sample"

    def download_languages(self):
        """Return list of languages your machine translation supports."""
        return {"cs"}

    def download_translations(
        self,
        source,
        language,
        text: str,
        unit,
        user,
        search: bool,
        threshold: int = 75,
    ):
        """Return tuple with translations."""
        for t in dictionary.translate(text):
            yield {"text": t, "quality": 100, "service": self.name, "source": text}
```

You can list your own class in `MT_SERVICES` and Weblate will start using that.



## 2.14 Modules


Nouveau dans la version 2.19.


Add-ons provide ways to customize and automate the translation workflow. Admins can add and manage add-ons from the *Manage* ↓ *Add-ons* menu of each respective translation component.

---

**Indication :** You can also configure add-ons using [API](#), `DEFAULT_ADDONS`, or `install_addon`.

---



Weblate
Dashboard
Projects
Languages
Checks


WeblateOrg / Language names / Add-ons

Installed add-ons


There are no add-ons currently installed.

Available add-ons


Automatic translation

Automatically translates strings using machine translation or other components.


Install


Add missing languages

Ensures a consistent set of languages is used for all components within a project.

project wide


Install


Component discovery

Automatically adds or removes project components based on file changes in the version control system.


repository wide

Install


Bulk edit


Bulkedit flags, labels, or states of strings.

Install


Statistics generator


Generates a file containing detailed info about the translation status.

Install


Prefill translation with source


Fills in translation strings with source string.

Install


Pseudolocale generation


Generates a translation by adding prefix and suffix to source strings automatically.

Install


Contributors in comment


Updates the comment part of the PO file header to include contributor names and years of contributions.

Install


Customize gettext output


Allows customization of gettext output behavior, for example line wrapping.

Install


Generate MO files


Automatically generates a MO file for every changed PO file.

Install


Update PO files to match POT (msgmerge)

Updates all PO files (as configured by "File mask") to match the POT file (as configured by "Template for new translations") using msgmerge.


Install


Squash Git commits

Squash Git commits prior to pushing changes.

repository wide


Install


Stale comment removal

Set a timeframe for removal of comments.

project wide

Install


Stale suggestion removal

Set a timeframe for removal of suggestions.

project wide

Install

Some add-ons will ask for additional configuration during installation.

## 2.14.1 Built-in add-ons

### Traduction automatique

Nouveau dans la version 3.9.

**ID du module** `weblate.autotranslate.autotranslate`

#### Configuration

mode	Mode de traduction automatique	Available choices : suggest – Add as suggestion translate – Add as translation fuzzy – Add as needing edit
filter_type	Filtre de recherche	Veillez noter que traduire toutes les chaînes écrasera les traductions existantes. Available choices : all – All strings nottranslated – Chaînes non traduites todo – Unfinished strings fuzzy – Strings marked for edit check:inconsistent – Failing check : Inconsistent
auto_source	Source de traduction automatique	Available choices : others – Other translation components mt – Machine translation
components	Composants	Précisez le composant à utiliser comme source, laissez vide pour utiliser tous les composants du projet actuel.
engines	Moteurs de traduction automatisée	
thresholdscore	Seuil de score	

**Triggers** component update, daily

Traduit automatiquement les chaînes en utilisant des services de traduction automatique ou les traductions dans d'autres composants.

Il est déclenché :

- When new strings appear in a component.
- Once in a month for every component, this can be configured using `BACKGROUND_TASKS`.

**Voir aussi :**

*Traduction automatique, Keeping translations same across components*

### JavaScript localisation CDN

Nouveau dans la version 4.2.

**ID du module** `weblate.cdn.cdnjs`

#### Configuration

threshold	Seuil de traduction	Seuil d'inclusion des traductions.
css_selector	Sélecteur CSS	Sélecteur CSS pour détecter les éléments traduisibles.
cookie_name	Nom du cookie de langue	Nom du cookie contenant la langue préférée.
files	Extraire des chaînes de caractères depuis des fichiers HTML	Liste des noms de fichiers dans le dépôt actuel ou des URL distantes à analyser pour les chaînes traduisibles.

**Triggers** daily, repository post-commit, repository post-update

Publie les traductions dans le réseau de diffusion de contenu (CDN) pour utilisation dans la localisation JavaScript ou HTML.

Can be used to localize static HTML pages, or to load localization in the JavaScript code.

Generates a unique URL for your component you can include in HTML pages to localize them. See weblate-cdn for more details.

**Voir aussi :**

cdn-addon-config, weblate-cdn, cdn-addon-extract, cdn-addon-html

## Supprimer les chaînes constituées d'espaces

Nouveau dans la version 4.4.

**ID du module** `weblate.cleanup.blank`

**Configuration** *Ce module ne possède aucun paramètre.*

**Triggers** repository post-commit, repository post-update

Supprime les chaînes sans traduction des fichiers de traduction.

Use this to not have any empty strings in translation files (for example if your localization library displays them as missing instead of falling back to the source string).

**Voir aussi :**

*Does Weblate update translation files besides translations ?*

## Nettoyer les fichiers de traduction

**ID du module** `weblate.cleanup.generic`

**Configuration** *Ce module ne possède aucun paramètre.*

**Triggers** repository pre-commit, repository post-update

Mettre à jour tous les fichiers de traduction pour qu'ils correspondent au fichier mono-langue de base. Pour la plupart des formats de fichier, cela signifie supprimer les clés de traduction désuètes.

**Voir aussi :**

*Does Weblate update translation files besides translations ?*

## Ajouter les langues manquantes

**ID du module** `weblate.consistency.languages`

**Configuration** *Ce module ne possède aucun paramètre.*

**Triggers** `daily`, `repository` `post-add`

S'assure qu'un ensemble cohérent de langues est utilisé pour tous les composants d'un projet.

Missing languages are checked once every 24 hours, and when new languages are added in Weblate.

Contrairement à d'habitude, ce module s'applique à l'ensemble du projet.

---

**Indication :** Traduisez automatiquement les chaînes de caractères nouvellement ajoutées avec *Traduction automatique*.

---

## Découverte du composant

**ID du module** `weblate.discovery.discovery`

**Configuration**

<code>match</code>	Expression rationnelle à laquelle faire correspondre les fichiers de traduction	
<code>file_format</code>	Format de fichier	
<code>name_template</code>	Personnaliser le nom du composant	
<code>base_file</code>	Définir le nom du fichier de base mono-langue	Laisser vide pour les fichiers de traduction bilingue.
<code>new_base_file</code>	Définir le fichier de base pour de nouvelles traductions	Nom du fichier utilisé pour la création de nouvelles traductions. Pour gettext choisir un fichier .pot.
<code>language_regex</code>	Filtre sur la langue	Expression rationnelle pour filtrer les fichiers de traduction lors de la recherche d'un motif de fichier.
<code>copy_addons</code>	Dupliquer les modules du composant principal vers les éléments nouvellement créés	
<code>remove</code>	Supprimer les composants pour les fichiers inexistants	
<code>confirm</code>	Je confirme que les correspondances ci-dessus semblent correctes	

**Triggers** `repository` `post-update`

Ajoute ou supprime automatiquement des composants du projet en fonction des fichiers modifiés dans le système de contrôle de version.

Triggered each time the VCS is updated, and otherwise similar to the `import_project` management command. This way you can track multiple translation components within one VCS.

The matching is done using regular expressions enabling complex configuration, but some knowledge is required to do so. Some examples for common use cases can be found in the add-on help section.

Une fois que vous aurez cliqué sur *Enregistrer*, un aperçu des composants correspondants sera présenté, à partir duquel vous pourrez vérifier si la configuration correspond réellement à vos besoins :

Weblate

Dashboard

Projects

Languages

Checks

+

WeblateOrg

Language names

Add-ons

Component discovery

Configure add-on

Please review and confirm the matched components.

Component	Matched files
The following components would be created	
Djangojs	<div>weblate/locale/he/LC_MESSAGES/djangojs.po (he)</div> <div>weblate/locale/cs/LC_MESSAGES/djangojs.po (cs)</div> <div>weblate/locale/hu/LC_MESSAGES/djangojs.po (hu)</div>
Django	<div>weblate/locale/hu/LC_MESSAGES/django.po (hu)</div> <div>weblate/locale/he/LC_MESSAGES/django.po (he)</div> <div>weblate/locale/cs/LC_MESSAGES/django.po (cs)</div>

☐ I confirm the above matches look correct

Regular expression to match translation files against

weblate/locale/(?P<language>[^/]+)/LC\_MESSAGES/(?P<component>[^/]+)\.po

File format

gettext PO file

Customize the component name

{{ component|title }}

Define the monolingual base filename

Leave empty for bilingual translation files.

Define the base file for new translations

weblate/locale/{{ component }}.pot

Filename of file used for creating new translations. For gettext choose .pot file.

Language filter

^(cs|he|hu)\$

Regular expression to filter translation files against when scanning for file mask.

☒ Clone add-ons from the main component to the newly created ones

☐ Remove components for inexistant files

The regular expression to match translation files has to contain two named groups to match component and language, some examples:

Regular expression	Example matched files	Description
<div>(?P&lt;language&gt;[^/\.]+)/(?P&lt;component&gt;[^/\.]+\).po</div>	<div>cs/application.po</div> <div>cs/website.po</div> <div>de/application.po</div> <div>de/website.po</div>	One folder per language containing translation files for components.
<div>locale/(?P&lt;language&gt;[^/\.]+)/LC_MESSAGES/(?P&lt;component&gt;[^/\.]+\).po</div>	<div>locale/cs/LC_MESSAGES/application.po</div> <div>locale/cs/LC_MESSAGES/website.po</div> <div>locale/de/LC_MESSAGES/application.po</div> <div>locale/de/LC_MESSAGES/website.po</div>	Usual structure for storing gettext PO files.
<div>src/locale/(?P&lt;component&gt;[^/\.]+\).(P&lt;language&gt;[^/\.]+\).po</div>	<div>src/locale/application.cs.po</div> <div>src/locale/website.cs.po</div> <div>src/locale/application.de.po</div> <div>src/locale/website.de.po</div>	Using both component and language name within filename.
<div>locale/(?P&lt;language&gt;[^/\.]+)/(?P&lt;component&gt;[^/\.]+)/(P=language)\.po</div>	<div>locale/cs/application/cs.po</div> <div>locale/cs/website/cs.po</div> <div>locale/de/application/de.po</div> <div>locale/de/website/de.po</div>	Using language in both path and filename.
<div>res/values-(P&lt;language&gt;[^/\.]+)/strings-(P&lt;component&gt;[^/\.]+\).xml</div>	<div>res/values-cs/strings-about.xml</div> <div>res/values-cs/strings-help.xml</div> <div>res/values-de/strings-about.xml</div> <div>res/values-de/strings-help.xml</div>	Android resource strings, split into several files.

You can use Django template markup in both component name and the monolingual base filename, for example:

{{ component }}

Component filename match

{{ component|title }}

Component filename with upper case first letter

Save

**Indication :** Component discovery add-on uses *Weblate internal URLs*. It's a convenient way to share VCS setup between multiple components. Linked components use the local repository of the main component set up by filling `weblate://project/main-component` into the *Dépôt du code source* field (in *Manage* ↓ *Settings* ↓ *Version control system*) of each respective component. This saves time with configuration and system resources too.

**Voir aussi :**

*Balisage de modèle*

## Modification en masse

Nouveau dans la version 3.11.

**ID du module** `weblate.flags.bulk`

### Configuration

q	Requête	
state	État à paramétrer	Available choices : -1 – Do not change 10 – Needs editing 20 – Translated 30 – Approved
add_flags	Drapeaux de traduction à ajouter	
re-move_flag	Drapeaux de traduction à supprimer	
add_labels	Libellés à ajouter	
re-move_labels	Libellés à supprimer	

**Triggers** component update

Modifier en masse les drapeaux, les libellés ou les statuts des chaînes.

Automate labeling by starting out with the search query `NOT has:label` and add labels till all strings have all required labels. Other automated operations for Weblate metadata can also be done.

**Exemples :**

Tableau 5 – Label new strings automatically

Requête de recherche	<code>NOT has:label</code>
Libellés à ajouter	<i>récent</i>

Tableau 6 – Marking all Fichiers de métadonnées de l'App Store changelog strings read-only

Requête de recherche	<code>language:en AND key:changelogs/</code>
Drapeaux de traduction à ajouter	<code>read-only</code>

**Voir aussi :**

*Modification en masse, Customizing behavior using flags, labels*

### Marquer les traductions inchangées comme « À vérifier »

Nouveau dans la version 3.1.

**ID du module** `weblate.flags.same_edit`

**Configuration** *Ce module ne possède aucun paramètre.*

**Triggers** unit post-create

Chaque nouvelle chaîne de traduction importée depuis le système de contrôle des versions et identique à la chaîne source sera marquée comme « À vérifier » dans Weblate. Ce paramètre est particulièrement utile pour les formats de fichier contenant une copie des chaînes sources dans les chaînes à traduire.

---

**Indication :** You might also want to tighten the *Traduction inchangée* check by adding `strict-same` flag to *Drapeaux de traduction*.

---

**Voir aussi :**

*États de traduction*

### Marquer les nouvelles chaînes sources comme « À vérifier »

**ID du module** `weblate.flags.source_edit`

**Configuration** *Ce module ne possède aucun paramètre.*

**Triggers** unit post-create

Quand une nouvelle chaîne source est importée du système de contrôle de versions, elle est marquée dans Weblate comme « À vérifier ». Vous pouvez ainsi filtrer et modifier facilement les chaînes sources rédigées par les développeurs.

**Voir aussi :**

*États de traduction*

### Marquer les nouvelles traductions comme « À vérifier »

**ID du module** `weblate.flags.target_edit`

**Configuration** *Ce module ne possède aucun paramètre.*

**Triggers** unit post-create

Lorsqu'une nouvelle chaîne à traduire est importée dans Weblate depuis le système de contrôle de versions, elle est marquée comme « À vérifier ». Vous pouvez ainsi filtrer et modifier facilement les traductions créées par les développeurs.

**Voir aussi :**

*États de traduction*

### Générateur de statistiques

**ID du module** `weblate.generate.generate`

**Configuration**

filename	Nom du fichier généré	
template	Contenu du fichier généré	

**Triggers** repository pre-commit



Génère un fichier avec des informations détaillées sur les statuts de la traduction.

You can use a Django template in both filename and content, see *Balisage de modèle* for a detailed markup description.

For example generating a summary file for each translation :

**Nom du fichier généré** locale/{{ language\_code }}.json

**Contenu**

```
{
  "language": "{{ language_code }}",
  "strings": "{{ stats.all }}",
  "translated": "{{ stats.translated }}",
  "last_changed": "{{ stats.last_changed }}",
  "last_author": "{{ stats.last_author }}"
}
```

**Voir aussi :**

*Balisage de modèle*

## Pré-remplir la traduction avec la source

Nouveau dans la version 4.11.

**ID du module** weblate.generate.prefill

**Configuration** *Ce module ne possède aucun paramètre.*

**Triggers** component update, daily

Alimente les chaînes de traduction avec la chaîne source.

All untranslated strings in the component will be filled with the source string, and marked as needing edit. Use this when you can not have empty strings in the translation files.

## Génération d'une pseudo-traduction

Nouveau dans la version 4.5.

**ID du module** weblate.generate.pseudolocale

**Configuration**

source	Chaînes sources	
target	Traduction cible	
prefix	Préfixe de la chaîne	
suffix	Suffixe de la chaîne	

**Triggers** component update, daily

Génère une pseudo-traduction en ajoutant automatiquement un préfixe et un suffixe aux chaînes sources.

Pseudolocales are useful to find strings that are not prepared for localization. This is done by altering all translatable source strings to make it easy to spot unaltered strings when running the application in the pseudolocale language.

Finding strings whose localized counterparts might not fit the layout is also possible.

---

**Indication :** Vous pouvez utiliser des langues réelles pour les tests, mais il existe des pseudo-traductions dédiées disponibles dans Weblate — *en\_XA* et *ar\_XB*.

---



---

**Indication :** You can use this add-on to start translation to a new locale of an existing language or similar language. Once you add the translation to the component, follow to the add-on. *Example :* If you have *fr* and want to start *fr\_CA* translation, simply set *fr* as the source, *fr\_CA* as the target, and leave the prefix and suffix blank.

---

Uninstall the add-on once you have the new translation filled to prevent Weblate from changing the translations made after the copying.

---

### Contributeurs dans le commentaire

**ID du module** `weblate.gettext.authors`

**Configuration** *Ce module ne possède aucun paramètre.*

**Triggers** repository pre-commit

Ajoute le nom des contributeurs et les années de contribution dans le commentaire d'en-tête du fichier PO.

The PO file header will look like this :

```
# Michal Čihař <michal@cihar.com>, 2012, 2018, 2019, 2020.
# Pavel Borecki <pavel@example.com>, 2018, 2019.
# Filip Hron <filip@example.com>, 2018, 2019.
# anonymous <noreply@weblate.org>, 2019.
```

### Mettre à jour la variable ALL\_LINGUAS dans le fichier « configure »

**ID du module** `weblate.gettext.configure`

**Configuration** *Ce module ne possède aucun paramètre.*

**Triggers** repository post-add, daily

Met à jour la variable ALL\_LINGUAS dans les fichiers `configure`, `configure.in` ou `configure.ac`, lorsqu'une nouvelle traduction est ajoutée.

### Personnaliser la sortie gettext

**ID du module** `weblate.gettext.customize`

**Configuration**

width	Retour à la ligne des lignes longues	Par défaut, gettext retourne à la ligne à 77 caractères et pour les nouvelles lignes. Avec le paramètre «--no-wrap», le retour à la ligne n'est réalisé que pour les nouvelles lignes. Available choices : 77 – Wrap lines at 77 characters and at newlines 65535 – Only wrap lines at newlines -1 – No line wrapping
-------	--------------------------------------	---

**Triggers** storage post-load

Permet de personnaliser la sortie de gettext, par exemple le retour à la ligne automatique.

Il offre les options suivantes :

- Retour à la ligne à 77 caractères et pour les nouvelles lignes
- Retour à la ligne automatique uniquement pour les nouvelles lignes
- Aucun retour à la ligne automatique

---

**Note :** By default gettext wraps lines at 77 characters and at newlines. With the `--no-wrap` parameter, wrapping is only done at newlines.

---

## Mettre à jour le fichier LINGUAS

**ID du module** `weblate.gettext.linguas`

**Configuration** *Ce module ne possède aucun paramètre.*

**Triggers** repository post-add, daily

Met à jour le fichier LINGUAS lors de l'ajout d'une nouvelle traduction.

## Générer des fichiers MO

**ID du module** `weblate.gettext.mo`

**Configuration**

path	Chemin du fichier MO généré	Si non précisé, l'emplacement utilisé sera identique à celui du fichier PO.
------	-----------------------------	---

**Triggers** repository pre-commit

Génère automatiquement un fichier MO pour chaque fichier PO modifié.

L'emplacement du fichier MO généré peut être personnalisé et le champ pour cela utilise *Balisage de modèle*.

## Mettre à jour les fichiers PO afin qu'ils correspondent au POT (msgmerge)

**ID du module** `weblate.gettext.msgmerge`

**Configuration**

previous	Conserver les msgids précédents des chaînes traduites	
no_location	Supprimer l'emplacement des chaînes traduites	
fuzzy	Utiliser les correspondances approximatives	

**Triggers** repository post-update

Met à jour tous les fichiers PO (tels que configuré par *Masque de fichier*) pour correspondre au fichier POT (tel que configuré par *Modèle pour les nouvelles traductions*) en utilisant **msgmerge**.

Triggered whenever new changes are pulled from the upstream repository. Most msgmerge command-line options can be set up through the add-on configuration.

**Voir aussi :**

*Does Weblate update translation files besides translations ?*

## Écrasement des archivages Git

**ID du module** `weblate.git.squash`

**Configuration**

squash	Écrasement des archivages	Available choices : all – All commits into one language – Per language file – Per file author – Per author
append_headers	Ajout de champs d'entêtes aux messages d'écrasement des archivages	Les lignes de fin sont des lignes comparables aux lignes d'entête RFC 822 pour les courriels. Ces lignes sont ajoutées en fin de la partie libre du message d'archivage. Exemple : « Co-authored-by : ... ».
commit_message	Message d'archivage	Ce message d'archivage sera utilisé à la place des messages d'archivage combinés des archivages écrasés.

**Triggers** repository post-commit

Écraser les archivages Git avant de pousser les modifications.

Git commits can be squashed prior to pushing changes in one of the following modes :

- Tous les archivages en un seul
- Par langue
- Par fichier
- Par auteur

Les messages d'archivage originaux sont préservés mais perdront la paternité de l'archivage, sauf si vous sélectionnez *Par auteur* ou si vous personnalisez le message d'archivage pour l'inclure.

The original commit messages can optionally be overridden with a custom commit message. See [Balisage de modèle](#) for the message options.

Les Trailers (lignes d'archivage comme `Co-authored-by: ...`) peuvent éventuellement être supprimés des messages d'archivage originaux et ajoutés à la fin du message d'archivage écrasé. Ceci génère également un crédit `Co-authored-by:` pour chaque traducteur.

## Personnaliser la sortie JSON

**ID du module** `weblate.json.customize`

**Configuration**

<code>sort_keys</code>	Trier les clés JSON	
<code>indent</code>	Indentation JSON	
<code>style</code>	Style d'indentation JSON	Available choices : spaces – Spaces tabs – Tabs

**Triggers** storage post-load

Permet de paramétrer le comportement de la sortie de JSON, par exemple l'indentation ou le tri.

## Formate le fichier de propriétés Java

**ID du module** `weblate.properties.sort`

**Configuration** *Ce module ne possède aucun paramètre.*

**Triggers** repository pre-commit

Trie le fichier de propriétés Java.

## Purge automatique des commentaires

Nouveau dans la version 3.7.

**ID du module** `weblate.removal.comments`

**Configuration**

<code>age</code>	Nombre de jours à conserver	
------------------	-----------------------------	--

**Triggers** daily

Définir le délai au bout duquel les commentaires sont supprimés.

This can be useful to remove old comments which might have become outdated. Use with care as comments getting old does not mean they have lost their importance.

## Purge automatique des suggestions

Nouveau dans la version 3.7.

**ID du module** `weblate.removal.suggestions`

### Configuration

age	Nombre de jours à conserver	
votes	Seuil de votes	Seuil pour la suppression d'une suggestion. Ce champ est sans effet lorsque le vote est désactivé.

**Triggers** `daily`

Définir le délai au bout duquel les suggestions sont supprimées.

Can be very useful in connection with suggestion voting (see [Peer review](#)) to remove suggestions which don't receive enough positive votes in a given timeframe.

## Mettre à jour les fichiers RESX

Nouveau dans la version 3.9.

**ID du module** `weblate.resx.update`

**Configuration** *Ce module ne possède aucun paramètre.*

**Triggers** `repository post-update`

Mettre à jour tous les fichiers de traduction pour qu'ils correspondent au fichier de base amont monolingue. Les chaînes inutilisées sont supprimées et de nouvelles chaînes sont ajoutées en copiant la chaîne source.

---

**Indication :** Utilisez *Nettoyer les fichiers de traduction* si vous voulez seulement supprimer les clés de traduction périmées.

---

### Voir aussi :

*Does Weblate update translation files besides translations ?*

## Personnaliser la sortie YAML

Nouveau dans la version 3.10.2.

**ID du module** `weblate.yaml.customize`

### Configuration

indent	Indentation YAML	
width	Retour à la ligne des lignes longues	Available choices : 80 – Wrap lines at 80 chars 100 – Wrap lines at 100 chars 120 – Wrap lines at 120 chars 180 – Wrap lines at 180 chars 65535 – No line wrapping
line_break	Retour à la ligne automatique	Available choices : dos – DOS (\r\n) unix – UNIX (\n) mac – MAC (\r)

**Triggers** `storage post-load`

Permet de paramétrer le comportement de la sortie YAML, par exemple la longueur des lignes ou le saut de ligne.

## 2.14.2 Customizing list of add-ons

The list of add-ons is configured by `WEBLATE_ADDONS`. To add another add-on, simply include the absolute class name in this setting.

## 2.14.3 Writing add-on

You can write your own add-ons too, create a subclass of `weblate.addons.base.BaseAddon` to define the add-on metadata, and then implement a callback to do the processing.

**Voir aussi :**

*Développement de greffons*

## 2.14.4 Executing scripts from add-on

Add-ons can also be used to execute external scripts. This used to be integrated in Weblate, but now you have to write some code to wrap your script with an add-on.

```
#
# Copyright © 2012-2022 Michal Čihař <michal@cihar.com>
#
# This file is part of Weblate <https://weblate.org/>
#
# This program is free software: you can redistribute it and/or modify
# it under the terms of the GNU General Public License as published by
# the Free Software Foundation, either version 3 of the License, or
# (at your option) any later version.
#
# This program is distributed in the hope that it will be useful,
# but WITHOUT ANY WARRANTY; without even the implied warranty of
# MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
# GNU General Public License for more details.
#
# You should have received a copy of the GNU General Public License
# along with this program. If not, see <https://www.gnu.org/licenses/>.
#
"""Example pre commit script."""

from django.utils.translation import gettext_lazy as _

from weblate.addons.events import EVENT_PRE_COMMIT
from weblate.addons.scripts import BaseScriptAddon

class ExamplePreAddon(BaseScriptAddon):
    # Event used to trigger the script
    events = (EVENT_PRE_COMMIT,)
    # Name of the addon, has to be unique
    name = "weblate.example.pre"
    # Verbose name and long description
    verbose = _("Execute script before commit")
    description = _("This add-on executes a script.")

    # Script to execute
    script = "/bin/true"
    # File to add in commit (for pre commit event)
    # does not have to be set
    add_file = "po/{{ language_code }}.po"
```

Pour les instructions d'installation, consultez *Custom quality checks, add-ons and auto-fixes*.

Le script est exécuté avec le répertoire courant placé à la racine du dépôt de système de contrôle des versions pour un composant donné.

En outre, les variables d'environnement suivantes sont disponibles :

**WL\_VCS**

Système de contrôle de version utilisé.

**WL\_REPO**

URL du dépôt en amont.

**WL\_PATH**

Chemin absolu vers le dépôt du système de contrôle des versions.

**WL\_BRANCH**

Nouveau dans la version 2.11.

Branche du dépôt configurée dans le composant actuel.

**WL\_FILEMASK**

Masque de fichier pour le composant actuel.

**WL\_TEMPLATE**

Nom de fichier du modèle pour les traductions monolingues (peut être vide).

**WL\_NEW\_BASE**

Nouveau dans la version 2.14.

Nom de fichier du fichier utilisé pour créer de nouvelles traductions (peut être vide).

**WL\_FILE\_FORMAT**

File format used in current component.

**WL\_LANGUAGE**

Language of currently processed translation (not available for component-level hooks).

**WL\_PREVIOUS\_HEAD**

Previous HEAD after update (only available after running the post-update hook).

**WL\_COMPONENT\_SLUG**

Nouveau dans la version 3.9.

Identifiant du composant utilisé pour construire l'URL.

**WL\_PROJECT\_SLUG**

Nouveau dans la version 3.9.

Identifiant du projet utilisé pour construire l'URL.

**WL\_COMPONENT\_NAME**

Nouveau dans la version 3.9.

Nom du composant.

**WL\_PROJECT\_NAME**

Nouveau dans la version 3.9.

Nom du projet.

**WL\_COMPONENT\_URL**

Nouveau dans la version 3.9.

URL du composant.

**WL\_ENGAGE\_URL**

Nouveau dans la version 3.9.

URL d'engagement du projet.

**Voir aussi :**

*Configuration des composants*

## Post-update repository processing

Can be used to update translation files when the VCS upstream source changes. To achieve this, please remember Weblate only sees files committed to the VCS, so you need to commit changes as a part of the script.

Par exemple, avec Gulp, vous pouvez le faire en utilisant le code suivant :

```
#!/bin/sh
gulp --gulpfile gulp-i18n-extract.js
git commit -m 'Update source strings' src/languages/en.lang.json
```

## Pre-commit processing of translations

Use the commit script to automatically change a translation before it is committed to the repository.

Il est transmis en tant que paramètre unique composé du nom de fichier d'une traduction en cours.

## 2.15 Mémoire de traduction

Nouveau dans la version 2.20.

Weblate comes with a built-in translation memory consisting of the following :

- Manually imported translation memory (see *Interface utilisateur*).
- Automatically stored translations performed in Weblate (depending on *Translation memory scopes*).
- Automatically imported past translations.

Content in the translation memory can be applied one of two ways :

- Manually, *Suggestions automatiques* view while translating.
- Automatically, by translating strings using *Traduction automatique*, or *Traduction automatique* add-on.

For installation tips, see *Weblate Translation Memory*, which is turned on by default.

### 2.15.1 Translation memory scopes

Nouveau dans la version 3.2 : In earlier versions translation memory could be only loaded from a file corresponding to the current imported translation memory scope.

The translation memory scopes are there to allow both privacy and sharing of translations, to suit the desired behavior.

### Imported translation memory

Importing arbitrary translation memory data using the *import\_memory* command makes memory content available to all users and projects.

### Per user translation memory

Stores all user translations automatically in the personal translation memory of each respective user.



## Per project translation memory

All translations within a project are automatically stored in a project translation memory only available for this project.

## Mémoire de traduction partagé

All translation within projects with shared translation memory turned on are stored in a shared translation memory available to all projects.

Please consider carefully whether to turn this feature on for shared Weblate installations, as it can have severe implications :

- The translations can be used by anybody else.
- This might lead to disclosing secret information.

## 2.15.2 Managing translation memory

### Interface utilisateur

Nouveau dans la version 3.2.

In the basic user interface you can manage per user and per project translation memories. It can be used to download, wipe or import translation memory.

**Indication :** Translation memory in JSON can be imported into Weblate, TMX is provided for interoperability with other tools.

### Voir aussi :

*Schéma de mémoire des traductions Weblate*

The screenshot shows the Weblate web interface. At the top is a dark navigation bar with the Weblate logo and links for Dashboard, Projects, Languages, and Checks. Below this is a breadcrumb trail: testuser / Translation memory. The main content area is divided into two sections. The first section, 'Translation memory status', has a light gray header and contains a table with two rows: 'Number of your entries' with a value of 0 and 'Total number of entries' with a value of 0. To the right of the table are three buttons: 'Download as JSON' (dark blue), 'Download as TMX' (dark blue), and 'Delete' (red). The second section, 'Import translation memory', also has a light gray header and contains a 'File' upload area. It features a 'Choose File' button, the text 'No file chosen', and a note: 'You can upload a TMX or JSON file.' At the bottom of this section is an 'Upload' button.

## Interface de gestion

There are several management commands to manipulate the translation memory content. These operate on the translation memory as whole, unfiltered by scopes (unless requested by parameters) :

*`dump_memory`* Exports the memory into JSON

*`import_memory`* Imports TMX or JSON files into the translation memory

## 2.16 Configuration

All settings are stored in `settings.py` (as is usual for Django).

---

**Note :** After changing any of these settings, you need to restart Weblate - both WSGI and Celery processes.

In case it is run as `mod_wsgi`, you need to restart Apache to reload the configuration.

---

### Voir aussi :

Please also check [Django's documentation](#) for parameters configuring Django itself.

### 2.16.1 AKISMET\_API\_KEY

Weblate can use Akismet to check incoming anonymous suggestions for spam. Visit [akismet.com](https://akismet.com) to purchase an API key and associate it with a site.

### 2.16.2 ANONYMOUS\_USER\_NAME

Username of users that are not signed in.

#### Voir aussi :

*Contrôle d'accès*

### 2.16.3 AUDITLOG\_EXPIRY

Nouveau dans la version 3.6.

How many days Weblate should keep audit logs, which contain info about account activity.

Defaults to 180 days.

### 2.16.4 AUTH\_LOCK\_ATTEMPTS

Nouveau dans la version 2.14.

Maximum number of failed authentication attempts before rate limiting is applied.

This is currently applied in the following locations :

- Sign in. Deletes the account password, preventing the user from signing in without requesting a new password.
- Password reset. Prevents new e-mails from being sent, avoiding spamming users with too many password reset attempts.

Defaults to 10.

#### Voir aussi :

*Limite de requêtes*

## 2.16.5 AUTO\_UPDATE

Nouveau dans la version 3.2.

Modifié dans la version 3.11 : The original on/off option was changed to differentiate which strings are accepted.

Updates all repositories on a daily basis.

---

**Indication :** Useful if you are not using *Déclencheurs de notification* to update Weblate repositories automatically.

---

---

**Note :** On/off options exist in addition to string selection for backward compatibility.

---

Les options sont :

"**none**" No daily updates.

"**remote**" et **False** Only update remotes.

"**full**" et **True** Update remotes and merge working copy.

---

**Note :** This requires that *Background tasks using Celery* is working, and will take effect after it is restarted.

---

## 2.16.6 AVATAR\_URL\_PREFIX

Prefix for constructing avatar URLs as : `${AVATAR_URL_PREFIX}/avatar/${MAIL_HASH}?${PARAMS}`. The following services are known to work :

**Gravatar (default), as per <https://gravatar.com/>** AVATAR\_URL\_PREFIX = 'https://www.gravatar.com/'

**Libravatar, as per <https://www.libravatar.org/>** AVATAR\_URL\_PREFIX = 'https://www.libravatar.org/'

**Voir aussi :**

*Cache Avatar, ENABLE\_AVATARS, Avatars*

## 2.16.7 AUTH\_TOKEN\_VALID

Nouveau dans la version 2.14.

How long the authentication token and temporary password from password reset e-mails is valid for. Set in number of seconds, defaulting to 172800 (2 days).

## 2.16.8 AUTH\_PASSWORD\_DAYS

Nouveau dans la version 2.15.

How many days using the same password should be allowed.

---

**Note :** Password changes made prior to Weblate 2.15 will not be accounted for in this policy.

---

Defaults to 180 days.

## 2.16.9 AUTOFIX\_LIST

Liste des correctifs automatiques à appliquer lors de l'enregistrement d'une chaîne.

---

**Note :** Provide a fully-qualified path to the Python class that implementing the autofixer interface.

---

Corrections disponibles :

**`weblate.trans.autofixes.whitespace.SameBookendingWhitespace`** Matches whitespace at the start and end of the string to the source.

**`weblate.trans.autofixes.chars.ReplaceTrailingDotsWithEllipsis`** Remplace les 3 points (...) par des points de suspension (...) si la chaîne source y recourt.

**`weblate.trans.autofixes.chars.RemoveZeroSpace`** Removes zero-width space characters if the source does not contain any.

**`weblate.trans.autofixes.chars.RemoveControlChars`** Removes control characters if the source does not contain any.

**`weblate.trans.autofixes.html.BleachHTML`** Removes unsafe HTML markup from strings flagged as `safe-html` (see *HTML non sûr*).

You can select which ones to use :

```
AUTOFIX_LIST = (  
    "weblate.trans.autofixes.whitespace.SameBookendingWhitespace",  
    "weblate.trans.autofixes.chars.ReplaceTrailingDotsWithEllipsis",  
)
```

**Voir aussi :**

*Automatic fixups, Personnaliser les réparations automatiques*

## 2.16.10 BACKGROUND\_TASKS

Nouveau dans la version 4.5.2.

Defines how often lengthy maintenance tasks should be triggered for a component.

Right now this controls :

- *Traduction automatique* add-on
- *Contrôles de qualité et corrections* recalculation

Choix possibles :

- `monthly` (this is the default)
- `weekly`
- `daily`
- `never`

---

**Note :** Increasing the frequency is not recommended when Weblate contains thousands of components.

---

### 2.16.11 BASE\_DIR

Base directory where Weblate sources are located. Used to derive several other paths by default :

— *DATA\_DIR*

Default value : Top level directory of Weblate sources.

### 2.16.12 BASIC\_LANGUAGES

Nouveau dans la version 4.4.

List of languages to offer users for starting new translation. When not specified built-in list is used which includes all commonly used languages, but without country specific variants.

This only limits non privileged users to add unwanted languages. The project admins are still presented with full selection of languages defined in Weblate.

---

**Note :** This does not define new languages for Weblate, it only filters existing ones in the database.

---

**Exemple :**

```
BASIC_LANGUAGES = {"cs", "it", "ja", "en"}
```

**Voir aussi :**

*Définitions de langue*

### 2.16.13 BORG\_EXTRA\_ARGS

Nouveau dans la version 4.9.

You can pass additional arguments to **borg create** when built-in backups are triggered.

**Exemple :**

```
BORG_EXTRA_ARGS = ["--exclude", "vcs/"]
```

**Voir aussi :**

*Sauvegarder et déplacer Weblate, borg create*

### 2.16.14 CSP\_SCRIPT\_SRC, CSP\_IMG\_SRC, CSP\_CONNECT\_SRC, CSP\_STYLE\_SRC, CSP\_FONT\_SRC

Customize Content-Security-Policy header for Weblate. The header is automatically generated based on enabled integrations with third-party services (Matomo, Google Analytics, Sentry, ...).

All these default to empty list.

**Exemple :**

```
# Enable Cloudflare Javascript optimizations
CSP_SCRIPT_SRC = ["ajax.cloudflare.com"]
```

**Voir aussi :**

*Content security policy, Content Security Policy (CSP)*

### 2.16.15 CHECK\_LIST

Liste des vérifications de qualité à effectuer sur une traduction.

---

**Note :** Provide a fully-qualified path to the Python class implementing the check interface.

---

Adjust the list of checks to include ones relevant to you.

All built-in *Quality checks* are turned on by default, from where you can change these settings. By default they are commented out in *Configuration d'exemple* so that default values are used. New checks then carried out for each new Weblate version.

You can turn off all checks :

```
CHECK_LIST = ()
```

You can turn on only a few :

```
CHECK_LIST = (  
    "weblate.checks.chars.BeginNewlineCheck",  
    "weblate.checks.chars.EndNewlineCheck",  
    "weblate.checks.chars.MaxLengthCheck",  
)
```

---

**Note :** Changing this setting only affects newly changed translations, existing checks will still be stored in the database. To also apply changes to the stored translations, run *updatechecks*.

---

**Voir aussi :**

*Quality checks, Customizing behavior using flags*

### 2.16.16 COMMENT\_CLEANUP\_DAYS

Nouveau dans la version 3.6.

Delete comments after a given number of days. Defaults to `None`, meaning no deletion at all.

### 2.16.17 COMMIT\_PENDING\_HOURS

Nouveau dans la version 2.10.

Number of hours between committing pending changes by way of the background task.

**Voir aussi :**

*Configuration des composants, Âge des modifications à archiver, Running maintenance tasks, commit\_pending*

### 2.16.18 CONTACT\_FORM

Nouveau dans la version 4.6.

Configures how e-mail from the contact form is being sent. Choose a configuration that matches your mail server configuration.

**"reply-to"** The sender is used in as *Reply-To*, this is the default behaviour.

**"from"** The sender is used in as *From*. Your mail server needs to allow sending such e-mails.

### 2.16.19 DATA\_DIR

The folder Weblate stores all data in. It contains links to VCS repositories, a fulltext index and various configuration files for external tools.

The following subdirectories usually exist :

**home** Home directory used for invoking scripts.

**ssh** SSH keys and configuration.

**static** Default location for static Django files, specified by `STATIC_ROOT`. See *Serving static files*.

The Docker container uses a separate volume for this, see *Docker container volumes*.

**media** Default location for Django media files, specified by `MEDIA_ROOT`. Contains uploaded screenshots, see *Visual context for strings*.

**vcs** Dépôts de contrôle de version pour les traductions.

**backups** Daily backup data, please check *Données supprimées pour les sauvegardes* for details.

**celery** Celery scheduler data, see *Background tasks using Celery*.

**fonts** : User-uploaded fonts, see *Gestion des polices*.

**Note :** This directory has to be writable by Weblate. Running it as uWSGI means the `www-data` user should have write access to it.

The easiest way to achieve this is to make the user the owner of the directory :

```
sudo chown www-data:www-data -R $DATA_DIR
```

Defaults to `$BASE_DIR/data`.

**Voir aussi :**

*BASE\_DIR*, *Permissions du système de fichiers*, *Sauvegarder et déplacer Weblate*

### 2.16.20 DATABASE\_BACKUP

Nouveau dans la version 3.1.

Whether the database backups should be stored as plain text, compressed or skipped. The authorized values are :

- "plain"
- "compressed"
- "none"

**Voir aussi :**

*Sauvegarder et déplacer Weblate*

### 2.16.21 DEFAULT\_ACCESS\_CONTROL

Nouveau dans la version 3.3.

The default access control setting for new projects :

- 0 *Public*
- 1 *Protégé*
- 100 *Privé*
- 200 *Personnalisé*

Use *Custom* if you are managing ACL manually, which means not relying on the internal Weblate management.

**Voir aussi :**

*Contrôle d'accès au projet, Contrôle d'accès*

### 2.16.22 DEFAULT\_AUTO\_WATCH

Nouveau dans la version 4.5.

Configures whether *Automatically watch projects on contribution* should be turned on for new users. Defaults to `True`.

**Voir aussi :**

*Notifications*

### 2.16.23 DEFAULT\_RESTRICTED\_COMPONENT

Nouveau dans la version 4.1.

The default value for component restriction.

**Voir aussi :**

*Accès restreint, Portée des groupes*

### 2.16.24 DEFAULT\_ADD\_MESSAGE, DEFAULT\_ADDON\_MESSAGE, DE- FAULT\_COMMIT\_MESSAGE, DEFAULT\_DELETE\_MESSAGE, DE- FAULT\_MERGE\_MESSAGE

Default commit messages for different operations, please check *Configuration des composants* for details.

**Voir aussi :**

*Balisateur de modèle, Configuration des composants, Commit, add, delete, merge and add-on messages*

### 2.16.25 DEFAULT\_ADDONS

Default add-ons to install on every created component.

---

**Note :** This setting affects only newly created components.

---

Exemple :



```
DEFAULT_ADDONS = {
    # Add-on with no parameters
    "weblate.flags.target_edit": {},
    # Add-on with parameters
    "weblate.autotranslate.autotranslate": {
        "mode": "suggest",
        "filter_type": "todo",
        "auto_source": "mt",
        "component": "",
        "engines": ["weblate-translation-memory"],
        "threshold": "80",
    },
}
```

**Voir aussi :**

*install\_addon*, *Modules*, *WEBLATE\_ADDONS*

## 2.16.26 DEFAULT\_COMMITER\_EMAIL

Nouveau dans la version 2.4.

Committer e-mail address defaulting to `noreply@weblate.org`.

**Voir aussi :**

*DEFAULT\_COMMITER\_NAME*

## 2.16.27 DEFAULT\_COMMITER\_NAME

Nouveau dans la version 2.4.

Le nom de l'auteur par défaut est `Weblate`.

**Voir aussi :**

*DEFAULT\_COMMITER\_EMAIL*

## 2.16.28 DEFAULT\_LANGUAGE

Nouveau dans la version 4.3.2.

Default source language to use for example in *Langue source*.

Defaults to *en*. The matching language object needs to exist in the database.

**Voir aussi :**

*Définitions de langue*, *Langue source*

### 2.16.29 DEFAULT\_MERGE\_STYLE

Nouveau dans la version 3.4.

Merge style for any new components.

- *rebase* - default
- *merge*

**Voir aussi :**

*Configuration des composants, Style de fusion*

### 2.16.30 DEFAULT\_SHARED\_TM

Nouveau dans la version 3.2.

Configures default value of *Utiliser un mémoire de traduction partagé* and *Contribue au mémoire de traduction partagé*.

### 2.16.31 DEFAULT\_TRANSLATION\_PROPAGATION

Nouveau dans la version 2.5.

Default setting for translation propagation, defaults to `True`.

**Voir aussi :**

*Configuration des composants, Permettre la propagation de la traduction*

### 2.16.32 DEFAULT\_PULL\_MESSAGE

Configures the default title and message for pull requests.

### 2.16.33 ENABLE\_AVATARS

Whether to turn on Gravatar-based avatars for users. By default this is on.

Avatars are fetched and cached on the server, lowering the risk of leaking private info, speeding up the user experience.

**Voir aussi :**

*Cache Avatar, AVATAR\_URL\_PREFIX, Avatars*

### 2.16.34 ENABLE\_HOOKS

Whether to enable anonymous remote hooks.

**Voir aussi :**

*Déclencheurs de notification*

### 2.16.35 ENABLE\_HTTPS

Whether to send links to Weblate as HTTPS or HTTP. This setting affects sent e-mails and generated absolute URLs.

In the default configuration this is also used for several Django settings related to HTTPS - it enables secure cookies, toggles HSTS or enables redirection to HTTPS URL.

The HTTPS redirection might be problematic in some cases and you might hit issue with infinite redirection in case you are using a reverse proxy doing SSL termination which does not correctly pass protocol headers to Django. Please tweak your reverse proxy configuration to emit `X-Forwarded-Proto` or `Forwarded` headers or configure `SECURE_PROXY_SSL_HEADER` to let Django correctly detect the SSL status.

**Voir aussi :**

`SESSION_COOKIE_SECURE,`      `CSRF_COOKIE_SECURE,`      `SECURE_SSL_REDIRECT,`      `SECURE_PROXY_SSL_HEADER` *Set correct site domain*

### 2.16.36 ENABLE\_SHARING

Turn on/off the *Share* menu so users can share translation progress on social networks.

### 2.16.37 GET\_HELP\_URL

Nouveau dans la version 4.5.2.

URL where support for your Weblate instance can be found.

### 2.16.38 GITLAB\_CREDENTIALS

Nouveau dans la version 4.3.

List for credentials for GitLab servers.

---

**Indication :** Use this in case you want Weblate to interact with more of them, for single GitLab endpoint stick with `GITLAB_USERNAME` and `GITLAB_TOKEN`.

---

```
GITLAB_CREDENTIALS = {
    "gitlab.com": {
        "username": "weblate",
        "token": "your-api-token",
    },
    "gitlab.example.com": {
        "username": "weblate",
        "token": "another-api-token",
    },
}
```

### 2.16.39 GITLAB\_USERNAME

GitLab username used to send merge requests for translation updates.

**Voir aussi :**

*GITLAB\_CREDENTIALS*, *GitLab merge requests*

### 2.16.40 GITLAB\_TOKEN

Nouveau dans la version 4.3.

Jeton d'accès personnel GitLab utilisé pour effectuer des appels API pour les mises à jour de traduction.

**Voir aussi :**

*GITLAB\_CREDENTIALS*, *GitLab merge requests*, *GitLab : Personal access token*

### 2.16.41 GITHUB\_CREDENTIALS

Nouveau dans la version 4.3.

List for credentials for GitHub servers.

---

**Indication :** Use this in case you want Weblate to interact with more of them, for single GitHub endpoint stick with *GITHUB\_USERNAME* and *GITHUB\_TOKEN*.

---

```
GITHUB_CREDENTIALS = {
  "api.github.com": {
    "username": "weblate",
    "token": "your-api-token",
  },
  "github.example.com": {
    "username": "weblate",
    "token": "another-api-token",
  },
}
```

### 2.16.42 GITHUB\_USERNAME

GitHub username used to send pull requests for translation updates.

**Voir aussi :**

*GITHUB\_CREDENTIALS*, *GitHub pull requests*

### 2.16.43 GITHUB\_TOKEN

Nouveau dans la version 4.3.

GitHub personal access token used to make API calls to send pull requests for translation updates.

**Voir aussi :**

*GITHUB\_CREDENTIALS*, *GitHub pull requests*, *Creating a GitHub personal access token*

### 2.16.44 GOOGLE\_ANALYTICS\_ID

Google Analytics ID to turn on monitoring of Weblate using Google Analytics.

### 2.16.45 HIDE\_REPO\_CREDENTIALS

Hide repository credentials from the web interface. In case you have repository URL with user and password, Weblate will hide it when related info is shown to users.

For example instead of `https://user:password@git.example.com/repo.git` it will show just `https://git.example.com/repo.git`. It tries to clean up VCS error messages too in a similar manner.

---

**Note :** This is turned on by default.

---

### 2.16.46 HIDE\_VERSION

Nouveau dans la version 4.3.1.

Hides version information from unauthenticated users. This also makes all documentation links point to latest version instead of the documentation matching currently installed version.

Hiding version is recommended security practice in some corporations, but it doesn't prevent attacker to figure out version by probing the behavior.

---

**Note :** Cette fonction est désactivée par défaut.

---

### 2.16.47 IP\_BEHIND\_REVERSE\_PROXY

Nouveau dans la version 2.14.

Indicates whether Weblate is running behind a reverse proxy.

If set to `True`, Weblate gets IP address from a header defined by `IP_PROXY_HEADER`.

**Avertissement :** Ensure you are actually using a reverse proxy and that it sets this header, otherwise users will be able to fake the IP address.

---

**Note :** This is not on by default.

---

**Voir aussi :**

*Running behind reverse proxy, Limite de requêtes, IP\_PROXY\_HEADER, IP\_PROXY\_OFFSET*

## 2.16.48 IP\_PROXY\_HEADER

Nouveau dans la version 2.14.

Indicates which header Weblate should obtain the IP address from when `IP_BEHIND_REVERSE_PROXY` is turned on.

Defaults to `HTTP_X_FORWARDED_FOR`.

**Voir aussi :**

*Running behind reverse proxy, Limite de requêtes, SECURE\_PROXY\_SSL\_HEADER, IP\_BEHIND\_REVERSE\_PROXY, IP\_PROXY\_OFFSET*

## 2.16.49 IP\_PROXY\_OFFSET

Nouveau dans la version 2.14.

Indicates which part of `IP_PROXY_HEADER` is used as client IP address.

Depending on your setup, this header might consist of several IP addresses, (for example `X-Forwarded-For: a, b, client-ip`) and you can configure which address from the header is used as client IP address here.

**Avertissement :** Setting this affects the security of your installation, you should only configure it to use trusted proxies for determining IP address.

Defaults to 0.

**Voir aussi :**

*Running behind reverse proxy, Limite de requêtes, SECURE\_PROXY\_SSL\_HEADER, IP\_BEHIND\_REVERSE\_PROXY, IP\_PROXY\_HEADER*

## 2.16.50 LEGAL\_URL

Nouveau dans la version 3.5.

URL where your Weblate instance shows its legal documents.

---

**Indication :** Useful if you host your legal documents outside Weblate for embedding them inside Weblate, please check *Mentions légales* for details.

---

Exemple :

```
LEGAL_URL = "https://weblate.org/terms/"
```

**Voir aussi :**

*PRIVACY\_URL*

### 2.16.51 LICENSE\_EXTRA

Additional licenses to include in the license choices.

---

**Note :** Each license definition should be tuple of its short name, a long name and an URL.

---

Par exemple :

```
LICENSE_EXTRA = [
    (
        "AGPL-3.0",
        "GNU Affero General Public License v3.0",
        "https://www.gnu.org/licenses/agpl-3.0-standalone.html",
    ),
]
```

### 2.16.52 LICENSE\_FILTER

Modifié dans la version 4.3 : Setting this to blank value now disables license alert.

Filter list of licenses to show. This also disables the license alert when set to empty.

---

**Note :** This filter uses the short license names.

---

Par exemple :

```
LICENSE_FILTER = {"AGPL-3.0", "GPL-3.0-or-later"}
```

Following disables the license alert :

```
LICENSE_FILTER = set ()
```

**Voir aussi :**

alerts

### 2.16.53 LICENSE\_REQUIRED

Defines whether the license attribute in *Configuration des composants* is required.

---

**Note :** This is off by default.

---

### 2.16.54 LIMIT\_TRANSLATION\_LENGTH\_BY\_SOURCE\_LENGTH

Whether the length of a given translation should be limited. The restriction is the length of the source string \* 10 characters.

---

**Indication :** Set this to `False` to allow longer translations (up to 10.000 characters) irrespective of source string length.

---



---

**Note :** Defaults to `True`.

---

## 2.16.55 LOCALIZE\_CDN\_URL et LOCALIZE\_CDN\_PATH

These settings configure the *JavaScript localisation CDN* add-on. `LOCALIZE_CDN_URL` defines root URL where the localization CDN is available and `LOCALIZE_CDN_PATH` defines path where Weblate should store generated files which will be served at the `LOCALIZE_CDN_URL`.

---

**Indication :** On Hosted Weblate, this uses `https://weblate-cdn.com/`.

---

**Voir aussi :**

*JavaScript localisation CDN*

## 2.16.56 LOGIN\_REQUIRED\_URLS

A list of URLs you want to require logging into. (Besides the standard rules built into Weblate).

---

**Indication :** This allows you to password protect a whole installation using :

```
LOGIN_REQUIRED_URLS = (r"/(.*)$",)
REST_FRAMEWORK["DEFAULT_PERMISSION_CLASSES"] = [
    "rest_framework.permissions.IsAuthenticated"
]
```

---

**Indication :** Il est également souhaitable de verrouiller l'accès à l'API, comme le montre l'exemple ci-dessus.

---

**Voir aussi :**

*REQUIRE\_LOGIN*

## 2.16.57 LOGIN\_REQUIRED\_URLS\_EXCEPTIONS

List of exceptions for `LOGIN_REQUIRED_URLS`. If not specified, users are allowed to access the sign in page.

Some of exceptions you might want to include :

```
LOGIN_REQUIRED_URLS_EXCEPTIONS = (
    r"/accounts/(.*)$", # Required for sign in
    r"/static/(.*)$", # Required for development mode
    r"/widgets/(.*)$", # Allowing public access to widgets
    r"/data/(.*)$", # Allowing public access to data exports
    r"/hooks/(.*)$", # Allowing public access to notification hooks
    r"/api/(.*)$", # Allowing access to API
    r"/js/i18n/$", # JavaScript localization
)
```



## 2.16.58 MATOMO\_SITE\_ID

ID of a site in Matomo (formerly Piwik) you want to track.

---

**Note :** This integration does not support the Matomo Tag Manager.

---

**Voir aussi :**

*MATOMO\_URL*

## 2.16.59 MATOMO\_URL

Full URL (including trailing slash) of a Matomo (formerly Piwik) installation you want to use to track Weblate use. Please check <<https://matomo.org/>> for more details.

---

**Indication :** This integration does not support the Matomo Tag Manager.

---

Par exemple :

```
MATOMO_SITE_ID = 1
MATOMO_URL = "https://example.matomo.cloud/"
```

**Voir aussi :**

*MATOMO\_SITE\_ID*

## 2.16.60 MT\_SERVICES

Modifié dans la version 3.0 : The setting was renamed from MACHINE\_TRANSLATION\_SERVICES to MT\_SERVICES to be consistent with other machine translation settings.

List of enabled machine translation services to use.

---

**Note :** Many of the services need additional configuration like API keys, please check their documentation *Traduction automatisée* for more details.

---



---

**Indication :** When using Docker container, this configuration is automatically generated based on provided API keys, see *Machine translation settings*.

---

```
MT_SERVICES = (
    "weblate.machinery.apertium.ApertiumAPYTranslation",
    "weblate.machinery.deepl.DeepLTranslation",
    "weblate.machinery.glosbe.GlosbeTranslation",
    "weblate.machinery.google.GoogleTranslation",
    "weblate.machinery.libretranslate.LibreTranslateTranslation",
    "weblate.machinery.microsoft.MicrosoftCognitiveTranslation",
    "weblate.machinery.microsoftterminology.MicrosoftTerminologyService",
    "weblate.machinery.mymemory.MyMemoryTranslation",
    "weblate.machinery.tmserver.AmagamaTranslation",
    "weblate.machinery.tmserver.TMServerTranslation",
    "weblate.machinery.yandex.YandexTranslation",
    "weblate.machinery.weblatetm.WeblateTranslation",
    "weblate.machinery.saptranslationhub.SAPTranslationHub",
```

(suite sur la page suivante)

(suite de la page précédente)

```
"weblate.memory.machine.WeblateMemory",  
)
```

**Voir aussi :**

*Traduction automatisée, Suggestions automatiques*

### 2.16.61 MT\_APERTIUM\_APY

URL of the Apertium-APy server, <https://wiki.apertium.org/wiki/Apertium-apy>

**Voir aussi :**

*Apertium, Traduction automatisée, Suggestions automatiques*

### 2.16.62 MT\_AWS\_ACCESS\_KEY\_ID

Access key ID for Amazon Translate.

**Voir aussi :**

*AWS, Traduction automatisée, Suggestions automatiques*

### 2.16.63 MT\_AWS\_SECRET\_ACCESS\_KEY

API secret key for Amazon Translate.

**Voir aussi :**

*AWS, Traduction automatisée, Suggestions automatiques*

### 2.16.64 MT\_AWS\_REGION

Region name to use for Amazon Translate.

**Voir aussi :**

*AWS, Traduction automatisée, Suggestions automatiques*

### 2.16.65 MT\_Baidu\_ID

Client ID for the Baidu Zhiyun API, you can register at <https://api.fanyi.baidu.com/api/trans/product/index>

**Voir aussi :**

*Baidu API machine translation, Traduction automatisée, Suggestions automatiques*

### 2.16.66 MT\_Baidu\_SECRET

Client secret for the Baidu Zhiyun API, you can register at <https://api.fanyi.baidu.com/api/trans/product/index>

**Voir aussi :**

*Baidu API machine translation, Traduction automatisée, Suggestions automatiques*

### 2.16.67 MT\_DEEPL\_API\_URL

Modifié dans la version 4.7 : The full API URL is now configured to allow using the free plan. Before, it was only possible to configure the API version using `MT_DEEPL_API_VERSION`.

API URL to use with the DeepL service. At the time of writing, there is the v1 API as well as a free and a paid version of the v2 API.

**`https://api.deepl.com/v2/`** (default in Weblate) Is meant for API usage on the paid plan, and the subscription is usage-based.

**`https://api-free.deepl.com/v2/`** Is meant for API usage on the free plan, and the subscription is usage-based.

**`https://api.deepl.com/v1/`** Is meant for CAT tools and is usable with a per-user subscription.

Previously Weblate was classified as a CAT tool by DeepL, so it was supposed to use the v1 API, but now is supposed to use the v2 API. Therefore it defaults to v2, and you can change it to v1 in case you have an existing CAT subscription and want Weblate to use that.

The easiest way to find out which one to use is to open an URL like the following in your browser :

[https://api.deepl.com/v2/translate?text=Hello&target\\_lang=FR&auth\\_key=XXX](https://api.deepl.com/v2/translate?text=Hello&target_lang=FR&auth_key=XXX)

Replace the XXX with your `auth_key`. If you receive a JSON object which contains « Bonjour », you have the correct URL ; if not, try the other three.

**Voir aussi :**

*DeepL, Traduction automatisée, Suggestions automatiques*

### 2.16.68 MT\_DEEPL\_KEY

API key for the DeepL API, you can register at <https://www.deepl.com/pro.html>

**Voir aussi :**

*DeepL, Traduction automatisée, Suggestions automatiques*

### 2.16.69 MT\_LIBRETRANSLATE\_API\_URL

Nouveau dans la version 4.7.1.

API URL for the LibreTranslate instance to use.

**`https://libretranslate.com/`** (official public instance) Requires an API key to use outside of the website.

Mirrors are documented on the LibreTranslate GitHub repository, some of which can be used without authentication :

<https://github.com/LibreTranslate/LibreTranslate#user-content-mirrors>

**Voir aussi :**

*LibreTranslate, Traduction automatisée, Suggestions automatiques*

### 2.16.70 MT\_LIBRETRANSLATE\_KEY

Nouveau dans la version 4.7.1.

API key for the LibreTranslate instance specified in `MT_LIBRETRANSLATE_API_URL`.

**Voir aussi :**

*LibreTranslate, Traduction automatisée, Suggestions automatiques*

### 2.16.71 MT\_GOOGLE\_KEY

API key for Google Translate API v2, you can register at <https://cloud.google.com/translate/docs>

**Voir aussi :**

*Google Translate, Traduction automatisée, Suggestions automatiques*

### 2.16.72 MT\_GOOGLE\_CREDENTIALS

API v3 JSON credentials file obtained in the Google cloud console. Please provide a full OS path. Credentials are per service-account affiliated with certain project. Please check <https://cloud.google.com/docs/authentication/getting-started> for more details.

### 2.16.73 MT\_GOOGLE\_PROJECT

Google Cloud API v3 project id with activated translation service and billing activated. Please check <https://cloud.google.com/appengine/docs/standard/nodejs/building-app/creating-project> for more details

### 2.16.74 MT\_GOOGLE\_LOCATION

API v3 Google Cloud App Engine may be specific to a location. Change accordingly if the default `global` fallback does not work for you.

Please check <https://cloud.google.com/appengine/docs/locations> for more details

**Voir aussi :**

*Google Translate API V3 (Advanced)*

### 2.16.75 MT\_MICROSOFT\_BASE\_URL

Region base URL domain as defined in the « [Base URLs](#) » section.

Defaults to `api.cognitive.microsofttranslator.com` for Azure Global.

For Azure China, please use `api.translator.azure.cn`.

### 2.16.76 MT\_MICROSOFT\_COGNITIVE\_KEY

Client key for the Microsoft Cognitive Services Translator API.

**Voir aussi :**

*Microsoft Cognitive Services Translator, Traduction automatisée, Suggestions automatiques, Cognitive Services - Text Translation API, Microsoft Azure Portal*

### 2.16.77 MT\_MICROSOFT\_REGION

Region prefix as defined in the « [Authenticating with a Multi-service resource](#) » section.

### 2.16.78 MT\_MICROSOFT\_ENDPOINT\_URL

Region endpoint URL domain for access token as defined in the « [Authenticating with an access token](#) » section.

Defaults to `api.cognitive.microsoft.com` for Azure Global.

For Azure China, please use your endpoint from the Azure Portal.

### 2.16.79 MT\_MODERNMT\_KEY

Clé d'API pour le moteur de traduction automatique ModernMT.

**Voir aussi :**

*ModernMT MT\_MODERNMT\_URL*

### 2.16.80 MT\_MODERNMT\_URL

URL of ModernMT. It defaults to `https://api.modernmt.com/` for the cloud service.

**Voir aussi :**

*ModernMT MT\_MODERNMT\_KEY*

### 2.16.81 MT\_MYMEMORY\_EMAIL

MyMemory identification e-mail address. It permits 1000 requests per day.

**Voir aussi :**

*MyMemory, Traduction automatisée, Suggestions automatiques, MyMemory : API technical specifications*

### 2.16.82 MT\_MYMEMORY\_KEY

MyMemory access key for private translation memory, use it with `MT_MYMEMORY_USER`.

**Voir aussi :**

*MyMemory, Traduction automatisée, Suggestions automatiques, MyMemory : API key generator*

### 2.16.83 MT\_MYMEMORY\_USER

MyMemory user ID for private translation memory, use it with `MT_MYMEMORY_KEY`.

**Voir aussi :**

*MyMemory, Traduction automatisée, Suggestions automatiques, MyMemory : API key generator*

### 2.16.84 MT\_NETEASE\_KEY

App key for NetEase Sight API, you can register at <https://sight.youdao.com/>

**Voir aussi :**

*NetEase Sight API machine translation, Traduction automatisée, Suggestions automatiques*

### 2.16.85 MT\_NETEASE\_SECRET

App secret for the NetEase Sight API, you can register at <https://sight.youdao.com/>

**Voir aussi :**

*NetEase Sight API machine translation, Traduction automatisée, Suggestions automatiques*

### 2.16.86 MT\_TMSERVER

URL where tmserver is running.

**Voir aussi :**

*tmserver, Traduction automatisée, Suggestions automatiques, tmserver*

### 2.16.87 MT\_YANDEX\_KEY

API key for the Yandex Translate API, you can register at <https://yandex.com/dev/translate/>

**Voir aussi :**

*Yandex Translate, Traduction automatisée, Suggestions automatiques*

### 2.16.88 MT\_YOUDAO\_ID

Client ID for the Youdao Zhiyun API, you can register at <https://ai.youdao.com/product-fanyi-text.s>.

**Voir aussi :**

*Youdao Zhiyun API machine translation, Traduction automatisée, Suggestions automatiques*

### 2.16.89 MT\_YOUDAO\_SECRET

Client secret for the Youdao Zhiyun API, you can register at <https://ai.youdao.com/product-fanyi-text.s>.

**Voir aussi :**

*Youdao Zhiyun API machine translation, Traduction automatisée, Suggestions automatiques*

### 2.16.90 MT\_SAP\_BASE\_URL

API URL to the SAP Translation Hub service.

**Voir aussi :**

*SAP Translation Hub, Traduction automatisée, Suggestions automatiques*

### 2.16.91 MT\_SAP\_SANDBOX\_APIKEY

API key for sandbox API usage

**Voir aussi :**

*SAP Translation Hub, Traduction automatisée, Suggestions automatiques*

### 2.16.92 MT\_SAP\_USERNAME

Your SAP username

**Voir aussi :**

*SAP Translation Hub, Traduction automatisée, Suggestions automatiques*

### 2.16.93 MT\_SAP\_PASSWORD

Your SAP password

**Voir aussi :**

*SAP Translation Hub, Traduction automatisée, Suggestions automatiques*

### 2.16.94 MT\_SAP\_USE\_MT

Whether to also use machine translation services, in addition to the term database. Possible values : True or False

**Voir aussi :**

*SAP Translation Hub, Traduction automatisée, Suggestions automatiques*

### 2.16.95 NEARBY\_MESSAGES

How many strings to show around the currently translated string. This is just a default value, users can adjust this in *Profil utilisateur*.

### 2.16.96 DEFAULT\_PAGE\_LIMIT

Nouveau dans la version 4.7.

Default number of elements to display when pagination is active.

## 2.16.97 PAGURE\_CREDENTIALS

Nouveau dans la version 4.3.2.

List for credentials for Pagure servers.

---

**Indication :** Use this in case you want Weblate to interact with more of them, for single Pagure endpoint stick with `PAGURE_USERNAME` and `PAGURE_TOKEN`.

---

```
PAGURE_CREDENTIALS = {
    "pagure.io": {
        "username": "weblate",
        "token": "your-api-token",
    },
    "pagure.example.com": {
        "username": "weblate",
        "token": "another-api-token",
    },
}
```

## 2.16.98 PAGURE\_USERNAME

Nouveau dans la version 4.3.2.

Nom d'utilisateur Pagure utilisé pour envoyer des demandes de fusion pour les mises à jour de traduction.

**Voir aussi :**

`PAGURE_CREDENTIALS`, *Pagure merge requests*

## 2.16.99 PAGURE\_TOKEN

Nouveau dans la version 4.3.2.

Jeton d'accès personnel Pagure utilisé pour effectuer des appels API pour les mises à jour de traduction.

**Voir aussi :**

`PAGURE_CREDENTIALS`, *Pagure merge requests*, *Pagure API*

## 2.16.100 PRIVACY\_URL

Nouveau dans la version 4.8.1.

URL where your Weblate instance shows its privacy policy.

---

**Indication :** Useful if you host your legal documents outside Weblate for embedding them inside Weblate, please check *Mentions légales* for details.

---

Exemple :

```
PRIVACY_URL = "https://weblate.org/terms/"
```

**Voir aussi :**

`LEGAL_URL`



### 2.16.101 RATELIMIT\_ATTEMPTS

Nouveau dans la version 3.2.

Maximum number of authentication attempts before rate limiting is applied.

Defaults to 5.

**Voir aussi :**

*Limite de requêtes, RATELIMIT\_WINDOW, RATELIMIT\_LOCKOUT*

### 2.16.102 RATELIMIT\_WINDOW

Nouveau dans la version 3.2.

How long authentication is accepted after rate limiting applies.

An amount of seconds defaulting to 300 (5 minutes).

**Voir aussi :**

*Limite de requêtes, RATELIMIT\_ATTEMPTS, RATELIMIT\_LOCKOUT*

### 2.16.103 RATELIMIT\_LOCKOUT

Nouveau dans la version 3.2.

How long authentication is locked after rate limiting applies.

An amount of seconds defaulting to 600 (10 minutes).

**Voir aussi :**

*Limite de requêtes, RATELIMIT\_ATTEMPTS, RATELIMIT\_WINDOW*

### 2.16.104 REGISTRATION\_ALLOW\_BACKENDS

Nouveau dans la version 4.1.

List of authentication backends to allow registration from. This only limits new registrations, users can still authenticate and add authentication using all configured authentication backends.

It is recommended to keep `REGISTRATION_OPEN` enabled while limiting registration backends, otherwise users will be able to register, but Weblate will not show links to register in the user interface.

Exemple :

```
REGISTRATION_ALLOW_BACKENDS = ["azuread-oauth2", "azuread-tenant-oauth2"]
```

---

**Indication :** The backend names match names used in URL for authentication.

---

**Voir aussi :**

*REGISTRATION\_OPEN, Authentification*

### 2.16.105 REGISTRATION\_CAPTCHA

A value of either `True` or `False` indicating whether registration of new accounts is protected by CAPTCHA. This setting is optional, and a default of `True` will be assumed if it is not supplied.

If turned on, a CAPTCHA is added to all pages where a users enters their e-mail address :

- New account registration.
- Récupération du mot de passe.
- Adding e-mail to an account.
- Contact form for users that are not signed in.

### 2.16.106 REGISTRATION\_EMAIL\_MATCH

Nouveau dans la version 2.17.

Allows you to filter which e-mail addresses can register.

Defaults to `.*`, which allows any e-mail address to be registered.

You can use it to restrict registration to a single e-mail domain :

```
REGISTRATION_EMAIL_MATCH = r"^.*@weblate\.org$"
```

### 2.16.107 REGISTRATION\_OPEN

Whether registration of new accounts is currently permitted. This optional setting can remain the default `True`, or changed to `False`.

This setting affects built-in authentication by e-mail address or through the Python Social Auth (you can whitelist certain back-ends using `REGISTRATION_ALLOW_BACKENDS`).

---

**Note :** If using third-party authentication methods such as *S'authentifier avec LDAP*, it just hides the registration form, but new users might still be able to sign in and create accounts.

---

**Voir aussi :**

`REGISTRATION_ALLOW_BACKENDS`, `REGISTRATION_EMAIL_MATCH`, *Authentification*

### 2.16.108 REPOSITORY\_ALERT\_THRESHOLD

Nouveau dans la version 4.0.2.

Threshold for triggering an alert for outdated repositories, or ones that contain too many changes. Defaults to 25.

**Voir aussi :**

alerts

### 2.16.109 REQUIRE\_LOGIN

Nouveau dans la version 4.1.

This enables `LOGIN_REQUIRED_URLS` and configures REST framework to require authentication for all API endpoints.

---

**Note :** This is implemented in the *Configuration d'exemple*. For Docker, use `WEBLATE_REQUIRE_LOGIN`.

---

### 2.16.110 SENTRY\_DSN

Nouveau dans la version 3.9.

Sentry DSN to use for *Collecting error reports*.

**Voir aussi :**

[Django integration for Sentry](#)

### 2.16.111 SESSION\_COOKIE\_AGE\_AUTHENTICATED

Nouveau dans la version 4.3.

Set session expiry for authenticated users. This complements `SESSION_COOKIE_AGE` which is used for unauthenticated users.

**Voir aussi :**

`SESSION_COOKIE_AGE`

### 2.16.112 SIMPLIFY\_LANGUAGES

Use simple language codes for default language/country combinations. For example an `fr_FR` translation will use the `fr` language code. This is usually the desired behavior, as it simplifies listing languages for these default combinations.

Turn this off if you want to different translations for each variant.

### 2.16.113 SITE\_DOMAIN

Configures site domain. This is necessary to produce correct absolute links in many scopes (for example activation e-mails, notifications or RSS feeds).

In case Weblate is running on non-standard port, include it here as well.

**Exemples :**

```
# Production site with domain name
SITE_DOMAIN = "weblate.example.com"

# Local development with IP address and port
SITE_DOMAIN = "127.0.0.1:8000"
```

---

**Note :** This setting should only contain the domain name. For configuring protocol, (enabling and enforcing HTTPS) use `ENABLE_HTTPS` and for changing URL, use `URL_PREFIX`.

---

---

**Indication :** On a Docker container, the site domain is configured through `WEBLATE_ALLOWED_HOSTS`.

---

**Voir aussi :**

*Set correct site domain, Allowed hosts setup, Correctly configure HTTPS* `WEBLATE_SITE_DOMAIN`, `ENABLE_HTTPS`

### 2.16.114 SITE\_TITLE

Site title to be used for the website and sent e-mails.

### 2.16.115 SPECIAL\_CHARS

Additional characters to include in the visual keyboard, *Clavier visuel*.

The default value is :

```
SPECIAL_CHARS = ("\t", "\n", "\u00a0", "...")
```

### 2.16.116 SINGLE\_PROJECT

Nouveau dans la version 3.8.

Redirects users directly to a project or component instead of showing the dashboard. You can either set it to `True` and in this case it only works in case there is actually only single project in Weblate. Alternatively set the project slug, and it will redirect unconditionally to this project.

Modifié dans la version 3.11 : The setting now also accepts a project slug, to force displaying that single project.

Exemple :

```
SINGLE_PROJECT = "test"
```

### 2.16.117 SSH\_EXTRA\_ARGS

Nouveau dans la version 4.9.

Allows to add custom parameters when Weblate is invoking SSH. This is useful when connecting to servers using legacy encryption or other non-standard features.

For example when SSH connection in Weblate fails with *Unable to negotiate with legacyhost : no matching key exchange method found. Their offer : diffie-hellman-group1-sha1*, you can enable that using :

```
SSH_EXTRA_ARGS = "-oKexAlgorithms=+diffie-hellman-group1-sha1"
```

---

**Indication :** The string is evaluated by shell, so make sure to quote any whitespace and special characters.

---

**Voir aussi :**

OpenSSH Legacy Options

### 2.16.118 STATUS\_URL

The URL where your Weblate instance reports its status.

### 2.16.119 SUGGESTION\_CLEANUP\_DAYS

Nouveau dans la version 3.2.1.

Automatically deletes suggestions after a given number of days. Defaults to `None`, meaning no deletions.

### 2.16.120 UPDATE\_LANGUAGES

Nouveau dans la version 4.3.2.

Controls whether languages database should be updated when running database migration and is enabled by default. This setting has no effect on invocation of `setuplang`.

**Voir aussi :**

*Définitions de langue intégrées*

### 2.16.121 URL\_PREFIX

This setting allows you to run Weblate under some path (otherwise it relies on being run from the webserver root).

---

**Note :** To use this setting, you also need to configure your server to strip this prefix. For example with WSGI, this can be achieved by setting `WSGIScriptAlias`.

---

---

**Indication :** The prefix should start with a `/`.

---

Exemple :

```
URL_PREFIX = "/translations"
```

---

**Note :** This setting does not work with Django's built-in server, you would have to adjust `urls.py` to contain this prefix.

---

### 2.16.122 VCS\_BACKENDS

Configuration of available VCS backends.

---

**Note :** Weblate tries to use all supported back-ends you have the tools for.

---

---

**Indication :** You can limit choices or add custom VCS back-ends by using this.

---

```
VCS_BACKENDS = ("weblate.vcs.git.GitRepository",)
```

**Voir aussi :**

*Intégration avec le système de contrôle de versions*

### 2.16.123 VCS\_CLONE\_DEPTH

Nouveau dans la version 3.10.2.

Configures how deep cloning of repositories Weblate should do.

---

**Note :** Currently this is only supported in [Git](#). By default Weblate does shallow clones of the repositories to make cloning faster and save disk space. Depending on your usage (for example when using custom [Modules](#)), you might want to increase the depth or turn off shallow clones completely by setting this to 0.

---

---

**Indication :** In case you get fatal: protocol error: expected old/new/ref, got 'shallow <commit hash>' error when pushing from Weblate, turn off shallow clones completely by setting :

---

```
VCS_CLONE_DEPTH = 0
```

### 2.16.124 WEBLATE\_ADDONS

List of add-ons available for use. To use them, they have to be enabled for a given translation component. By default this includes all built-in add-ons, when extending the list you will probably want to keep existing ones enabled, for example :

```
WEBLATE_ADDONS = (  
    # Built-in add-ons  
    "weblate.addons.gettext.GenerateMoAddon",  
    "weblate.addons.gettext.UpdateLinguasAddon",  
    "weblate.addons.gettext.UpdateConfigureAddon",  
    "weblate.addons.gettext.MsgmergeAddon",  
    "weblate.addons.gettext.GettextCustomizeAddon",  
    "weblate.addons.gettext.GettextAuthorComments",  
    "weblate.addons.cleanup.CleanupAddon",  
    "weblate.addons.consistency.LanguageConsistencyAddon",  
    "weblate.addons.discovery.DiscoveryAddon",  
    "weblate.addons.flags.SourceEditAddon",  
    "weblate.addons.flags.TargetEditAddon",  
    "weblate.addons.flags.SameEditAddon",  
    "weblate.addons.flags.BulkEditAddon",  
    "weblate.addons.generate.GenerateFileAddon",  
    "weblate.addons.json.JSONCustomizeAddon",  
    "weblate.addons.properties.PropertiesSortAddon",  
    "weblate.addons.git.GitSquashAddon",  
    "weblate.addons.removal.RemoveComments",  
    "weblate.addons.removal.RemoveSuggestions",  
    "weblate.addons.resx.ResxUpdateAddon",  
    "weblate.addons.autotranslate.AutoTranslateAddon",  
    "weblate.addons.yaml.YAMLCustomizeAddon",  
    "weblate.addons.cdn.CDNJSAddon",  
    # Add-on you want to include  
    "weblate.addons.example.ExampleAddon",  
)
```

---

**Note :** Removing the add-on from the list does not uninstall it from the components. Weblate will crash in that case. Please uninstall add-on from all components prior to removing it from this list.

---

**Voir aussi :**

[Modules](#), [DEFAULT\\_ADDONS](#)

### 2.16.125 WEBLATE\_EXPORTERS

Nouveau dans la version 4.2.

List of a available exporters offering downloading translations or glossaries in various file formats.

**Voir aussi :**

*Formats de fichiers pris en charge*

### 2.16.126 WEBLATE\_FORMATS

Nouveau dans la version 3.0.

List of file formats available for use.

---

**Note :** The default list already has the common formats.

---

**Voir aussi :**

*Formats de fichiers pris en charge*

### 2.16.127 WEBLATE\_GPG\_IDENTITY

Nouveau dans la version 3.1.

Identity used by Weblate to sign Git commits, for example :

```
WEBLATE_GPG_IDENTITY = "Weblate <weblate@example.com>"
```

The Weblate GPG keyring is searched for a matching key (home/ .gnupg under `DATA_DIR`). If not found, a key is generated, please check *Signing Git commits with GnuPG* for more details.

**Voir aussi :**

*Signing Git commits with GnuPG*

### 2.16.128 WEBSITE\_REQUIRED

Defines whether *Site Web du projet* has to be specified when creating a project. Turned on by default as that suits public server setups.

## 2.17 Configuration d'exemple

The following example is shipped as `weblate/settings_example.py` with Weblate :

```
#
# Copyright © 2012–2022 Michal Čihař <michal@cihar.com>
#
# This file is part of Weblate <https://weblate.org/>
#
# This program is free software: you can redistribute it and/or modify
# it under the terms of the GNU General Public License as published by
# the Free Software Foundation, either version 3 of the License, or
# (at your option) any later version.
#
# This program is distributed in the hope that it will be useful,
```

(suite sur la page suivante)

(suite de la page précédente)

```

# but WITHOUT ANY WARRANTY; without even the implied warranty of
# MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
# GNU General Public License for more details.
#
# You should have received a copy of the GNU General Public License
# along with this program. If not, see <https://www.gnu.org/licenses/>.
#

import os
import platform
from logging.handlers import SysLogHandler

# Title of site to use
SITE_TITLE = "Weblate"

# Site domain
SITE_DOMAIN = ""

# Whether site uses https
ENABLE_HTTPS = False

#
# Django settings for Weblate project.
#

DEBUG = True

ADMINS = (
    # ("Your Name", "your_email@example.com"),
)

MANAGERS = ADMINS

DATABASES = {
    "default": {
        # Use "postgresql" or "mysql".
        "ENGINE": "django.db.backends.postgresql",
        # Database name.
        "NAME": "weblate",
        # Database user.
        "USER": "weblate",
        # Name of role to alter to set parameters in PostgreSQL,
        # use in case role name is different than user used for authentication.
        # "ALTER_ROLE": "weblate",
        # Database password.
        "PASSWORD": "",
        # Set to empty string for localhost.
        "HOST": "127.0.0.1",
        # Set to empty string for default.
        "PORT": "",
        # Customizations for databases.
        "OPTIONS": {
            # In case of using an older MySQL server,
            # which has MyISAM as a default storage
            # "init_command": "SET storage_engine=INNODB",
            # Uncomment for MySQL older than 5.7:
            # "init_command": "SET sql_mode='STRICT_TRANS_TABLES'",
            # Set emoji capable charset for MySQL:
            # "charset": "utf8mb4",
            # Change connection timeout in case you get MySQL gone away error:

```

(suite sur la page suivante)



(suite de la page précédente)

```

        # "connect_timeout": 28800,
    },
    # Persistent connections
    "CONN_MAX_AGE": 0,
    # Disable server-side cursors, might be needed with pgbouncer
    "DISABLE_SERVER_SIDE_CURSORS": False,
}
}

BASE_DIR = os.path.dirname(os.path.dirname(os.path.abspath(__file__)))

# Data directory
DATA_DIR = os.path.join(BASE_DIR, "data")

# Local time zone for this installation. Choices can be found here:
# http://en.wikipedia.org/wiki/List_of_tz_zones_by_name
# although not all choices may be available on all operating systems.
# In a Windows environment this must be set to your system time zone.
TIME_ZONE = "UTC"

# Language code for this installation. All choices can be found here:
# http://www.i18nguy.com/unicode/language-identifiers.html
LANGUAGE_CODE = "en-us"

LANGUAGES = (
    ("ar", "العربية"),
    ("az", "Azərbaycan"),
    ("be", "Беларуская"),
    ("be@latin", "Biełaruskaja"),
    ("bg", "Български"),
    ("br", "Brezhoneg"),
    ("ca", "Català"),
    ("cs", "Čeština"),
    ("da", "Dansk"),
    ("de", "Deutsch"),
    ("en", "English"),
    ("el", "Ελληνικά"),
    ("en-gb", "English (United Kingdom)"),
    ("es", "Español"),
    ("fi", "Suomi"),
    ("fr", "Français"),
    ("gl", "Galego"),
    ("he", "עברית"),
    ("hu", "Magyar"),
    ("hr", "Hrvatski"),
    ("id", "Indonesia"),
    ("is", "Íslenska"),
    ("it", "Italiano"),
    ("ja", "日本語"),
    ("kab", "Taqbaylit"),
    ("kk", "Қазақ тілі"),
    ("ko", "한국어"),
    ("nb", "Norsk bokmål"),
    ("nl", "Nederlands"),
    ("pl", "Polski"),
    ("pt", "Português"),
    ("pt-br", "Português brasileiro"),
    ("ro", "Română"),
    ("ru", "Русский"),
    ("sk", "Slovenčina"),
    ("sl", "Slovenščina"),

```

(suite sur la page suivante)

(suite de la page précédente)

```

    ("sq", "Shqip"),
    ("sr", "Српски"),
    ("sr-latn", "Srpski"),
    ("sv", "Svenska"),
    ("th", "ไทย"),
    ("tr", "Türkçe"),
    ("uk", "Українська"),
    ("zh-hans", "中文"),
    ("zh-hant", "中文")
)

SITE_ID = 1

# If you set this to False, Django will make some optimizations so as not
# to load the internationalization machinery.
USE_I18N = True

# If you set this to False, Django will not format dates, numbers and
# calendars according to the current locale.
USE_L10N = True

# If you set this to False, Django will not use timezone-aware datetimes.
USE_TZ = True

# Type of automatic primary key, introduced in Django 3.2
DEFAULT_AUTO_FIELD = "django.db.models.AutoField"

# URL prefix to use, please see documentation for more details
URL_PREFIX = ""

# Absolute filesystem path to the directory that will hold user-uploaded files.
MEDIA_ROOT = os.path.join(DATA_DIR, "media")

# URL that handles the media served from MEDIA_ROOT. Make sure to use a
# trailing slash.
MEDIA_URL = f"{URL_PREFIX}/media/"

# Absolute path to the directory static files should be collected to.
# Don't put anything in this directory yourself; store your static files
# in apps' "static/" subdirectories and in STATICFILES_DIRS.
STATIC_ROOT = os.path.join(DATA_DIR, "static")

# URL prefix for static files.
STATIC_URL = f"{URL_PREFIX}/static/"

# Additional locations of static files
STATICFILES_DIRS = (
    # Put strings here, like "/home/html/static" or "C:/www/django/static".
    # Always use forward slashes, even on Windows.
    # Don't forget to use absolute paths, not relative paths.
)

# List of finder classes that know how to find static files in
# various locations.
STATICFILES_FINDERS = (
    "django.contrib.staticfiles.finders.FileSystemFinder",
    "django.contrib.staticfiles.finders.AppDirectoriesFinder",
    "compressor.finders.CompressorFinder",
)

# Make this unique, and don't share it with anybody.

```

(suite sur la page suivante)

(suite de la page précédente)

```

# You can generate it using weblate/examples/generate-secret-key
SECRET_KEY = ""

TEMPLATES = [
    {
        "BACKEND": "django.template.backends.django.DjangoTemplates",
        "OPTIONS": {
            "context_processors": [
                "django.contrib.auth.context_processors.auth",
                "django.template.context_processors.debug",
                "django.template.context_processors.i18n",
                "django.template.context_processors.request",
                "django.template.context_processors.csrf",
                "django.contrib.messages.context_processors.messages",
                "weblate.trans.context_processors.weblate_context",
            ],
        },
        "APP_DIRS": True,
    }
]

# GitHub username and token for sending pull requests.
# Please see the documentation for more details.
GITHUB_USERNAME = None
GITHUB_TOKEN = None

# GitLab username and token for sending merge requests.
# Please see the documentation for more details.
GITLAB_USERNAME = None
GITLAB_TOKEN = None

# Authentication configuration
AUTHENTICATION_BACKENDS = (
    "social_core.backends.email.EmailAuth",
    # "social_core.backends.google.GoogleOAuth2",
    # "social_core.backends.github.GithubOAuth2",
    # "social_core.backends.bitbucket.BitbucketOAuth",
    # "social_core.backends.suse.OpenSUSEOpenId",
    # "social_core.backends.ubuntu.UbuntuOpenId",
    # "social_core.backends.fedora.FedoraOpenId",
    # "social_core.backends.facebook.FacebookOAuth2",
    "weblate.accounts.auth.WeblateUserBackend",
)

# Custom user model
AUTH_USER_MODEL = "weblate_auth.User"

# Social auth backends setup
SOCIAL_AUTH_GITHUB_KEY = ""
SOCIAL_AUTH_GITHUB_SECRET = ""
SOCIAL_AUTH_GITHUB_SCOPE = ["user:email"]

SOCIAL_AUTH_GITHUB_ORG_KEY = ""
SOCIAL_AUTH_GITHUB_ORG_SECRET = ""
SOCIAL_AUTH_GITHUB_ORG_NAME = ""

SOCIAL_AUTH_GITHUB_TEAM_KEY = ""
SOCIAL_AUTH_GITHUB_TEAM_SECRET = ""
SOCIAL_AUTH_GITHUB_TEAM_ID = ""

```

(suite sur la page suivante)

(suite de la page précédente)

```

SOCIAL_AUTH_BITBUCKET_KEY = ""
SOCIAL_AUTH_BITBUCKET_SECRET = ""
SOCIAL_AUTH_BITBUCKET_VERIFIED_EMAILS_ONLY = True

SOCIAL_AUTH_FACEBOOK_KEY = ""
SOCIAL_AUTH_FACEBOOK_SECRET = ""
SOCIAL_AUTH_FACEBOOK_SCOPE = ["email", "public_profile"]
SOCIAL_AUTH_FACEBOOK_PROFILE_EXTRA_PARAMS = {"fields": "id,name,email"}

SOCIAL_AUTH_GOOGLE_OAUTH2_KEY = ""
SOCIAL_AUTH_GOOGLE_OAUTH2_SECRET = ""

# Social auth settings
SOCIAL_AUTH_PIPELINE = (
    "social_core.pipeline.social_auth.social_details",
    "social_core.pipeline.social_auth.social_uid",
    "social_core.pipeline.social_auth.auth_allowed",
    "social_core.pipeline.social_auth.social_user",
    "weblate.accounts.pipeline.store_params",
    "weblate.accounts.pipeline.verify_open",
    "social_core.pipeline.user.get_username",
    "weblate.accounts.pipeline.require_email",
    "social_core.pipeline.mail.mail_validation",
    "weblate.accounts.pipeline.revoke_mail_code",
    "weblate.accounts.pipeline.ensure_valid",
    "weblate.accounts.pipeline.remove_account",
    "social_core.pipeline.social_auth.associate_by_email",
    "weblate.accounts.pipeline.reauthenticate",
    "weblate.accounts.pipeline.verify_username",
    "social_core.pipeline.user.create_user",
    "social_core.pipeline.social_auth.associate_user",
    "social_core.pipeline.social_auth.load_extra_data",
    "weblate.accounts.pipeline.cleanup_next",
    "weblate.accounts.pipeline.user_full_name",
    "weblate.accounts.pipeline.store_email",
    "weblate.accounts.pipeline.notify_connect",
    "weblate.accounts.pipeline.password_reset",
)
SOCIAL_AUTH_DISCONNECT_PIPELINE = (
    "social_core.pipeline.disconnect.allowed_to_disconnect",
    "social_core.pipeline.disconnect.get_entries",
    "social_core.pipeline.disconnect.revoke_tokens",
    "weblate.accounts.pipeline.cycle_session",
    "weblate.accounts.pipeline.adjust_primary_mail",
    "weblate.accounts.pipeline.notify_disconnect",
    "social_core.pipeline.disconnect.disconnect",
    "weblate.accounts.pipeline.cleanup_next",
)

# Custom authentication strategy
SOCIAL_AUTH_STRATEGY = "weblate.accounts.strategy.WeblateStrategy"

# Raise exceptions so that we can handle them later
SOCIAL_AUTH_RAISE_EXCEPTIONS = True

SOCIAL_AUTH_EMAIL_VALIDATION_FUNCTION = "weblate.accounts.pipeline.send_validation"
SOCIAL_AUTH_EMAIL_VALIDATION_URL = f"{URL_PREFIX}/accounts/email-sent/"
SOCIAL_AUTH_LOGIN_ERROR_URL = f"{URL_PREFIX}/accounts/login/"
SOCIAL_AUTH_EMAIL_FORM_URL = f"{URL_PREFIX}/accounts/email/"
SOCIAL_AUTH_NEW_ASSOCIATION_REDIRECT_URL = f"{URL_PREFIX}/accounts/profile/#account
↪ "

```

(suite sur la page suivante)

(suite de la page précédente)

```

SOCIAL_AUTH_PROTECTED_USER_FIELDS = ("email",)
SOCIAL_AUTH_SLUGIFY_USERNAMES = True
SOCIAL_AUTH_SLUGIFY_FUNCTION = "weblate.accounts.pipeline.slugify_username"

# Password validation configuration
AUTH_PASSWORD_VALIDATORS = [
    {
        "NAME": "django.contrib.auth.password_validation.
↪UserAttributeSimilarityValidator" # noqa: E501, pylint: disable=line-too-long
    },
    {
        "NAME": "django.contrib.auth.password_validation.MinimumLengthValidator",
        "OPTIONS": {"min_length": 10},
    },
    {"NAME": "django.contrib.auth.password_validation.CommonPasswordValidator"},
    {"NAME": "django.contrib.auth.password_validation.NumericPasswordValidator"},
    {"NAME": "weblate.accounts.password_validation.CharsPasswordValidator"},
    {"NAME": "weblate.accounts.password_validation.PastPasswordsValidator"},
    # Optional password strength validation by django-zxcvbn-password
    # {
    #     "NAME": "zxcvbn_password.ZXCVBNValidator",
    #     "OPTIONS": {
    #         "min_score": 3,
    #         "user_attributes": ("username", "email", "full_name")
    #     }
    # },
]

# Password hashing (prefer Argon)
PASSWORD_HASHERS = [
    "django.contrib.auth.hashers.Argon2PasswordHasher",
    "django.contrib.auth.hashers.PBKDF2PasswordHasher",
    "django.contrib.auth.hashers.PBKDF2SHA1PasswordHasher",
    "django.contrib.auth.hashers.BCryptSHA256PasswordHasher",
]

# Allow new user registrations
REGISTRATION_OPEN = True

# Shortcut for login required setting
REQUIRE_LOGIN = False

# Middleware
MIDDLEWARE = [
    "weblate.middleware.RedirectMiddleware",
    "weblate.middleware.ProxyMiddleware",
    "django.middleware.security.SecurityMiddleware",
    "django.contrib.sessions.middleware.SessionMiddleware",
    "django.middleware.csrf.CsrfViewMiddleware",
    "weblate.accounts.middleware.AuthenticationMiddleware",
    "django.contrib.messages.middleware.MessageMiddleware",
    "django.middleware.clickjacking.XFrameOptionsMiddleware",
    "social_django.middleware.SocialAuthExceptionMiddleware",
    "weblate.accounts.middleware.RequireLoginMiddleware",
    "weblate.api.middleware.ThrottlingMiddleware",
    "weblate.middleware.SecurityMiddleware",
    "weblate.wladmin.middleware.ManageMiddleware",
]

ROOT_URLCONF = "weblate.urls"

```

(suite sur la page suivante)

(suite de la page précédente)

```

# Django and Weblate apps
INSTALLED_APPS = [
    # Weblate apps on top to override Django locales and templates
    "weblate.addons",
    "weblate.auth",
    "weblate.checks",
    "weblate.formats",
    "weblate.glossary",
    "weblate.machinery",
    "weblate.trans",
    "weblate.lang",
    "weblate_language_data",
    "weblate.memory",
    "weblate.screenshots",
    "weblate.fonts",
    "weblate.accounts",
    "weblate.configuration",
    "weblate.utils",
    "weblate.vcs",
    "weblate.wladmin",
    "weblate.metrics",
    "weblate",
    # Optional: Git exporter
    "weblate.gitexport",
    # Standard Django modules
    "django.contrib.auth",
    "django.contrib.contenttypes",
    "django.contrib.sessions",
    "django.contrib.messages",
    "django.contrib.staticfiles",
    "django.contrib.admin.apps.SimpleAdminConfig",
    "django.contrib.admindocs",
    "django.contrib.sitemaps",
    "django.contrib.humanize",
    # Third party Django modules
    "social_django",
    "crispy_forms",
    "compressor",
    "rest_framework",
    "rest_framework.authtoken",
    "django_filters",
]

# Custom exception reporter to include some details
DEFAULT_EXCEPTION_REPORTER_FILTER = "weblate.trans.debug.
↳ WeblateExceptionReporterFilter"

# Default logging of Weblate messages
# - to syslog in production (if available)
# - otherwise to console
# - you can also choose "logfile" to log into separate file
#   after configuring it below

# Detect if we can connect to syslog
HAVE_SYSLOG = False
if platform.system() != "Windows":
    try:
        handler = SysLogHandler(address="/dev/log", facility=SysLogHandler.LOG_
↳ LOCAL2)
        handler.close()
        HAVE_SYSLOG = True

```

(suite sur la page suivante)

(suite de la page précédente)

```

except OSError:
    HAVE_SYSLOG = False

if DEBUG or not HAVE_SYSLOG:
    DEFAULT_LOG = "console"
else:
    DEFAULT_LOG = "syslog"
DEFAULT_LOGLEVEL = "DEBUG" if DEBUG else "INFO"

# A sample logging configuration. The only tangible logging
# performed by this configuration is to send an email to
# the site admins on every HTTP 500 error when DEBUG=False.
# See http://docs.djangoproject.com/en/stable/topics/logging for
# more details on how to customize your logging configuration.
LOGGING = {
    "version": 1,
    "disable_existing_loggers": True,
    "filters": {"require_debug_false": {"()": "django.utils.log.RequireDebugFalse"}
    ↪},
    "formatters": {
        "syslog": {"format": "weblate[% (process)d]: %(levelname)s %(message)s"},
        "simple": {"format": "[% (asctime)s]: %(levelname)s/% (process)s %(message)s"
    ↪},
        "logfile": {"format": "[% (asctime)s %(levelname)s %(message)s"},
        "django.server": {
            "()": "django.utils.log.ServerFormatter",
            "format": "[% (server_time)s] %(message)s",
        },
    },
    "handlers": {
        "mail_admins": {
            "level": "ERROR",
            "filters": ["require_debug_false"],
            "class": "django.utils.log.AdminEmailHandler",
            "include_html": True,
        },
        "console": {
            "level": "DEBUG",
            "class": "logging.StreamHandler",
            "formatter": "simple",
        },
        "django.server": {
            "level": "INFO",
            "class": "logging.StreamHandler",
            "formatter": "django.server",
        },
        "syslog": {
            "level": "DEBUG",
            "class": "logging.handlers.SysLogHandler",
            "formatter": "syslog",
            "address": "/dev/log",
            "facility": SysLogHandler.LOG_LOCAL2,
        },
    },
    # Logging to a file
    # "logfile": {
    #     "level": "DEBUG",
    #     "class": "logging.handlers.RotatingFileHandler",
    #     "filename": "/var/log/weblate/weblate.log",
    #     "maxBytes": 100000,
    #     "backupCount": 3,
    #     "formatter": "logfile",

```

(suite sur la page suivante)

```

    # },
},
"loggers": {
    "django.request": {
        "handlers": ["mail_admins", DEFAULT_LOG],
        "level": "ERROR",
        "propagate": True,
    },
    "django.server": {
        "handlers": ["django.server"],
        "level": "INFO",
        "propagate": False,
    },
    # Logging database queries
    # "django.db.backends": {
    #     "handlers": [DEFAULT_LOG],
    #     "level": "DEBUG",
    # },
    "weblate": {"handlers": [DEFAULT_LOG], "level": DEFAULT_LOGLEVEL},
    # Logging VCS operations
    "weblate.vcs": {"handlers": [DEFAULT_LOG], "level": DEFAULT_LOGLEVEL},
    # Python Social Auth
    "social": {"handlers": [DEFAULT_LOG], "level": DEFAULT_LOGLEVEL},
    # Django Authentication Using LDAP
    "django_auth_ldap": {"handlers": [DEFAULT_LOG], "level": DEFAULT_LOGLEVEL},
    # SAML IdP
    "djangosaml2idp": {"handlers": [DEFAULT_LOG], "level": DEFAULT_LOGLEVEL},
},
}

# Remove syslog setup if it's not present
if not HAVE_SYSLOG:
    del LOGGING["handlers"]["syslog"]

# List of machine translations
MT_SERVICES = (
    # "weblate.machinery.apertium.ApertiumAPYTranslation",
    # "weblate.machinery.baidu.BaiduTranslation",
    # "weblate.machinery.deepl.DeepLTranslation",
    # "weblate.machinery.glosbe.GlosbeTranslation",
    # "weblate.machinery.google.GoogleTranslation",
    # "weblate.machinery.googlev3.GoogleV3Translation",
    # "weblate.machinery.libretranslate.LibreTranslateTranslation",
    # "weblate.machinery.microsoft.MicrosoftCognitiveTranslation",
    # "weblate.machinery.microsoftterminology.MicrosoftTerminologyService",
    # "weblate.machinery.modernmt.ModernMTTranslation",
    # "weblate.machinery.mymemory.MyMemoryTranslation",
    # "weblate.machinery.netease.NeteaseSightTranslation",
    # "weblate.machinery.tmservice.AmagamaTranslation",
    # "weblate.machinery.tmservice.TMServerTranslation",
    # "weblate.machinery.yandex.YandexTranslation",
    # "weblate.machinery.saptranslationhub.SAPTranslationHub",
    # "weblate.machinery.youdao.YoudaoTranslation",
    "weblate.machinery.weblatetm.WeblateTranslation",
    "weblate.memory.machine.WeblateMemory",
)

# Machine translation API keys

# URL of the Apertium APY server
MT_APERTIUM_APY = None

```



(suite de la page précédente)

```

# DeepL API key
MT_DEEPL_KEY = None

# LibreTranslate
MT_LIBRETRANSLATE_API_URL = None
MT_LIBRETRANSLATE_KEY = None

# Microsoft Cognitive Services Translator API, register at
# https://portal.azure.com/
MT_MICROSOFT_COGNITIVE_KEY = None
MT_MICROSOFT_REGION = None

# ModernMT
MT_MODERNMT_KEY = None

# MyMemory identification email, see
# https://mymemory.translated.net/doc/spec.php
MT_MYMEMORY_EMAIL = None

# Optional MyMemory credentials to access private translation memory
MT_MYMEMORY_USER = None
MT_MYMEMORY_KEY = None

# Google API key for Google Translate API v2
MT_GOOGLE_KEY = None

# Google Translate API3 credentials and project id
MT_GOOGLE_CREDENTIALS = None
MT_GOOGLE_PROJECT = None

# Baidu app key and secret
MT_Baidu_ID = None
MT_Baidu_SECRET = None

# Youdao Zhiyun app key and secret
MT_YOUDAO_ID = None
MT_YOUDAO_SECRET = None

# Netease Sight (Jianwai) app key and secret
MT_NETEASE_KEY = None
MT_NETEASE_SECRET = None

# API key for Yandex Translate API
MT_YANDEX_KEY = None

# tmserver URL
MT_TMSERVER = None

# SAP Translation Hub
MT_SAP_BASE_URL = None
MT_SAP_SANDBOX_APIKEY = None
MT_SAP_USERNAME = None
MT_SAP_PASSWORD = None
MT_SAP_USE_MT = True

# Use HTTPS when creating redirect URLs for social authentication, see
# documentation for more details:
# https://python-social-auth-docs.readthedocs.io/en/latest/configuration/settings.
# ↪html#processing-redirects-and-urlopen
SOCIAL_AUTH_REDIRECT_IS_HTTPS = ENABLE_HTTPS

```

(suite sur la page suivante)

```

# Make CSRF cookie HttpOnly, see documentation for more details:
# https://docs.djangoproject.com/en/1.11/ref/settings/#csrf-cookie-httponly
CSRF_COOKIE_HTTPONLY = True
CSRF_COOKIE_SECURE = ENABLE_HTTPS
# Store CSRF token in session
CSRF_USE_SESSIONS = True
# Customize CSRF failure view
CSRF_FAILURE_VIEW = "weblate.trans.views.error.csrf_failure"
SESSION_COOKIE_SECURE = ENABLE_HTTPS
SESSION_COOKIE_HTTPONLY = True
# SSL redirect
SECURE_SSL_REDIRECT = ENABLE_HTTPS
# Sent referrrrer only for same origin links
SECURE_REFERRER_POLICY = "same-origin"
# SSL redirect URL exemption list
SECURE_REDIRECT_EXEMPT = (r"healthz/$",) # Allowing HTTP access to health check
# Session cookie age (in seconds)
SESSION_COOKIE_AGE = 1000
SESSION_COOKIE_AGE_AUTHENTICATED = 1209600
SESSION_COOKIE_SAMESITE = "Lax"
# Increase allowed upload size
DATA_UPLOAD_MAX_MEMORY_SIZE = 50000000

# Apply session coookie settings to language cookie as ewll
LANGUAGE_COOKIE_SECURE = SESSION_COOKIE_SECURE
LANGUAGE_COOKIE_HTTPONLY = SESSION_COOKIE_HTTPONLY
LANGUAGE_COOKIE_AGE = SESSION_COOKIE_AGE_AUTHENTICATED * 10
LANGUAGE_COOKIE_SAMESITE = SESSION_COOKIE_SAMESITE

# Some security headers
SECURE_BROWSER_XSS_FILTER = True
X_FRAME_OPTIONS = "DENY"
SECURE_CONTENT_TYPE_NOSNIFF = True

# Optionally enable HSTS
SECURE_HSTS_SECONDS = 31536000 if ENABLE_HTTPS else 0
SECURE_HSTS_PRELOAD = ENABLE_HTTPS
SECURE_HSTS_INCLUDE_SUBDOMAINS = ENABLE_HTTPS

# HTTPS detection behind reverse proxy
SECURE_PROXY_SSL_HEADER = None

# URL of login
LOGIN_URL = f"{URL_PREFIX}/accounts/login/"

# URL of logout
LOGOUT_URL = f"{URL_PREFIX}/accounts/logout/"

# Default location for login
LOGIN_REDIRECT_URL = f"{URL_PREFIX}/"

# Anonymous user name
ANONYMOUS_USER_NAME = "anonymous"

# Reverse proxy settings
IP_PROXY_HEADER = "HTTP_X_FORWARDED_FOR"
IP_BEHIND_REVERSE_PROXY = False
IP_PROXY_OFFSET = 0

# Sending HTML in mails

```

(suite de la page précédente)

```

EMAIL_SEND_HTML = True

# Subject of emails includes site title
EMAIL_SUBJECT_PREFIX = f"[{SITE_TITLE}] "

# Enable remote hooks
ENABLE_HOOKS = True

# By default the length of a given translation is limited to the length of
# the source string * 10 characters. Set this option to False to allow longer
# translations (up to 10.000 characters)
LIMIT_TRANSLATION_LENGTH_BY_SOURCE_LENGTH = True

# Use simple language codes for default language/country combinations
SIMPLIFY_LANGUAGES = True

# Render forms using bootstrap
CRISPY_TEMPLATE_PACK = "bootstrap3"

# List of quality checks
# CHECK_LIST = (
#     "weblate.checks.same.SameCheck",
#     "weblate.checks.chars.BeginNewlineCheck",
#     "weblate.checks.chars.EndNewlineCheck",
#     "weblate.checks.chars.BeginSpaceCheck",
#     "weblate.checks.chars.EndSpaceCheck",
#     "weblate.checks.chars.DoubleSpaceCheck",
#     "weblate.checks.chars.EndStopCheck",
#     "weblate.checks.chars.EndColonCheck",
#     "weblate.checks.chars.EndQuestionCheck",
#     "weblate.checks.chars.EndExclamationCheck",
#     "weblate.checks.chars.EndEllipsisCheck",
#     "weblate.checks.chars.EndSemicolonCheck",
#     "weblate.checks.chars.MaxLengthCheck",
#     "weblate.checks.chars.KashidaCheck",
#     "weblate.checks.chars.PunctuationSpacingCheck",
#     "weblate.checks.format.PythonFormatCheck",
#     "weblate.checks.format.PythonBraceFormatCheck",
#     "weblate.checks.format.PHPFormatCheck",
#     "weblate.checks.format.CFormatCheck",
#     "weblate.checks.format.PperlFormatCheck",
#     "weblate.checks.format.JavaScriptFormatCheck",
#     "weblate.checks.format.LuaFormatCheck",
#     "weblate.checks.format.ObjectPascalFormatCheck",
#     "weblate.checks.format.SchemeFormatCheck",
#     "weblate.checks.format.CSharpFormatCheck",
#     "weblate.checks.format.JavaFormatCheck",
#     "weblate.checks.format.JavaMessageFormatCheck",
#     "weblate.checks.format.PercentPlaceholdersCheck",
#     "weblate.checks.format.VueFormattingCheck",
#     "weblate.checks.format.I18NextInterpolationCheck",
#     "weblate.checks.format.ESTemplateLiteralsCheck",
#     "weblate.checks.angularjs.AngularJSInterpolationCheck",
#     "weblate.checks.icu.ICUMessageFormatCheck",
#     "weblate.checks.icu.ICUSourceCheck",
#     "weblate.checks.qt.QtFormatCheck",
#     "weblate.checks.qt.QtPluralCheck",
#     "weblate.checks.ruby.RubyFormatCheck",
#     "weblate.checks.consistency.PluralsCheck",
#     "weblate.checks.consistency.SamePluralsCheck",
#     "weblate.checks.consistency.ConsistencyCheck",

```

(suite sur la page suivante)

(suite de la page précédente)

```

# "weblate.checks.consistency.TranslatedCheck",
# "weblate.checks.chars.EscapedNewlineCountingCheck",
# "weblate.checks.chars.NewLineCountCheck",
# "weblate.checks.markup.BBCodeCheck",
# "weblate.checks.chars.ZeroWidthSpaceCheck",
# "weblate.checks.render.MaxSizeCheck",
# "weblate.checks.markup.XMLValidityCheck",
# "weblate.checks.markup.XMLTagsCheck",
# "weblate.checks.markup.MarkdownRefLinkCheck",
# "weblate.checks.markup.MarkdownLinkCheck",
# "weblate.checks.markup.MarkdownSyntaxCheck",
# "weblate.checks.markup.URLCheck",
# "weblate.checks.markup.SafeHTMLCheck",
# "weblate.checks.placeholders.PlaceholderCheck",
# "weblate.checks.placeholders.RegexCheck",
# "weblate.checks.duplicate.DuplicateCheck",
# "weblate.checks.source.OptionalPluralCheck",
# "weblate.checks.source.EllipsisCheck",
# "weblate.checks.source.MultipleFailingCheck",
# "weblate.checks.source.LongUntranslatedCheck",
# "weblate.checks.format.MultipleUnnamedFormatsCheck",
# "weblate.checks.glossary.GlossaryCheck",
# )

# List of automatic fixups
# AUTOFIX_LIST = (
#     "weblate.trans.autofixes.whitespace.SameBookendingWhitespace",
#     "weblate.trans.autofixes.chars.ReplaceTrailingDotsWithEllipsis",
#     "weblate.trans.autofixes.chars.RemoveZeroSpace",
#     "weblate.trans.autofixes.chars.RemoveControlChars",
# )

# List of enabled addons
# WEBLATE_ADDONS = (
#     "weblate.addons.gettext.GenerateMoAddon",
#     "weblate.addons.gettext.UpdateLinguasAddon",
#     "weblate.addons.gettext.UpdateConfigureAddon",
#     "weblate.addons.gettext.MsgmergeAddon",
#     "weblate.addons.gettext.GettextCustomizeAddon",
#     "weblate.addons.gettext.GettextAuthorComments",
#     "weblate.addons.cleanup.CleanupAddon",
#     "weblate.addons.cleanup.RemoveBlankAddon",
#     "weblate.addons.consistency.LanguaugeConsistencyAddon",
#     "weblate.addons.discovery.DiscoveryAddon",
#     "weblate.addons.autotranslate.AutoTranslateAddon",
#     "weblate.addons.flags.SourceEditAddon",
#     "weblate.addons.flags.TargetEditAddon",
#     "weblate.addons.flags.SameEditAddon",
#     "weblate.addons.flags.BulkEditAddon",
#     "weblate.addons.generate.GenerateFileAddon",
#     "weblate.addons.generate.PseudolocaleAddon",
#     "weblate.addons.generate.PrefillAddon",
#     "weblate.addons.json.JSONCustomizeAddon",
#     "weblate.addons.properties.PropertiesSortAddon",
#     "weblate.addons.git.GitSquashAddon",
#     "weblate.addons.removal.RemoveComments",
#     "weblate.addons.removal.RemoveSuggestions",
#     "weblate.addons.resx.ResxUpdateAddon",
#     "weblate.addons.yaml.YAMLCustomizeAddon",
#     "weblate.addons.cdn.CDNJSAddon",
# )

```

(suite sur la page suivante)

(suite de la page précédente)

```

# E-mail address that error messages come from.
SERVER_EMAIL = "noreply@example.com"

# Default email address to use for various automated correspondence from
# the site managers. Used for registration emails.
DEFAULT_FROM_EMAIL = "noreply@example.com"

# List of URLs your site is supposed to serve
ALLOWED_HOSTS = ["*"]

# Configuration for caching
CACHES = {
    "default": {
        "BACKEND": "django_redis.cache.RedisCache",
        "LOCATION": "redis://127.0.0.1:6379/1",
        # If redis is running on same host as Weblate, you might
        # want to use unix sockets instead:
        # "LOCATION": "unix:///var/run/redis/redis.sock?db=1",
        "OPTIONS": {
            "CLIENT_CLASS": "django_redis.client.DefaultClient",
            "PARSER_CLASS": "redis.connection.HiredisParser",
            # If you set password here, adjust CELERY_BROKER_URL as well
            "PASSWORD": None,
            "CONNECTION_POOL_KWARGS": {},
        },
        "KEY_PREFIX": "weblate",
    },
    "avatar": {
        "BACKEND": "django.core.cache.backends.filebased.FileBasedCache",
        "LOCATION": os.path.join(DATA_DIR, "avatar-cache"),
        "TIMEOUT": 86400,
        "OPTIONS": {"MAX_ENTRIES": 1000},
    },
}

# Store sessions in cache
SESSION_ENGINE = "django.contrib.sessions.backends.cache"
# Store messages in session
MESSAGE_STORAGE = "django.contrib.messages.storage.session.SessionStorage"

# REST framework settings for API
REST_FRAMEWORK = {
    # Use Django's standard `django.contrib.auth` permissions,
    # or allow read-only access for unauthenticated users.
    "DEFAULT_PERMISSION_CLASSES": [
        # Require authentication for login required sites
        "rest_framework.permissions.IsAuthenticated"
        if REQUIRE_LOGIN
        else "rest_framework.permissions.IsAuthenticatedOrReadOnly"
    ],
    "DEFAULT_AUTHENTICATION_CLASSES": (
        "weblate.api.authentication.ProjectTokenAuthentication",
        "rest_framework.authentication.TokenAuthentication",
        "weblate.api.authentication.BearerAuthentication",
        "rest_framework.authentication.SessionAuthentication",
    ),
    "DEFAULT_THROTTLE_CLASSES": (
        "weblate.api.throttling.UserRateThrottle",
        "weblate.api.throttling.AnonRateThrottle",
    ),
}

```

(suite sur la page suivante)

(suite de la page précédente)

```

"DEFAULT_THROTTLE_RATES": {"anon": "100/day", "user": "5000/hour"},
"DEFAULT_PAGINATION_CLASS": ("rest_framework.pagination.PageNumberPagination"),
"PAGE_SIZE": 20,
"VIEW_DESCRIPTION_FUNCTION": "weblate.api.views.get_view_description",
"UNAUTHENTICATED_USER": "weblate.auth.models.get_anonymous",
}

# Fonts CDN URL
FONTS_CDN_URL = None

# Django compressor offline mode
COMPRESS_OFFLINE = False
COMPRESS_OFFLINE_CONTEXT = [
    {"fonts_cdn_url": FONTS_CDN_URL, "STATIC_URL": STATIC_URL, "LANGUAGE_BIDI":
↪True},
    {"fonts_cdn_url": FONTS_CDN_URL, "STATIC_URL": STATIC_URL, "LANGUAGE_BIDI":
↪False},
]

# Require login for all URLs
if REQUIRE_LOGIN:
    LOGIN_REQUIRED_URLS = (r"/(.*)$",)

# In such case you will want to include some of the exceptions
# LOGIN_REQUIRED_URLS_EXCEPTIONS = (
#     rf"{URL_PREFIX}/accounts/(.*)$", # Required for login
#     rf"{URL_PREFIX}/admin/login/(.*)$", # Required for admin login
#     rf"{URL_PREFIX}/static/(.*)$", # Required for development mode
#     rf"{URL_PREFIX}/widgets/(.*)$", # Allowing public access to widgets
#     rf"{URL_PREFIX}/data/(.*)$", # Allowing public access to data exports
#     rf"{URL_PREFIX}/hooks/(.*)$", # Allowing public access to notification hooks
#     rf"{URL_PREFIX}/healthz/$", # Allowing public access to health check
#     rf"{URL_PREFIX}/api/(.*)$", # Allowing access to API
#     rf"{URL_PREFIX}/js/i18n/$", # JavaScript localization
#     rf"{URL_PREFIX}/contact/$", # Optional for contact form
#     rf"{URL_PREFIX}/legal/(.*)$", # Optional for legal app
# )

# Silence some of the Django system checks
SILENCED_SYSTEM_CHECKS = [
    # We have modified django.contrib.auth.middleware.AuthenticationMiddleware
    # as weblate.accounts.middleware.AuthenticationMiddleware
    "admin.E408"
]

# Celery worker configuration for testing
# CELERY_TASK_ALWAYS_EAGER = True
# CELERY_BROKER_URL = "memory://"
# CELERY_TASK_EAGER_PROPAGATES = True
# Celery worker configuration for production
CELERY_TASK_ALWAYS_EAGER = False
CELERY_BROKER_URL = "redis://localhost:6379"
CELERY_RESULT_BACKEND = CELERY_BROKER_URL

# Celery settings, it is not recommended to change these
CELERY_WORKER_MAX_MEMORY_PER_CHILD = 200000
CELERY_BEAT_SCHEDULE_FILENAME = os.path.join(DATA_DIR, "celery", "beat-schedule")
CELERY_TASK_ROUTES = {
    "weblate.trans.tasks.auto_translate*": {"queue": "translate"},
    "weblate.accounts.tasks.notify*": {"queue": "notify"},
    "weblate.accounts.tasks.send_mails": {"queue": "notify"},
}

```

(suite sur la page suivante)

(suite de la page précédente)

```

"weblate.utils.tasks.settings_backup": {"queue": "backup"},
"weblate.utils.tasks.database_backup": {"queue": "backup"},
"weblate.wladmin.tasks.backup": {"queue": "backup"},
"weblate.wladmin.tasks.backup_service": {"queue": "backup"},
"weblate.memory.tasks.*": {"queue": "memory"},
}

# Enable plain database backups
DATABASE_BACKUP = "plain"

# Enable auto updating
AUTO_UPDATE = False

# PGP commits signing
WEBLATE_GPG_IDENTITY = None

# Third party services integration
MATOMO_SITE_ID = None
MATOMO_URL = None
GOOGLE_ANALYTICS_ID = None
SENTRY_DSN = None
SENTRY_ENVIRONMENT = SITE_DOMAIN
AKISMET_API_KEY = None

```

## 2.18 Commandes de gestion

**Note :** Running management commands under a different user than the one running your webserver can result in files getting wrong permissions, please check *Permissions du système de fichiers* for more details.

You will find basic management commands (available as `./manage.py` in the Django sources, or as an extended set in a script called **weblate** installable atop Weblate).

### 2.18.1 Invoking management commands

As mentioned before, invocation depends on how you installed Weblate.

If using virtualenv for Weblate, you can either specify the full path to **weblate**, or activate the virtualenv prior to invoking it :

```

# Direct invocation
~/weblate-env/bin/weblate

# Activating virtualenv adds it to search path
. ~/weblate-env/bin/activate
weblate

```

If you are using source code directly (either from a tarball or Git checkout), the management script is `./manage.py` available in the Weblate sources. To run it :

```
python ./manage.py list_versions
```

If you've installed Weblate using the pip or pip3 installer, or by using the `./setup.py` script, the **weblate** is installed to your path (or virtualenv path), from where you can use it to control Weblate :

```
weblate list_versions
```

For the Docker image, the script is installed like above, and you can run it using **docker exec** :

```
docker exec --user weblate <container> weblate list_versions
```

For **docker-compose** the process is similar, you just have to use **docker-compose exec** :

```
docker-compose exec --user weblate weblate weblate list_versions
```

In case you need to pass it a file, you can temporary add a volume :

```
docker-compose exec --user weblate /tmp:/tmp weblate weblate importusers /tmp/  
↪users.json
```

**Voir aussi :**

*Installing using Docker, Installation sur Debian et Ubuntu, Installation sur SUSE et openSUSE, Installing on RedHat, Fedora and CentOS, Installing from sources*

### 2.18.2 add\_suggestions

**weblate add\_suggestions <project> <component> <language> <file>**

Nouveau dans la version 2.5.

Imports a translation from the file to use as a suggestion for the given translation. It skips duplicated translations ; only different ones are added.

**--author** USER@EXAMPLE.COM

E-mail of author for the suggestions. This user has to exist prior to importing (you can create one in the admin interface if needed).

Exemple :

```
weblate --author michal@cihar.com add_suggestions weblate application cs /tmp/  
↪suggestions-cs.po
```

### 2.18.3 auto\_translate

**weblate auto\_translate <project> <component> <language>**

Nouveau dans la version 2.5.

Modifié dans la version 4.6 : Ajouter un paramètre pour le mode de traduction.

Performs automatic translation based on other component translations.

**--source** PROJECT/COMPONENT

Specifies the component to use as source available for translation. If not specified all components in the project are used.

**--user** USERNAME

Specify username listed as author of the translations. « Anonymous user » is used if not specified.

**--overwrite**

Whether to overwrite existing translations.

**--inconsistent**

Whether to overwrite existing translations that are inconsistent (see *Incohérence*).

**--add**

Automatically add language if a given translation does not exist.

**--mt** MT

Use machine translation instead of other components as machine translations.



**--threshold** THRESHOLD

Similarity threshold for machine translation, defaults to 80.

**--mode** MODE

Specify translation mode, default is `translate` but `fuzzy` or `suggest` can be used.

Exemple :

```
weblate auto_translate --user nijel --inconsistent --source weblate/application_
↪weblate website cs
```

**Voir aussi :**

*Traduction automatique*

## 2.18.4 celery\_queues

**weblate celery\_queues**

Nouveau dans la version 3.7.

Displays length of Celery task queues.

## 2.18.5 checkgit

**weblate checkgit** <project|project/component>

Prints current state of the back-end Git repository.

You can either define which project or component to update (for example `weblate/application`), or use `--all` to update all existing components.

## 2.18.6 commitgit

**weblate commitgit** <project|project/component>

Commits any possible pending changes to the back-end Git repository.

You can either define which project or component to update (for example `weblate/application`), or use `--all` to update all existing components.

## 2.18.7 commit\_pending

**weblate commit\_pending** <project|project/component>

Commits pending changes older than a given age.

You can either define which project or component to update (for example `weblate/application`), or use `--all` to update all existing components.

**--age** HOURS

Age in hours for committing. If not specified the value configured in *Configuration des composants* is used.

---

**Note :** This is automatically performed in the background by Weblate, so there no real need to invoke this manually, besides forcing an earlier commit than specified by *Configuration des composants*.

---

**Voir aussi :**

*Running maintenance tasks*, `COMMIT_PENDING_HOURS`

## 2.18.8 cleanuptrans

### **weblate cleanuptrans**

Cleans up orphaned checks and translation suggestions. There is normally no need to run this manually, as the cleanups happen automatically in the background.

**Voir aussi :**

*Running maintenance tasks*

## 2.18.9 cleanup\_ssh\_keys

### **weblate cleanup\_ssh\_keys**

Nouveau dans la version 4.9.1.

Performs cleanup of stored SSH host keys :

- Removes deprecated RSA keys for GitHub which might cause issues connecting to GitHub.
- Removes duplicate entries in host keys.

**Voir aussi :**

*SSH repositories*

## 2.18.10 createadmin

### **weblate createadmin**

Creates an `admin` account with a random password, unless it is specified.

**--password** PASSWORD

Provides a password on the command-line, to not generate a random one.

**--no-password**

Do not set password, this can be useful with `-update`.

**--username** USERNAME

Use the given name instead of `admin`.

**--email** USER@EXAMPLE.COM

Specify the admin e-mail address.

**--name**

Specify the admin name (visible).

**--update**

Update the existing user (you can use this to change passwords).

Modifié dans la version 2.9 : Added parameters `--username`, `--email`, `--name` and `--update`.

## 2.18.11 dump\_memory

### **weblate dump\_memory**

Nouveau dans la version 2.20.

Export a JSON file containing Weblate Translation Memory content.

**Voir aussi :**

*Mémoire de traduction, Schéma de mémoire des traductions Weblate*

### 2.18.12 dumpuserdata

**weblate dumpuserdata** <file.json>

Dumps userdata to a file for later use by *importuserdata*

---

**Indication :** This comes in handy when migrating or merging Weblate instances.

---

### 2.18.13 import\_demo

**weblate import\_demo**

Nouveau dans la version 4.1.

Creates a demo project with components based on <<https://github.com/WeblateOrg/demo>>.

This can be useful when developing Weblate.

### 2.18.14 import\_json

**weblate import\_json** <json-file>

Nouveau dans la version 2.7.

Batch import of components based on JSON data.

The imported JSON file structure pretty much corresponds to the component object (see *GET /api/components/(string:project)/(string:component)/*). You have to include the name and filemask fields.

**--project** PROJECT

Specifies where the components will be imported from.

**--main-component** COMPONENT

Use the given VCS repository from this component for all of them.

**--ignore**

Skip (already) imported components.

**--update**

Update (already) imported components.

Modifié dans la version 2.9 : The parameters `--ignore` and `--update` are there to deal with already imported components.

Example of JSON file :

```
[
  {
    "slug": "po",
    "name": "Gettext PO",
    "file_format": "po",
    "filemask": "po/*.po",
    "new_lang": "none"
  },
  {
    "name": "Android",
    "filemask": "android/values-*/strings.xml",
    "template": "android/values/strings.xml",
    "repo": "weblate://test/test",
    "file_format": "aresource"
  }
]
```

(suite sur la page suivante)

```
}  
]
```

Voir aussi :

*import\_memory*

### 2.18.15 import\_memory

**weblate import\_memory <file>**

Nouveau dans la version 2.20.

Imports a TMX or JSON file into the Weblate translation memory.

**--language-map** LANGMAP

Allows mapping languages in the TMX to the Weblate translation memory. The language codes are mapped after normalization usually done by Weblate.

--language-map en\_US:en va par exemple importer toutes les chaînes en\_US en tant que en.

This can be useful in case your TMX file locales happen not to match what you use in Weblate.

Voir aussi :

*Mémoire de traduction, Schéma de mémoire des traductions Weblate*

### 2.18.16 import\_project

**weblate import\_project <project> <gitrepo> <branch> <filemask>**

Modifié dans la version 3.0 : The import\_project command is now based on the *Découverte du composant* add-on, leading to some changes in behavior and what parameters are accepted.

Batch imports components into project based on the file mask.

<project> names an existing project, into which the components are to be imported.

The <gitrepo> defines the Git repository URL to use, and <branch> signifies the Git branch. To import additional translation components from an existing Weblate component, use a *weblate ://<project>/<component>* URL for the <gitrepo>.

The <filemask> defines file discovery for the repository. It can be either be made simple using wildcards, or it can use the full power of regular expressions.

The simple matching uses **\*\*** for component name and **\*** for language, for example : **\*\*/\* .po**

The regular expression has to contain groups named *component* and *language*. For example : **(?P<language>[^\s]\*) / (?P<component>[^\s]\*) \.po**

The import matches existing components based on files and adds the ones that do not exist. It does not change already existing ones.

**--name-template** TEMPLATE

Customize the name of a component using Django template syntax.

For example : **Documentation: {{ component }}**

**--base-file-template** TEMPLATE

Customize the base file for monolingual translations.

For example : **{{ component }}/res/values/string.xml**

**--new-base-template** TEMPLATE

Customize the base file for addition of new translations.

For example : **{{ component }}/ts/en.ts**

**--file-format** FORMAT

You can also specify the file format to use (see *Formats de fichiers pris en charge*), the default is auto-detection.

**--language-regex** REGEX

You can specify language filtering (see *Configuration des composants*) with this parameter. It has to be a valid regular expression.

**--main-component**

You can specify which component will be chosen as the main one—the one actually containing the VCS repository.

**--license** NAME

Specify the overall, project or component translation license.

**--license-url** URL

Specify the URL where the translation license is to be found.

**--vcs** NAME

In case you need to specify which version control system to use, you can do it here. The default version control is Git.

To give you some examples, let's try importing two projects.

First The Debian Handbook translations, where each language has separate a folder with the translations of each chapter :

```
weblate import_project \
  debian-handbook \
  git://anonscm.debian.org/debian-handbook/debian-handbook.git \
  squeeze/master \
  '*/**.po'
```

Then the Tanaguru tool, where the file format needs be specified, along with the base file template, and how all components and translations are located in single folder :

```
weblate import_project \
  --file-format=properties \
  --base-file-template=web-app/tgol-web-app/src/main/resources/i18n/%s-I18N.
↪properties \
  tanaguru \
  https://github.com/Tanaguru/Tanaguru \
  master \
  web-app/tgol-web-app/src/main/resources/i18n/**-I18N*.properties
```

More complex example of parsing of filenames to get the correct component and language out of a filename like `src/security/Numerous_security_holes_in_0.10.1.de.po`:

```
weblate import_project \
  tails \
  git://git.tails.boum.org/tails master \
  'wiki/src/security/(?P<component>.*).\.(?P<language>[^.]*)\.po$'
```

Filtering only translations in a chosen language :

```
./manage import_project \
  --language-regex '^(cs|sk)$' \
  weblate \
  https://github.com/WeblateOrg/weblate.git \
  'weblate/locale/*/LC_MESSAGES/**/*.po'
```

Importing Sphinx documentation split to multiple files :

```
$ weblate import_project --name-template 'Documentation: %s' \
  --file-format po \
```

(suite sur la page suivante)

(suite de la page précédente)

```
project https://github.com/project/docs.git master \
'docs/locale/*/LC_MESSAGES/**/*.po'
```

Importing Sphinx documentation split to multiple files and directories :

```
$ weblate import_project --name-template 'Directory 1: %s' \
--file-format po \
project https://github.com/project/docs.git master \
'docs/locale/*/LC_MESSAGES/dir1/**/*.po'
$ weblate import_project --name-template 'Directory 2: %s' \
--file-format po \
project https://github.com/project/docs.git master \
'docs/locale/*/LC_MESSAGES/dir2/**/*.po'
```

**Voir aussi :**

More detailed examples can be found in the starting chapter, alternatively you might want to use *import\_json*.

### 2.18.17 importuserdata

**weblate importuserdata <file.json>**

Imports user data from a file created by *dumpuserdata*

### 2.18.18 importusers

**weblate importusers --check <file.json>**

Imports users from JSON dump of the Django auth\_users database.

**--check**

With this option it will just check whether a given file can be imported and report possible conflicts arising from usernames or e-mails.

You can dump users from the existing Django installation using :

```
weblate dumpdata auth.User > users.json
```

### 2.18.19 install\_addon

Nouveau dans la version 3.2.

**weblate install\_addon --addon ADDON <project|project/component>**

Installs an add-on to a set of components.

**--addon** ADDON

Name of the add-on to install. For example *weblate.gettext.customize*.

**--configuration** CONFIG

JSON encoded configuration of an add-on.

**--update**

Mettre à jour la configuration existante du module complémentaire.

You can either define which project or component to install the add-on in (for example *weblate/application*), or use *--all* to include all existing components.

To install *Personnaliser la sortie gettext* for all components :

```
weblate install_addon --addon weblate.gettext.customize --config '{"width": -1}' --
↪update --all
```

**Voir aussi :**

*Modules*

## 2.18.20 list\_languages

**weblate list\_languages <locale>**

Lists supported languages in MediaWiki markup - language codes, English names and localized names.

This is used to generate `<https://wiki.l10n.cz/Slovn%C3%ADk_s_n%C3%A1zvy_jazyk%C5%AF>`.

## 2.18.21 list\_translators

**weblate list\_translators <project|project/component>**

Lists translators by contributed language for the given project :

```
[French]
Jean Dupont <jean.dupont@example.com>
[English]
John Doe <jd@example.com>
```

**--language-code**

List names by language code instead of language name.

You can either define which project or component to use (for example `weblate/application`), or use `--all` to list translators from all existing components.

## 2.18.22 list\_versions

**weblate list\_versions**

Lists all Weblate dependencies and their versions.

## 2.18.23 loadpo

**weblate loadpo <project|project/component>**

Reloads translations from disk (for example in case you have done some updates in the VCS repository).

**--force**

Force update, even if the files should be up-to-date.

**--lang** LANGUAGE

Limit processing to a single language.

You can either define which project or component to update (for example `weblate/application`), or use `--all` to update all existing components.

---

**Note :** You seldom need to invoke this, Weblate will automatically load changed files for every VCS update. This is needed in case you manually changed an underlying Weblate VCS repository or in some special cases following an upgrade.

---

### 2.18.24 lock\_translation

**weblate lock\_translation** <project|project/component>

Prevents further translation of a component.

---

**Indication :** Useful in case you want to do some maintenance on the underlying repository.

---

You can either define which project or component to update (for example `weblate/application`), or use `--all` to update all existing components.

**Voir aussi :**

`unlock_translation`

### 2.18.25 move\_language

**weblate move\_language** source target

Nouveau dans la version 3.0.

Allows you to merge language content. This is useful when updating to a new version which contains aliases for previously unknown languages that have been created with the *(generated)* suffix. It moves all content from the *source* language to the *target* one.

Exemple :

```
weblate move_language cze cs
```

After moving the content, you should check whether there is anything left (this is subject to race conditions when somebody updates the repository meanwhile) and remove the *(generated)* language.

### 2.18.26 pushgit

**weblate pushgit** <project|project/component>

Pushes committed changes to the upstream VCS repository.

**--force-commit**

Force commits any pending changes, prior to pushing.

You can either define which project or component to update (for example `weblate/application`), or use `--all` to update all existing components.

---

**Note :** Weblate pushes changes automatically if *Pousser lors de l'archivage* in *Configuration des composants* is turned on, which is the default.

---



### 2.18.27 unlock\_translation

**weblate unlock\_translation** <project|project/component>

Unlocks a given component, making it available for translation.

---

**Indication :** Useful in case you want to do some maintenance on the underlying repository.

---

You can either define which project or component to update (for example `weblate/application`), or use `--all` to update all existing components.

**Voir aussi :**

*lock\_translation*

### 2.18.28 setupgroups

**weblate setupgroups**

Configures default groups and optionally assigns all users to that default group.

**--no-privs-update**

Turns off automatic updating of existing groups (only adds new ones).

**--no-projects-update**

Prevents automatic updates of groups for existing projects. This allows adding newly added groups to existing projects, see *Contrôle d'accès au projet*.

**Voir aussi :**

*List of privileges and built-in roles*

### 2.18.29 setuplang

**weblate setuplang**

Updates list of defined languages in Weblate.

**--no-update**

Turns off automatic updates of existing languages (only adds new ones).

### 2.18.30 updatechecks

**weblate updatechecks** <project|project/component>

Updates all checks for all strings.

---

**Indication :** Useful for upgrades which do major changes to checks.

---

You can either define which project or component to update (for example `weblate/application`), or use `--all` to update all existing components.

### 2.18.31 updategit

**weblate updategit** <project|project/component>

Fetches remote VCS repositories and updates the internal cache.

You can either define which project or component to update (for example `weblate/application`), or use `--all` to update all existing components.

---

**Note :** Usually it is better to configure hooks in the repository to trigger *Déclencheurs de notification*, instead of regular polling by `updategit`.

---

## 2.19 Annonces

Modifié dans la version 4.0 : Dans les versions précédentes cette fonctionnalité s'appelait whiteboard messages.


Fournissez des informations à vos traducteurs en publiant des annonces sur l'ensemble du site, par projet, composant ou langue.

Afficher la finalité, les échéances, le statut ou préciser les objectifs de la traduction.

Les utilisateurs seront notifiés des publications pour chaque projet suivi (a moins de se désinscrire).

Cela peut être utile pour différentes raisons, comme la publication de la finalité du site web ou spécifier les objectifs de traduction.

Les publications peuvent être postées à chaque niveau dans le menu *Manage, Post announcement* :






 Weblate


Dashboard

Projects ▾

Languages ▾

Checks ▾



 WeblateOrg

translated 90%

Translations will be used only if they reach 60%. 

Components

Languages

Info

Search

Insights ▾

Files ▾

Tools ▾

Manage ▾

Share ▾

 Not watching ▾

Post announcement 

Message

You can use Markdown and mention users by @username.

Category

Info (light blue) ▾

Category defines color used for the message.

Expiry date

mm/dd/yyyy 

The message will be not shown after this date. Use it to announce string freeze and translation deadline for next release.

☒ Notify users

The message is shown for all translations within the project, until its given expiry, or permanently until it is deleted.

Add

Powered by Weblate 4.11 [About Weblate](#) [Legal](#) [Contact](#) [Documentation](#) [Donate to Weblate](#)

Cela peut aussi être ajouté en utilisant l'interface d'admin :

Weblate administration

WELCOME, **WEBLATE TEST**. [RETURN TO WEBLATE](#) / [DOCUMENTATION](#) / [CHANGE PASSWORD](#) / [SIGN OUT](#)

[Home](#) / [Weblate translations](#) / [Announcements](#) / Add Announcement



### Add Announcement



Required fields are marked in bold.



**Message:**


Translations will be used only if they reach 60%.


You can use Markdown and mention users by @username.

**Project:** WeblateOrg  

**Component:** -----  

**Language:** -----  

**Category:** Info (light blue)   
Category defines color used for the message.

**Expiry date:** Today   
The message will be not shown after this date. Use it to announce string freeze and translation deadline for next release.

☒ Notify users

Save and add another Save and continue editing SAVE

Les publications sont alors affichées en se basant sur leur contexte spécifique :

Aucun contexte spécifié

Montré sur le tableau de bord (page d'accueil).

Projet spécifié

Montré dans le projet, en incluant tous ses composants et traductions.


Composant spécifié

Montré pour un composant donné et toutes ses traductions.

Langue spécifiée

Montré sur la vue d'ensemble de la langue et toutes les traductions dans cette langue.

Voici à quoi cela ressemble sur la page d'ensemble de la langue :

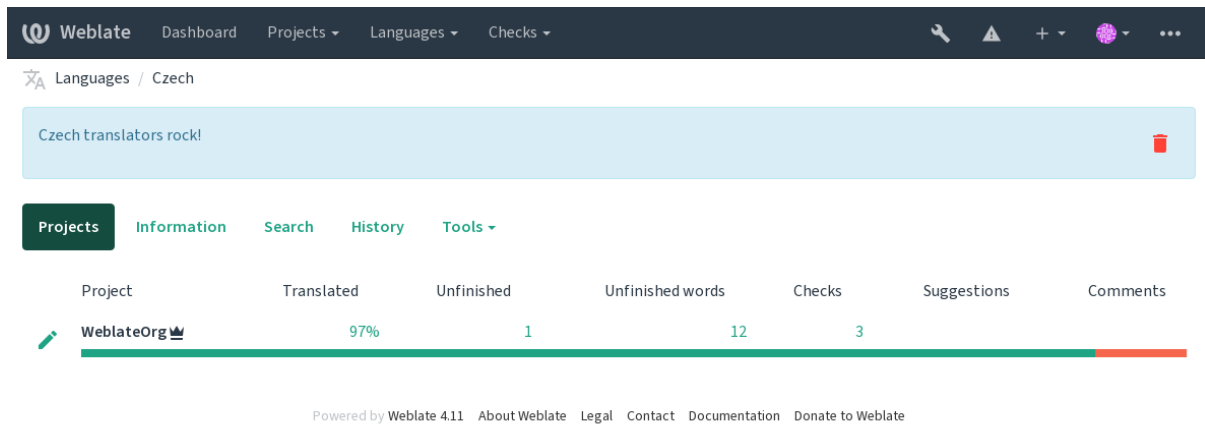

## 2.20 Liste des composants

Specify multiple lists of components to appear as options on the user dashboard, from which users can pick one as their default view. See [Tableau de bord](#) to learn more.

Modifié dans la version 2.20 : A status will be presented for each component list presented on the dashboard.

The names and content of component lists can be specified in the admin interface, in *Component lists* section. Each component list must have a name that is displayed to the user, and a slug representing it in the URL.

Modifié dans la version 2.13 : Change dashboard settings for anonymous users from the admin interface, altering what dashboard is presented to unauthenticated users.

### 2.20.1 Automatic component lists

Nouveau dans la version 2.13.

Add components to the list automatically based on their slug by creating *Automatic component list assignment* rules.

- Useful for maintaining component lists for large installations, or in case you want to have one component list with all components on your Weblate installation.

---

**Indication :** Make a component list containing all the components of your Weblate installation.

---

1. Define *Automatic component list assignment* with `^.*$` as regular expression in both the project and the component fields, as shown on this image :

Weblate administration
WELCOME, **WEBLATE TEST**. [RETURN TO WEBLATE](#) / [DOCUMENTATION](#) / [CHANGE PASSWORD](#) / [SIGN OUT](#)

Home · Weblate translations · Component lists · Add Component list

## Add Component list

Required fields are marked in bold.

**Component list name:**  Display name

**URL slug:**  Name used in URLs and filenames.

☒ Show on dashboard  
When enabled this component list will be shown as a tab on the dashboard

Components:

Available components ⓘ

- WeblateOrg/Django
- WeblateOrg/Language names
- WeblateOrg/WebblateOrg

Choose all ⓘ

Chosen components ⓘ

Remove all

Hold down "Control", or "Command" on a Mac, to select more than one.

AUTOMATIC COMPONENT LIST ASSIGNMENTS

PROJECT REGULAR EXPRESSION ⓘ	COMPONENT REGULAR EXPRESSION ⓘ	DELETE?
<input type="text" value="^.*\$"/>	<input type="text" value="^.*\$"/>	<input type="button" value="✕"/>

+ Add another Automatic component list assignment

Save and add another

Save and continue editing

SAVE

## 2.21 Modules Weblate optionnels

Plusieurs modules optionnels sont disponibles pour votre installation.

## 2.21.1 Exportateur Git

Nouveau dans la version 2.10.

Provides you read-only access to the underlying Git repository using HTTP(S).

### Installation

1. Add `weblate.gitexport` to installed apps in `settings.py`:

```
INSTALLED_APPS += ("weblate.gitexport",)
```

2. Export existing repositories by migrating your database after installation :

```
weblate migrate
```

### Utilisation

The module automatically hooks into Weblate and sets the exported repository URL in the *Configuration des composants*. The repositories are accessible under the `/git/` part of the Weblate URL, for example `https://example.org/git/weblate/main/`.

Repositories for publicly available projects can be cloned without authentication :

```
git clone 'https://example.org/git/weblate/main/'
```

Access to browse the repositories with restricted access (with *Private access control* or when `REQUIRE_LOGIN` is enabled) requires an API token which can be obtained in your *user profile* :

```
git clone 'https://user:KEY@example.org/git/weblate/main/'
```

---

**Indication :** By default members or *Users* group and anonymous user have access to the repositories for public projects via *Access repository* and *Power user* roles.

---

## 2.21.2 Facturation

Nouveau dans la version 2.4.

This is used on *Hosted Weblate* to define billing plans, track invoices and usage limits.

### Installation

1. Add `weblate.billing` to installed apps in `settings.py`:

```
INSTALLED_APPS += ("weblate.billing",)
```

2. Run the database migration to optionally install additional database structures for the module :

```
weblate migrate
```

### Utilisation

After installation you can control billing in the admin interface. Users with billing enabled will get new *Billing* tab in their *Profil utilisateur*.

The billing module additionally allows project admins to create new projects and components without being superusers (see *Adding translation projects and components*). This is possible when following conditions are met :

- The billing is in its configured limits (any overusage results in blocking of project/component creation) and paid (if its price is non zero)
- The user is admin of existing project with billing or user is owner of billing (the latter is necessary when creating new billing for users to be able to import new projects).

Upon project creation user is able to choose which billing should be charged for the project in case he has access to more of them.

### 2.21.3 Mentions légales

Nouveau dans la version 2.15.

This is used on *Hosted Weblate* to provide required legal documents. It comes provided with blank documents, and you are expected to fill out the following templates in the documents :

**legal/documents/tos.html** Terms of service document

**legal/documents/privacy.html** Privacy policy document

**legal/documents/summary.html** Short overview of the terms of service and privacy policy

---

**Note :** Legal documents for the Hosted Weblate service are available in this Git repository <<https://github.com/WeblateOrg/wllegal/tree/main/wllegal/templates/legal/documents>>.

Most likely these will not be directly usable to you, but might come in handy as a starting point if adjusted to meet your needs.

---

### Installation

1. Add `weblate.legal` to installed apps in `settings.py` :

```
INSTALLED_APPS += ("weblate.legal",)

# Optional:

# Social auth pipeline to confirm TOS upon registration/subsequent sign in
SOCIAL_AUTH_PIPELINE += ("weblate.legal.pipeline.tos_confirm",)

# Middleware to enforce TOS confirmation of signed in users
MIDDLEWARE += [
    "weblate.legal.middleware.RequireTOSMiddleware",
]
```

2. Run the database migration to optionally install additional database structures for the module :

```
weblate migrate
```

3. Edit the legal documents in the `weblate/legal/templates/legal/` folder to match your service.



## Utilisation

After installation and editing, the legal documents are shown in the Weblate UI.

### 2.21.4 Avatars

Avatars are downloaded and cached server-side to reduce information leaks to the sites serving them by default. The built-in support for fetching avatars from e-mails addresses configured for it can be turned off using `ENABLE_AVATARS`.

Weblate currently supports :

- Gravatar
- Libravatar

**Voir aussi :**

*Cache Avatar*, `AVATAR_URL_PREFIX`, `ENABLE_AVATARS`

### 2.21.5 Protection contre le spam

You can protect against spamming by users by using the [Akismet](#) service.

1. Install the *akismet* Python module (this is already included in the official Docker image).
2. Obtain the Akismet API key.
3. Store it as `AKISMET_API_KEY` or `WEBLATE_AKISMET_API_KEY` in Docker.

Following content is sent to Akismet for checking :

- Suggestions d'utilisateurs non authentifiés
- Project and component descriptions and links

---

**Note :** This (among other things) relies on IP address of the client, please see [Running behind reverse proxy](#) for properly configuring that.

---

**Voir aussi :**

*Running behind reverse proxy*, `AKISMET_API_KEY`, `WEBLATE_AKISMET_API_KEY`

### 2.21.6 Signing Git commits with GnuPG


Nouveau dans la version 3.1.

All commits can be signed by the GnuPG key of the Weblate instance.

1. Turn on `WEBLATE_GPG_IDENTITY`. (Weblate will generate a GnuPG key when needed and will use it to sign all translation commits.)

Cette fonctionnalité nécessite l'installation de GnuPG 2.1 ou plus récent.

You can find the key in the `DATA_DIR` and the public key is shown on the « About » page :


Weblate
Dashboard
Projects
Languages
Checks
Register
Sign in

About Weblate / Weblate keys

About Weblate
Statistics
Keys

SSH key

SSH key not available.

Commit signing

All commits made with Weblate are signed with the GPG key 177F1C6F2AEC042F3B9824897BB0FA108885150A, for which the corresponding public key is found below.

```

-----BEGIN PGP PUBLIC KEY BLOCK-----

mQGNBGIY7a0BDADrGr2E1x2B0jZ/y7IMFitiBpnHwfwXLzHCpoSwH/gZIf3CLtF3
mx+BwNBCKWzDnLhZUhHKQC+P4e3wXypV4Pr+T5WW5sZTkvFi/CeipXrG35Lca22g
3p7XelxuO4TfxKE3txSWDwgMJEKLYgFtkyw+TbEVI3YNCmONWbcul4HqC4T+JV0K
sxwSlegpd4JcDWtIIOHUIsMHwwy7pAz5jGDNZMXwsgPqd4fhZ/tQZ7YdG+GctHU
gyptivmkiR+/knEbU1F94X9SNWq1uQfAanyfcXC7dlfa7ied3mbt1sRBRGCL9pB0
m7aNOD7XgwJBzWGBvW3SD7Lkj92FPjs0ro2Mv5/Ao9cDyzy3Q2CgH6+6zjEcawUZ
zg8v0stsbFnVSMEoQr563r+OwGgzXKX9mlQftMmXm0PmTOUa48GblJWCT82hmm9
yaZqh0g1+hZ8o+brVb6BCyTydgCrqeZd2CGB8ITf0+PkiJpxqZRUIHjYUARE8/rS
8iyaCmw91sYqBpcAEQEAAbQdV2VibGF0ZSA8d2VibGF0ZUBleGFtcGxlLmNvbT6J
Ac4EEwEKADgWIQQXfxxvKuWELzuYJlI7sPoQilUVCgUCYhjtrQlBawULCQgHAgYV
CgklCwIEFgIDAQIeAQIXgAAKCRB7sPoQilUVCt3fC/9aPKJH8adaCZZ4jWPomsyA
LJ1fPDcoiIPNGdkCz2if5oKyn3JhB0oNK/rblbqdmUV/TSVGk1SRHQkbszrjSDzX
-----END PGP PUBLIC KEY BLOCK-----

```

Powered by Weblate 4.11
About Weblate
Legal
Contact
Documentation
Donate to Weblate

2. Alternatively you can also import existing keys into Weblate, just set `HOME=$DATA_DIR/home` when invoking `gpg`.

**Voir aussi :**

`WEBLATE_GPG_IDENTITY`

## 2.21.7 Limite de requêtes

Modifié dans la version 3.2 : The rate limiting now accepts more fine-grained configuration.

Modifié dans la version 4.6 : The rate limiting no longer applies to superusers.

Several operations in Weblate are rate limited. At most `RATELIMIT_ATTEMPTS` attempts are allowed within `RATELIMIT_WINDOW` seconds. The user is then blocked for `RATELIMIT_LOCKOUT`. There are also settings specific to scopes, for example `RATELIMIT_CONTACT_ATTEMPTS` or `RATELIMIT_TRANSLATE_ATTEMPTS`. The table below is a full list of available scopes.

The following operations are subject to rate limiting :

Nom	Portée	Tentatives autorisées	Ratelimit window	Période de verrouillage
S'inscrire	REGISTRATION	5	300	600
Sending message to admins	MESSAGE	5	300	600
Authentification par mot de passe à la connexion	LOGIN	5	300	600
Recherche à l'échelle du site	SEARCH	6	60	60
Traduction	TRANSLATE	30	60	600
Adding to glossary	GLOSSARY	30	60	600
Starting translation into a new language	LANGUAGE	2	300	600
Creating new project	PROJECT	5	600	600

If a user fails to sign in `AUTH_LOCK_ATTEMPTS` times, password authentication will be turned off on the account until having gone through the process of having its password reset.

The settings can be also applied in the Docker container by adding `WEBLATE_` prefix to the setting name, for example `RATELIMIT_ATTEMPTS` becomes `WEBLATE_RATELIMIT_ATTEMPTS`.

The API has separate rate limiting settings, see [API rate limiting](#).

**Voir aussi :**

*Limite de requêtes, Running behind reverse proxy, API rate limiting*

### 2.21.8 Fedora Messaging integration

Fedora Messaging is AMQP-based publisher for all changes happening in Weblate. You can hook additional services on changes happening in Weblate using this.

The Fedora Messaging integration is available as a separate Python module `weblate-fedora-messaging`. Please see <[https://github.com/WeblateOrg/fedora\\_messaging/](https://github.com/WeblateOrg/fedora_messaging/)> for setup instructions.

## 2.22 Personnaliser Weblate

Extend and customize using Django and Python. Contribute your changes upstream so that everybody can benefit. This reduces your maintenance costs ; code in Weblate is taken care of when changing internal interfaces or refactoring the code.

**Avertissement :** Neither internal interfaces nor templates are considered a stable API. Please review your own customizations for every upgrade, the interfaces or their semantics might change without notice.

**Voir aussi :**

*Contribuer à Weblate*

### 2.22.1 Creating a Python module

If you are not familiar with Python, you might want to look into [Python For Beginners](#), explaining the basics and pointing to further tutorials.

To write some custom Python code (called a module), a place to store it is needed, either in the system path (usually something like `/usr/lib/python3.7/site-packages/`) or in the Weblate directory, which is also added to the interpreter search path.

Better yet, turn your customization into a proper Python package :

1. Create a folder for your package (we will use `weblate_customization`).
2. Within it, create a `setup.py` file to describe the package :

```
from setuptools import setup

setup(
    name="weblate_customization",
    version="0.0.1",
    author="Your name",
    author_email="yourname@example.com",
    description="Sample Custom check for Weblate.",
    license="GPLv3+",
    keywords="Weblate check example",
    packages=["weblate_customization"],
)
```

3. Create a folder for the Python module (also called `weblate_customization`) for the customization code.
4. Within it, create a `__init__.py` file to make sure Python can import the module.
5. This package can now be installed using `pip install -e`. More info to be found in “[Editable](#)” [Installs](#).
6. Once installed, the module can be used in the Weblate configuration (for example `weblate_customization.checks.FooCheck`).

Your module structure should look like this :

```
weblate_customization
├── setup.py
└── weblate_customization
    ├── __init__.py
    ├── addons.py
    └── checks.py
```

You can find an example of customizing Weblate at <https://github.com/WeblateOrg/customize-example>, it covers all the topics described below.

### 2.22.2 Changing the logo

1. Create a simple Django app containing the static files you want to overwrite (see [Creating a Python module](#)). Branding appears in the following files :
  - icons/weblate.svg** Logo shown in the navigation bar.
  - logo-\*.png** Web icons depending on screen resolution and web-browser.
  - favicon.ico** Web icon used by legacy browsers.
  - weblate-\*.png** Avatars for bots or anonymous users. Some web-browsers use these as shortcut icons.
  - email-logo.png** Used in notifications e-mails.
2. Add it to `INSTALLED_APPS` :

```

INSTALLED_APPS = (
    # Add your customization as first
    "weblate_customization",
    # Weblate apps are here...
)

```

3. Run `weblate collectstatic --noinput`, to collect static files served to clients.

#### Voir aussi :

Gestion des fichiers statiques (par ex. images, JavaScript, CSS), *Serving static files*

### 2.22.3 Custom quality checks, add-ons and auto-fixes

Pour installer votre code pour *Personnaliser les réparations automatiques*, *Writing own checks* ou *Writing add-on* dans Weblate :

1. Place the files into your Python module containing the Weblate customization (see *Creating a Python module*).
2. Add its fully-qualified path to the Python class in the dedicated settings (`WEBLATE_ADDONS`, `CHECK_LIST` or `AUTOFIX_LIST`) :

```

# Checks
CHECK_LIST += ("weblate_customization.checks.FooCheck",)

# Autofixes
AUTOFIX_LIST += ("weblate_customization.autofix.FooFixer",)

# Add-ons
WEBLATE_ADDONS += ("weblate_customization.addons.ExamplePreAddon",)

```

#### Voir aussi :

*Personnaliser les réparations automatiques*, *Writing own checks*, *Writing add-on*, *Executing scripts from add-on*

## 2.23 Interface de gestion

L'interface de gestion offre des paramètres d'administration sous l'URL `/manage/`. Elle est disponible pour les utilisateurs connectés avec des privilèges d'administrateur, et est accessible en utilisant l'icône en forme de clé située en haut à droite :

The screenshot displays the Weblate administration dashboard. At the top, there is a navigation bar with the Weblate logo and links to Dashboard, Projects, Languages, and Checks. Below this is a 'Manage' section with various tabs: Weblate status (active), Backups, Translation memory, Performance report, SSH keys, Alerts, Repositories, Users, and Appearance. Under 'Weblate status', there are sub-tabs for Tools and Billing. The main content area shows the 'Weblate support status' section, which includes the Weblate version (4.11), support status (Community support), and buttons to Purchase support package or Donate to Weblate. Below this is the 'Activate support package' section, which includes a text input for an activation token and buttons to Activate or Purchase support package. At the bottom, there is a footer with links to Powered by Weblate 4.11, About Weblate, Legal, Contact, Documentation, and Donate to Weblate.

Powered by Weblate 4.11   About Weblate   Legal   Contact   Documentation   Donate to Weblate

Elle comprend un aperçu de base de votre Weblate :

- Statut de l'assistance, voir [Getting support for Weblate](#)
- Sauvegardes, voir [Sauvegarder et déplacer Weblate](#)
- Mémoire de traduction partagé, voir [Mémoire de traduction](#)
- Rapport de performance pour examiner l'état de Weblate et la longueur des files d'attente Celery
- Gestion des clés SSH, voir [SSH repositories](#)
- Vue d'ensemble des alertes pour tous les composants, voir alerts

### 2.23.1 L'interface d'administration Django

**Avertissement :** Sera supprimé à l'avenir, car son utilisation est découragée — la plupart des fonctionnalités peuvent être gérées directement dans Weblate.

Ici vous pouvez gérer les objets enregistrés dans la base de données, comme les utilisateurs, traductions et autres paramètres :

## Weblate administration

WELCOME **WEBLATE TEST** [RETURN TO WEBLATE](#) / [DOCUMENTATION](#) / [CHANGE PASSWORD](#) / [SIGN OUT](#)

## Site administration

REPORTS		
Weblate support status		
Status of repositories		
SSH keys		
Performance report		
Translation memory		
ACCOUNTS		
Audit log entries	<a href="#">+ Add</a>	<a href="#">Change</a>
User profiles	<a href="#">+ Add</a>	<a href="#">Change</a>
Verified e-mails	<a href="#">+ Add</a>	<a href="#">Change</a>
AUTH TOKEN		
Tokens	<a href="#">+ Add</a>	<a href="#">Change</a>
AUTHENTICATION		
Groups	<a href="#">+ Add</a>	<a href="#">Change</a>
Roles	<a href="#">+ Add</a>	<a href="#">Change</a>
Users	<a href="#">+ Add</a>	<a href="#">Change</a>
BILLING		
Billing plans	<a href="#">+ Add</a>	<a href="#">Change</a>
Customer billings	<a href="#">+ Add</a>	<a href="#">Change</a>
Invoices	<a href="#">+ Add</a>	<a href="#">Change</a>
FONTS		
Font groups	<a href="#">+ Add</a>	<a href="#">Change</a>
Fonts	<a href="#">+ Add</a>	<a href="#">Change</a>
LEGAL		
TOS agreements	<a href="#">+ Add</a>	<a href="#">Change</a>
PYTHON SOCIAL AUTH		
Associations	<a href="#">+ Add</a>	<a href="#">Change</a>
Nonces	<a href="#">+ Add</a>	<a href="#">Change</a>
User social auths	<a href="#">+ Add</a>	<a href="#">Change</a>
SCREENSHOTS		
Screenshots	<a href="#">+ Add</a>	<a href="#">Change</a>
TRANSLATION MEMORY		
Translation memory entries	<a href="#">+ Add</a>	<a href="#">Change</a>
WEBLATE CONFIGURATION		
Settings	<a href="#">+ Add</a>	<a href="#">Change</a>
WEBLATE LANGUAGES		
Languages	<a href="#">+ Add</a>	<a href="#">Change</a>
WEBLATE TRANSLATIONS		
Announcements	<a href="#">+ Add</a>	<a href="#">Change</a>
Component lists	<a href="#">+ Add</a>	<a href="#">Change</a>
Components	<a href="#">+ Add</a>	<a href="#">Change</a>
Contributor agreements	<a href="#">+ Add</a>	<a href="#">Change</a>
Projects	<a href="#">+ Add</a>	<a href="#">Change</a>

## Recent actions

## My actions

None available

Dans la section *Reports*, vous pouvez vérifier le statut de votre site, le modifier pour la *Configuration de production*, où gérer les clefs SSH utilisées pour accéder aux *Accessing repositories*.

Gérer les objets de base de données sous n'importe quelle section. La plus intéressante est probablement *Weblate translations*, où vous pouvez gérer les projets à traduire, voir *Configuration du projet* et *Configuration des composants*.  
guilabel : *Weblate languages* contient les définitions de langage, davantage expliquées dans *Définitions de langue*.

### Ajouter un projet

Ajouter un projet sert de conteneur pour tous les composants. Généralement vous créez un projet pour un logiciel ou un livre (voir *Configuration du projet* pour plus d'infos sur les paramètres individuels) :

Weblate administration

WELCOME, **WEBLATE TEST** · [RETURN TO WEBLATE](#) / [DOCUMENTATION](#) / [CHANGE PASSWORD](#) / [SIGN OUT](#)

Home · Weblate translations · Projects · Add Project

### Add Project

Required fields are marked in bold.

**Project name:**

Display name

**URL slug:**

Name used in URLs and filenames.

**Project website:**

Main website of translated project.

Translation instructions:

You can use Markdown and mention users by @username.

☒ Set "Language-Team" header

Lets Weblate update the "Language-Team" file header of your project.

☒ Use shared translation memory

Uses the pool of shared translations between projects.

☒ Contribute to shared translation memory

Contributes to the pool of shared translations between projects.

**Access control:**

Protected

How to restrict access to this project is detailed in the documentation.

☐ Enable reviews

Requires dedicated reviewers to approve translations.

☐ Enable source reviews

Requires dedicated reviewers to approve source strings.

☒ Enable hooks

Whether to allow updating this repository by remote hooks.

Language aliases:

Comma-separated list of language code mappings, for example: en\_GB,en\_US,en

Save and add another

Save and continue editing

SAVE



**Voir aussi :**

*[Configuration du projet](#)*

## **Composants bilingues**

Une fois que vous avez ajouté un projet, des composants de traductions peuvent y être ajoutés. Voir *[Configuration des composants](#)* pour des infos concernant les paramètres individuels :

## 374

## Chapitre 2. Documentation pour l'administrateur

**Voir aussi :**

*Configuration des composants, Formats monolingues et bilingues*

### **Composants monolingues**

Pour faciliter leur traduction, fournissez un fichier modèle contenant une représentation de message IDs du langage source (généralement l'anglais). Voir *Configuration des composants* pour en savoir plus sur les paramètres individuels :

Webiate administration

WELCOME WEBLATE FIRST TIME! TO WEBLATE · DOCUMENTATION · CHANGE PASSWORD · LOG OUT

Home · Manage repositories · Components · Add Component

REPORT PROBLEMS OR SUGGESTIONS

Add Component

Required fields are marked with \*

Component name

android

Display name

URL slug

android

Name used in URLs and filenames

Project

WebiateOrg

Version control system

Git

Version control system to use to access your repository containing translations. You can also choose additional integration with third party providers to submit merge requests.

Source code repository

weblate:weblateorg/language-names

URL of a repository, see weblate (project) component to share it with other component.

Repository push URL:

URL of a push repository pushing is turned off if empty

Repository browser

Link to repository browser, use (branch) for branch, (file) for file and (tree) as filename and file placeholders. You might want to strip leading slashes by using (stripLeadingSlashes)

Exported repository URL:

URL of repository where users can fetch changes from Weblate

Source string bug reporting address:

E-mail address for reports on errors in source strings. Leave empty for no emails.

Repository branch

Repository branch to translate

Push branch:

Branch for pushing changes, leave empty to use repository branch

File mask

app/src/main/res/values-\*/strings.xml

Part of file to translate relative to repository root, use \* instead of language code, for example src/main/res/values-\*/strings.xml

Modeling of base language file

app/src/main/res/values/strings.xml

Elements of translation base file, containing all strings and their sources, it is recommended for monolingual translation formats.

☒ Get base file

Whether users will be able to edit the base file for monolingual translations.

Intermediate language file

Element of intermediate translation file, in most cases this is a translation file provided by developers and is used when creating actual source strings.

Template for new translations

Element of file used for creating new translations. For projects choose .po file.

File format

Android String Resource

☐ Locked

Locked component will not get any translation updates.

☒ Allow translation propagation

Whether translations updates in other components will cause automatic translation in this one.

☒ Turn on suggestions

Whether to allow translation suggestions at all.

☐ Suggester rating

Users can rate your suggestions and each make direct translations.

Accept/skip suggestions:

0

Automatically accept suggestions with this number of votes, use 0 to turn it off.

Translation flags

Additional internal request flags to influence Weblate behavior.

Enforced checks:

1

List of checks which can not be ignored.

Translation license

MIT License

Contributor agreement

User agreement which needs to be approved before a user can translate this component.

Adding new translation

Create new language file

How to handle requests for creating new translations.

Language code style

Default based on the file format

Customize language code used to generate the filename for translation created by Weblate.

☐ Merge strings

Enables adding and removing strings straight from Weblate. If your strings are extracted from the source code or managed externally you probably want to keep it disabled.

Merge style:

Release

Define whether Weblate should merge the upstream repository or release changes into it.

Current message when translating

Translated using Weblate (1 language, name 1)  
Currently translated at (date translated, percent (%)) (0 data left) (0 strings)  
Translated (0 project, name 1) (0 component, name 1)  
Translated URL: (1 url)

You can use template language for version info, please consult the documentation for more details.

Current message when adding translation

Added translation using Weblate (1 language, name 1)

You can use template language for version info, please consult the documentation for more details.

Current message when removing translation

Deleted translation using Weblate (1 language, name 1)

You can use template language for version info, please consult the documentation for more details.

Current message when merging translation

Merge branch (0 component, merge\_branch 0) into Weblate

You can use template language for version info, please consult the documentation for more details.

Current message when add or remove a change

Update translation files  
Updated by "1 add, name 1" took in Weblate.  
Translated (0 project, name 1) (0 component, name 1)  
Translated URL: (1 url)

You can use template language for version info, please consult the documentation for more details.

☒ Push on commit

Whether the repository should be pushed upstream on every commit.

Age of changes to commit

24

Time in hours after which any pending changes will be committed to the VCS.

☒ Look on error

Whether the component should be locked on repository errors.

Source language

English

Language used for source strings in all components.

Language filter

\*[a-z]

Regular expression used to filter translation files when scanning for file mask.

Validate regular expressions

Regular expression used to determine validity of a string.

Priority

Medium

Components with higher priority are offered first to translators.

☐ Restricted component

Restricted access to the component to only those explicitly given permission.

Share in projects

WebiateOrg

Choose additional projects where this component will be listed: hold down "Control" or "Command" as a file, to select more than one.

☐ Use as a glossary

Glossary color

Silver

Barcode revision

Local revision

Save and edit online · Save and download codes · Save

Voir aussi :

*Configuration des composants, Formats monolingues et bilingues*

## 2.24 Getting support for Weblate

Weblate is copylefted libre software with community support. Subscribers receive priority support at no extra charge. Prepaid help packages are available for everyone. You can find more info about current support offerings at <https://weblate.org/support/>.

### 2.24.1 Intégration de l'assistance

Nouveau dans la version 3.8.

Purchased support packages can optionally be integrated into your Weblate [subscription management](#) interface, from where you will find a link to it. Basic instance details about your installation are also reported back to Weblate this way.

The screenshot shows the 'Manage' section of the Weblate interface. It includes a top navigation bar with 'Weblate', 'Dashboard', 'Projects', 'Languages', and 'Checks'. Below this is a 'Manage' sub-header with a wrench icon. A horizontal menu contains 'Weblate status' (highlighted), 'Backups', 'Translation memory', 'Performance report', 'SSH keys', 'Alerts', 'Repositories', 'Users', and 'Appearance'. Under 'Weblate status', there are links for 'Tools' and 'Billing'.

The 'Weblate support status' section displays the following information:

- Weblate version:** 4.11 — 94d3394b1a9c91a751831fb3a1eb88c60e6afc2f
- Support status:** Community support

Below this information are two buttons: 'Purchase support package' and 'Donate to Weblate'.

The 'Activate support package' section includes a description: 'The support packages include priority e-mail support, or cloud backups of your Weblate installation.' It features an 'Activation token' input field with a placeholder text: 'Please enter the activation token obtained when making the subscription.' At the bottom of this section are two buttons: 'Activate' and 'Purchase support package'.

Powered by Weblate 4.11 [About Weblate](#) [Legal](#) [Contact](#) [Documentation](#) [Donate to Weblate](#)

### 2.24.2 Data submitted to the Weblate

- URL where your Weblate instance is configured
- Your site title
- The Weblate version you are running
- Tallies of some objects in your Weblate database (projects, components, languages, source strings and users)
- The public SSH key of your instance

Additionally, when *Découverte Weblate* is turned on :

- List of public projects (name, URL and website)

No other data is submitted.

### 2.24.3 Intégration de services

- See if your support package is still valid
- *Espace de sauvegarde provisionné par Weblate*
- *Découverte Weblate*

---

**Indication :** Purchased support packages are already activated upon purchase, and can be used without integrating them.

---

### 2.24.4 Découverte Weblate

Nouveau dans la version 4.5.2.

---

**Note :** Cette fonctionnalité est actuellement en version bêta.

---

Discover Weblate is an opt-in service that makes it easier for users to find Weblate servers and communities. Users can browse registered services on <<https://weblate.org/discover/>>, and find there projects to contribute.


#### Getting listed

---

**Indication :** Participating in Discover Weblate makes Weblate submit some information about your server, please see *Data submitted to the Weblate*.

---

To list your server with an active support subscription (see *Intégration de l'assistance*) in Discover Weblate all you need to do is turn this on in the management panel :

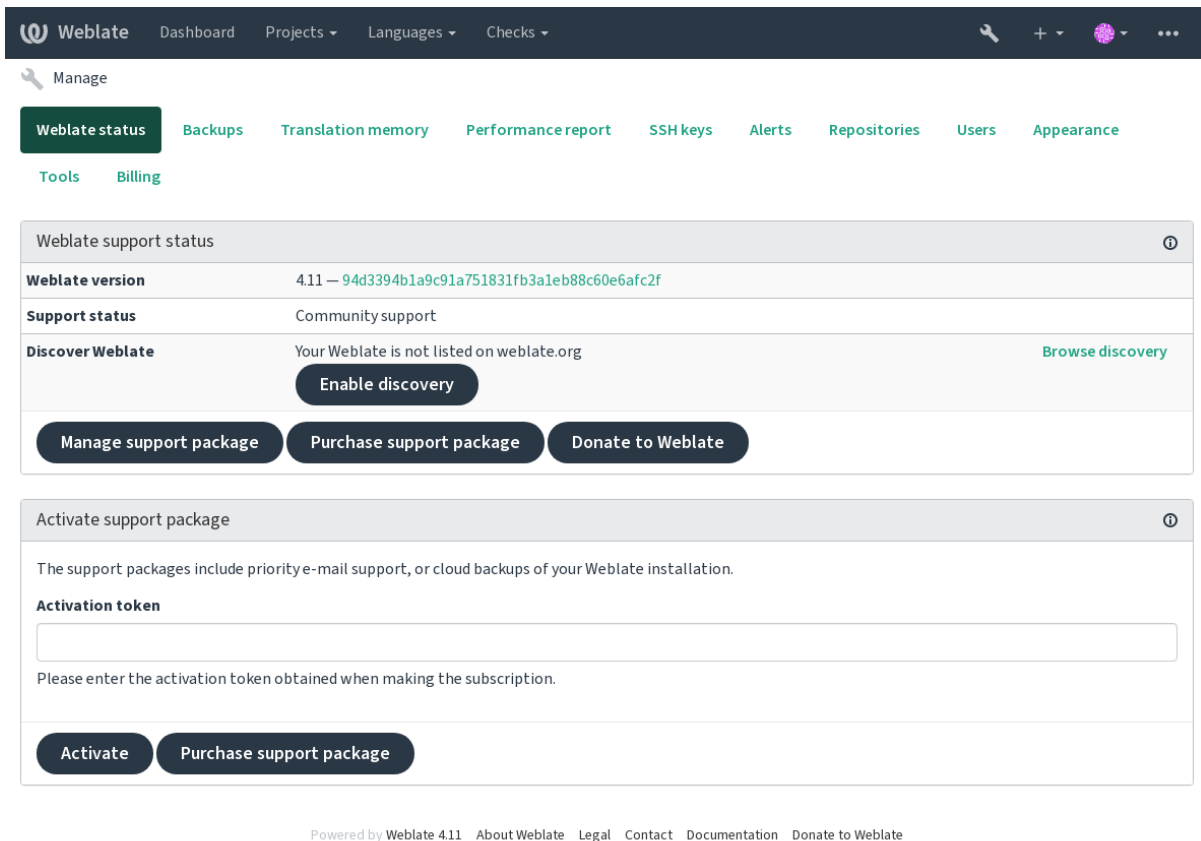

**Weblate** Dashboard Projects Languages Checks

Manage

**Weblate status** Backups Translation memory Performance report SSH keys Alerts Repositories Users Appearance

Tools Billing

**Weblate support status** ⓘ

**Weblate version** 4.11 — 94d3394b1a9c91a751831fb3a1eb88c60e6afc2f

**Support status** Community support

**Discover Weblate** Your Weblate is not listed on weblate.org [Browse discovery](#)

**Enable discovery**

**Manage support package** **Purchase support package** **Donate to Weblate**

**Activate support package** ⓘ

The support packages include priority e-mail support, or cloud backups of your Weblate installation.

**Activation token**

Please enter the activation token obtained when making the subscription.

**Activate** **Purchase support package**

Powered by Weblate 4.11 [About Weblate](#) [Legal](#) [Contact](#) [Documentation](#) [Donate to Weblate](#)

Listing your server without a support subscription in Discover Weblate :

1. Register yourself at <https://weblate.org/user/>
2. Register your Weblate server in the discovery database at <https://weblate.org/subscription/discovery/>
3. Confirm the service activation in your Weblate and turn on the discovery listing in your Weblate management page using *Enable discovery* button :

**Weblate status**

**Weblate version** 4.11 — 94d3394b1a9c91a751831fb3a1eb88c60e6afc2f

**Support status** Community support

**Discover Weblate** Your Weblate is not listed on weblate.org [Browse discovery](#)

[Enable discovery](#)

[Manage support package](#) [Purchase support package](#) [Donate to Weblate](#)

**Activate support package**

The support packages include priority e-mail support, or cloud backups of your Weblate installation.

**Activation token**

Please enter the activation token obtained when making the subscription.

[Activate](#) [Purchase support package](#)

Powered by Weblate 4.11 [About Weblate](#) [Legal](#) [Contact](#) [Documentation](#) [Donate to Weblate](#)

## Customizing listing

You can customize the listing by providing a text and image (570 x 260 pixels) at <https://weblate.org/user/>.

## 2.25 Documents juridiques

**Note :** Herein you will find various legal information you might need to operate Weblate in certain legal jurisdictions. It is provided as a means of guidance, without any warranty of accuracy or correctness. It is ultimately your responsibility to ensure that your use of Weblate complies with all applicable laws and regulations.

### 2.25.1 ITAR and other export controls

Weblate can be run within your own datacenter or virtual private cloud. As such, it can be used to store ITAR or other export-controlled information, however, end users are responsible for ensuring such compliance.

The Hosted Weblate service has not been audited for compliance with ITAR or other export controls, and does not currently offer the ability to restrict translations access by country.



## 2.25.2 US encryption controls

Weblate does not contain any cryptographic code, but might be subject export controls as it uses third party components utilizing cryptography for authentication, data-integrity and -confidentiality.

Most likely Weblate would be classified as ECCN 5D002 or 5D992 and, as publicly available libre software, it should not be subject to EAR (see [Encryption items NOT Subject to the EAR](#)).

Software components used by Weblate (listing only components related to cryptographic function) :

**Python** See [https://wiki.python.org/moin/PythonSoftwareFoundationLicenseFaq#Is\\_Python\\_subject\\_to\\_export\\_laws.3F](https://wiki.python.org/moin/PythonSoftwareFoundationLicenseFaq#Is_Python_subject_to_export_laws.3F)

**GnuPG** Utilisé en option par Weblate

**Git** Utilisé en option par Weblate

**curl** Used by Git

**OpenSSL** Used by Python and cURL

The strength of encryption keys depends on the configuration of Weblate and the third party components it interacts with, but in any decent setup it will include all export restricted cryptographic functions :

- In excess of 56 bits for a symmetric algorithm
- Factorisation of integers in excess of 512 bits for an asymmetric algorithm
- Computation of discrete logarithms in a multiplicative group of a finite field of size greater than 512 bits for an asymmetric algorithm
- Discrete logarithms in a group different than above in excess of 112 bits for an asymmetric algorithm

Weblate doesn't have any cryptographic activation feature, but it can be configured in a way where no cryptography code would be involved. The cryptographic features include :

- Accessing remote servers using secure protocols (HTTPS)
- Generating signatures for code commits (PGP)

**Voir aussi :**

[Export Controls \(EAR\) on Open Source Software](#)

### 3.1 Contribuer à Weblate

There are dozens of ways to improve Weblate. You can choose the one you feel comfortable with, be it coding, graphics design, documentation, sponsorship, or an idea :

- *Reporting issues in Weblate*
- *Commencer à contribuer au code de Weblate*
- *Translating Weblate*
- *Contribute to Weblate documentation*
- *Weblate discussions*
- *Funding Weblate development*

#### 3.1.1 Translating Weblate

Weblate is continually being [translated](#) using Weblate itself. Feel free to take your part in the effort of making Weblate available in as many human languages as possible. It brings Weblate closer to its users !

If you find a possible mistake in the source string, you can mark it with a comment in the Weblate editor. This way, it can be discussed and corrected. If you're certain, you can also click on the link in the *Source string location* section and submit a PR with your correction.

#### 3.1.2 Contribute to Weblate documentation

You are welcome to improve the documentation page of your choice. Do it easily by clicking the *Edit on GitHub* button in the top-right corner of the page.

Please respect these guidelines while writing :

1. Don't remove part of the documentation if it's valid.
2. Use clear and easily-understandable language. You are writing tech docs, not a poem. Not all docs readers are native speakers, be thoughtful.
3. Don't be afraid to ask if you are not certain. If you have to ask about some feature while editing, don't change its docs before you have the answer. This means : You change or ask. Don't do both at the same time.
4. Verify your changes by performing described actions while following the docs.
5. Send PR with changes in small chunks to make it easier and quicker to review and merge.

6. If you want to rewrite and change the structure of a big article, do it in two steps :
  1. Rewrite
  2. Once the rewrite is reviewed, polished, and merged, change the structure of the paragraphs in another PR.

---

**Indication :** You can [translate the docs](#).

---

### 3.1.3 Extending built-in language definitions

The language definitions are in the [weblate-language-data repository](#).

You are welcome to add missing language definitions to `languages.csv`, other files are generated from that file.

### 3.1.4 Weblate discussions

If you have an idea and not sure if it's suitable for an issue, don't worry. You can join the community in [GitHub discussions](#).

### 3.1.5 Funding Weblate development

You can boost Weblate's development on the [donate page](#). Funds collected there are used to enable gratis hosting for libre software projects and further development of Weblate. Please check the [donate page](#) for options, such as funding goals and the rewards you get as a proud funder.

#### Backers who have funded Weblate

List of Weblate supporters :

- Yashiro Ccs
- Cheng-Chia Tseng
- Timon Reinhard
- [Cassidy James](#)
- Loic Dachary
- Marozed
- <https://freedombox.org/>
- GNU Solidario (GNU Health)
- [BallotReady](#)
- Richard Nespithal
- [MyExpenses.Mobi](#)

Do you want to be in the list ? Please see options on the [Donate to Weblate](#).

## 3.2 Commencer à contribuer au code de Weblate

Understand the Weblate source code by going through *Code source de Weblate*, *Interface de Weblate* and *Weblate internals*.

### 3.2.1 Starting with the codebase

Familiarize yourself with the Weblate codebase, by having a go at the bugs labelled [good first issue](#).

### 3.2.2 Running Weblate locally

The most comfortable approach to get started with Weblate development is to follow [Installing from sources](#). It will get you a virtualenv with editable Weblate sources.

1. Clone the Weblate source code :

```
git clone https://github.com/WeblateOrg/weblate.git
cd weblate
```

2. Create a virtualenv :

```
virtualenv .venv
.venv/bin/activate
```

3. Install Weblate (for this you need some system dependencies, see [Installing from sources](#)) :

```
pip install -e .
```

3. Install all dependencies useful for development :

```
pip install -r requirements-dev.txt
```

4. Start a development server :

```
weblate runserver
```

5. Depending on your configuration, you might also want to start Celery workers :

```
./weblate/examples/celery start
```

6. To run a test (see [Local testing](#) for more details) :

```
. scripts/test-database
./manage.py test
```

**Voir aussi :**

[Installing from sources](#)

### 3.2.3 Running Weblate locally in Docker

If you have Docker and docker-compose installed, you can spin up the development environment by simply running :

```
./rundev.sh
```

It will create a development Docker image and start it. Weblate is running on <http://127.0.0.1:8080/> and you can sign in as the user `admin` using `admin` as the password. The new installation is empty, so you might want to continue with [Adding translation projects and components](#).

The `Dockerfile` and `docker-compose.yml` for this are located in the `dev-docker` directory.

The script also accepts some parameters, to execute tests, run it with the `test` parameter and then specify any `test` parameters, for example running only tests in the `weblate.machine` module :

```
./rundev.sh test --failfast weblate.machine
```

**Note :** Be careful that your Docker containers are up and running before running the tests. You can check that by running the `docker ps` command.

To display the logs :

```
./rundev.sh logs
```

To stop the background containers, run :

```
./rundev.sh stop
```


Running the script without arguments will re-create the Docker container and restart it.

**Note :** This is not a suitable setup for production, as it includes several hacks which are insecure, but they make development easier.


### 3.2.4 Coding Weblate with PyCharm

PyCharm is a known IDE for Python, here are some guidelines to help you set up your Weblate project in it.

Considering you have just cloned the GitHub repository to a folder, just open it with PyCharm. Once the IDE is open, the first step is to specify the interpreter you want to use :

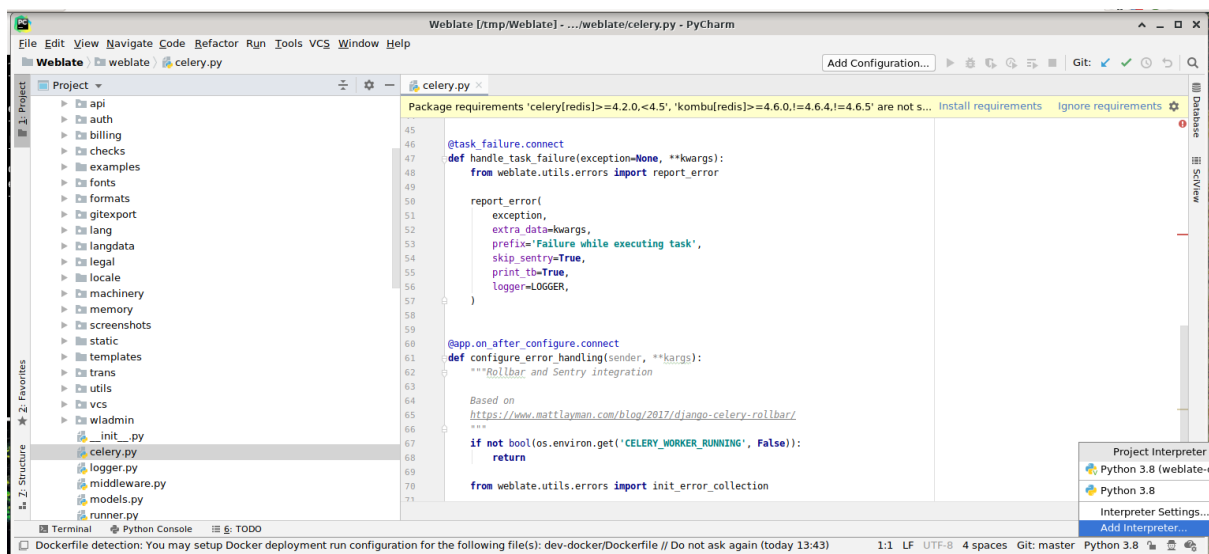


You can either choose to let PyCharm create the virtualenv for you, or select an already existing one :

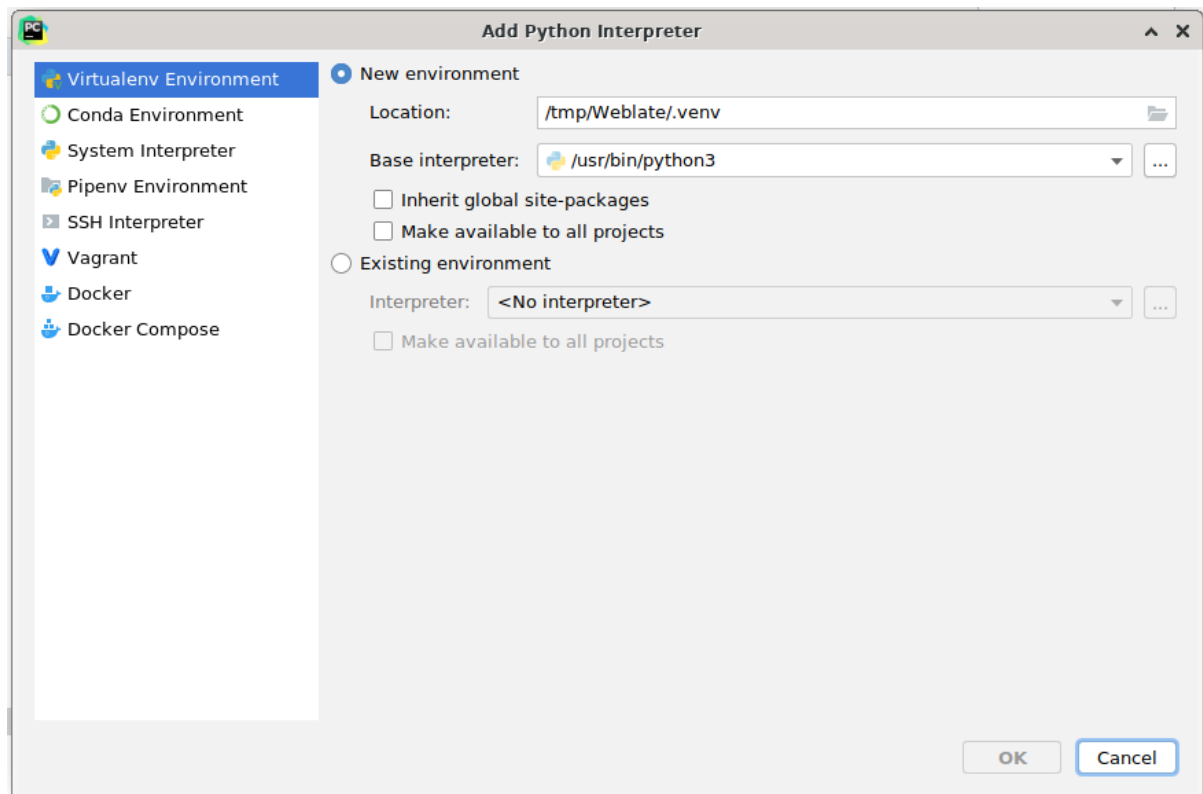


Don't forget to install the dependencies once the interpreter is set : Either through the console (the console from the IDE will directly use your virtualenv by default), or through the interface when you get a warning about missing dependencies.


The second step is to set the right info to use Django natively inside PyCharm : The idea is to be able to immediately trigger the unit tests in the IDE. For that you need to specify the root path of the Django project and the path to its settings :

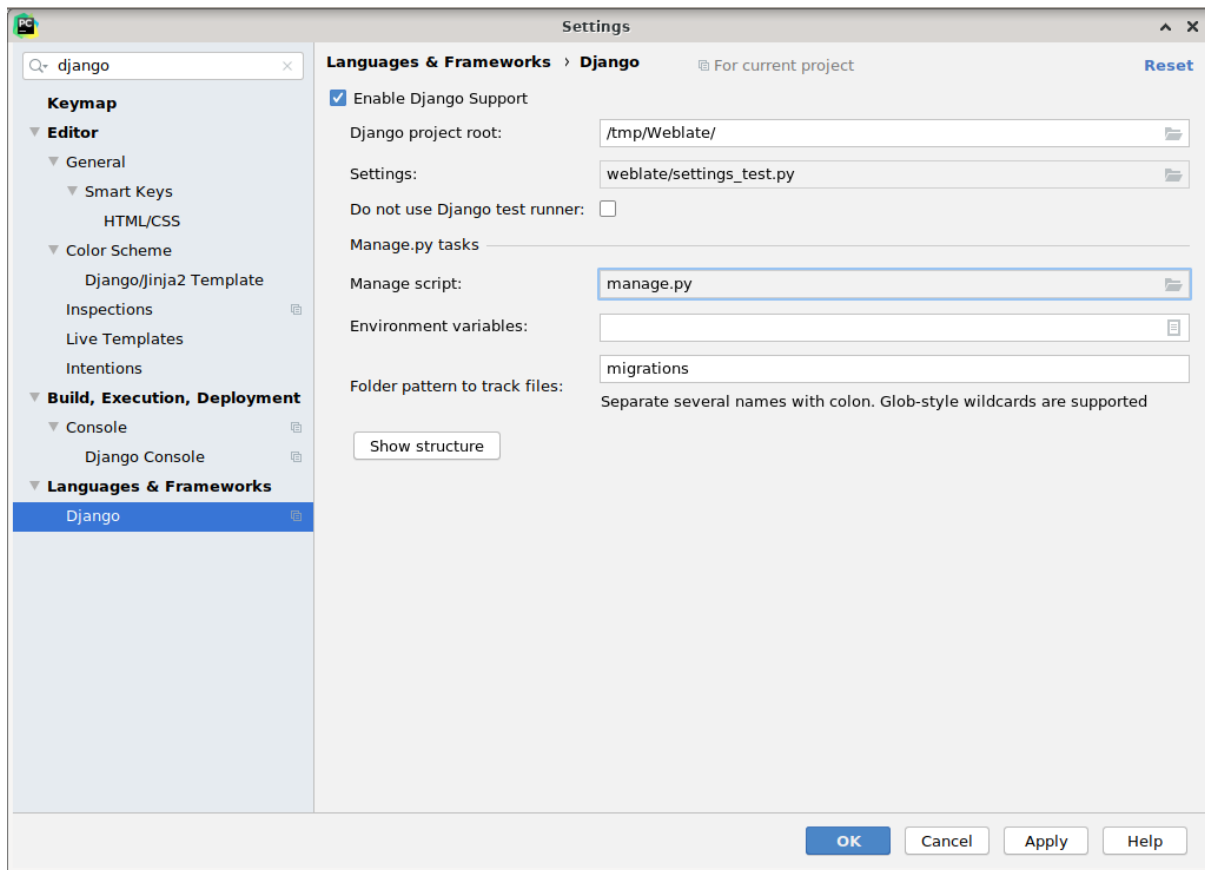

Be careful, the *Django project root* is the actual root of the repository, not the Weblate sub-directory. About the settings, you could use the `weblate/settings_test.py` from the repository, but you could create your own setting and set it there.

The last step is to run the server and to put breakpoints in the code to be able to debug it. This is done by creating a new *Django Server* configuration :

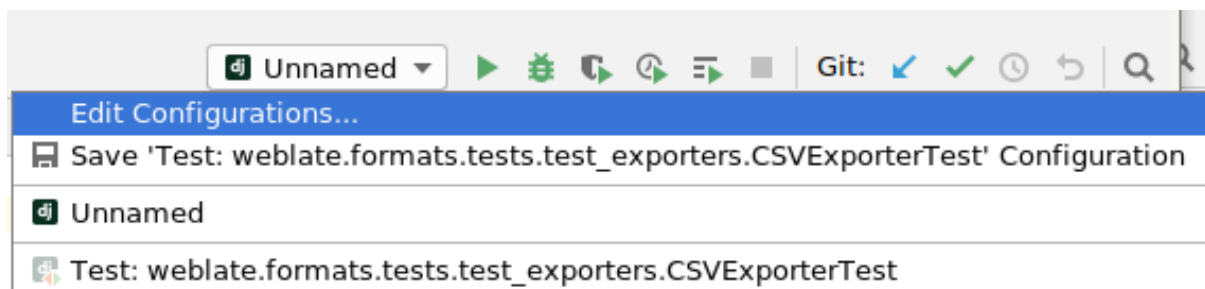

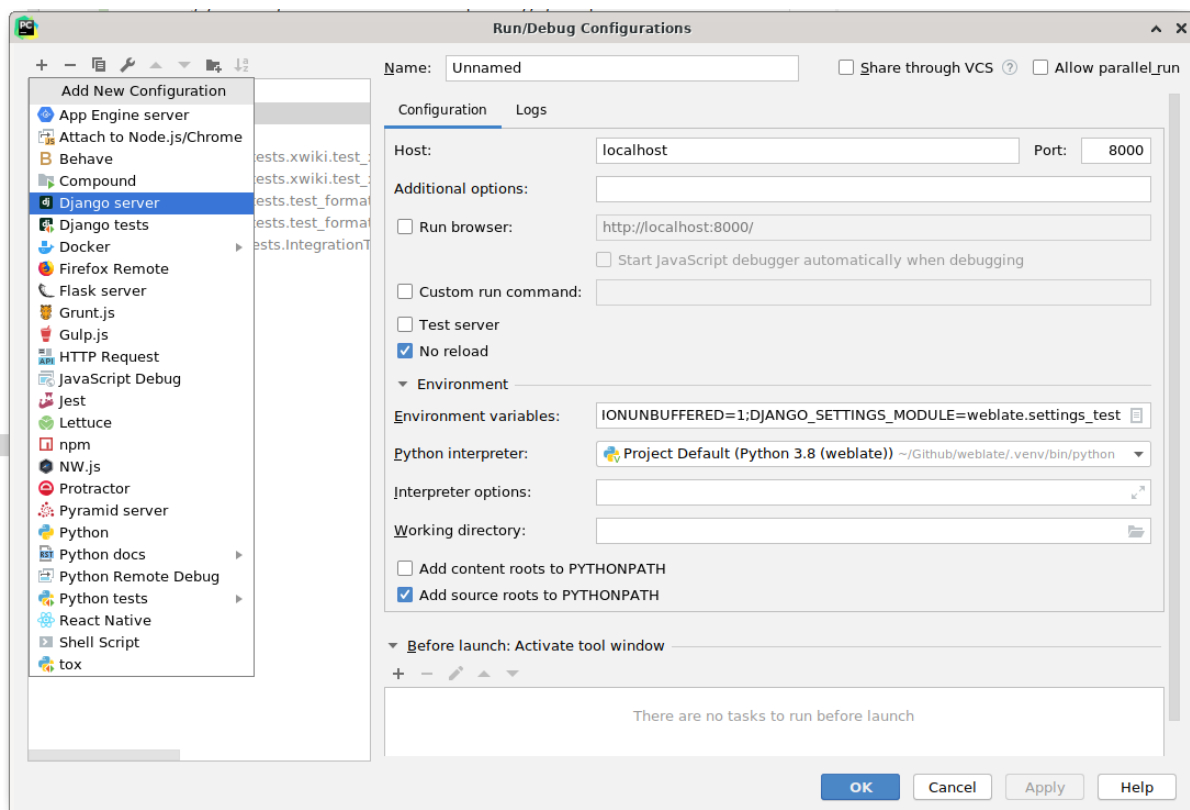

**Indication :** Be careful with the property called *No reload* : It prevents the server from being reloaded live if you modify files. This allows the existing debugger breakpoints to persist, when they normally would be discarded upon reloading the server.

### 3.2.5 Bootstrapping your devel instance

You might want to use `import_demo` to create demo translations and `createadmin` to make an admin user.

## 3.3 Code source de Weblate

Weblate est développé sur [GitHub](#). Vous êtes bienvenu pour bifurquer le code et ouvrir des demandes de tirage. Les correctifs sous toute autre forme sont également les bienvenus.

**Voir aussi :**

Check out [Weblate internals](#) to see how Weblate looks from inside.

### 3.3.1 Security by Design Principles

Any code for Weblate should be written with [Security by Design Principles](#) in mind.



### 3.3.2 Normes de développement

The code should follow PEP-8 coding guidelines and should be formatted using **black** code formatter.

To check the code quality, you can use **flake8**, the recommended plugins are listed in `.pre-commit-config.yaml` and its configuration is placed in `setup.cfg`.

The easiest approach to enforce all this is to install **pre-commit**. Weblate repository contains configuration for it to verify the committed files are sane. After installing it (it is already included in the `requirements-lint.txt`) turn it on by running `pre-commit install` in Weblate checkout. This way all your changes will be automatically checked.

You can also trigger check manually, to check all files run :

```
pre-commit run --all
```

## 3.4 Déboguer Weblate

Bugs can behave as application crashes or as various misbehavior. You are welcome to collect info on any such issue and submit it to the [issue tracker](#).

### 3.4.1 Mode de débogage

Turning on debug mode will make the exceptions show in the web browser. This is useful to debug issues in the web interface, but not suitable for a production environment because it has performance consequences and might leak private data.

In a production environment, use [ADMINS](#) to receive e-mails containing error reports, or configure error collection using a third-party service.

**Voir aussi :**

*[Disable debug mode](#), [Properly configure admins](#), [Collecting error reports](#)*

### 3.4.2 Logs de Weblate

Weblate can produce detailed logs of what is going on in the background. In the default configuration it uses syslog and that makes the log appear either in `/var/log/messages` or `/var/log/syslog` (depending on your syslog daemon configuration).

The Celery process (see [Background tasks using Celery](#)) usually produces its own logs as well. The example system-wide setups logs to several files under `/var/log/celery/`.

Docker containers log to their output (as per usual in the Docker world), so you can look at the logs using `docker-compose logs`.

**Voir aussi :**

*[Configuration d'exemple](#) contains `LOGGING` configuration.*

### 3.4.3 Not processing background tasks

A lot of things are done in the background by Celery workers. If things like sending out e-mails or component removal does not work, there might a related issue.

Choses à vérifier dans ce cas :

- Check that the Celery process is running, see [Background tasks using Celery](#)
- Check the Celery queue status, either in [Interface de gestion](#), or using `celery_queues`
- Look in the Celery logs for errors (see [Logs de Weblate](#))

### 3.4.4 Not receiving e-mails from Weblate

You can verify whether outgoing e-mail is working correctly by using the `sendtestemail` management command (see [Invoking management commands](#) for instructions on how to invoke it in different environments) or by using [Interface de gestion](#) under the *Tools* tab.

These send e-mails directly, so this verifies that your SMTP configuration is correct (see [Configuring outgoing e-mail](#)). Most of the e-mails from Weblate are however sent in the background and there might be some issues with Celery involved as well, please see [Not processing background tasks](#) for debugging that.

### 3.4.5 Analyzing application crashes

In case the application crashes, it is useful to collect as much info about the crash as possible. This can be achieved by using third-party services which can collect such info automatically. You can find info on how to set this up in [Collecting error reports](#).

### 3.4.6 Échecs silencieux

Lots of tasks are offloaded to Celery for background processing. Failures are not shown in the user interface, but appear in the Celery logs. Configuring [Collecting error reports](#) helps you to notice such failures easier.

### 3.4.7 Problèmes de performance

In case Weblate performs badly in some scenario, please collect the relevant logs showing the issue, and anything that might help figuring out where the code might be improved.

In case some requests take too long without any indication, you might want to install `dogslow` along with [Collecting error reports](#) and get pinpointed and detailed tracebacks in the error collection tool.

## 3.5 Weblate internals

---

**Note :** This chapter will give you basic overview of Weblate internals.

---

Weblate derives most of its code structure from, and is based on [Django](#).

### 3.5.1 Directory structure

Quick overview of directory structure of Weblate main repository :

**docs** Source code for this documentation, which can be built using [Sphinx](#).

**dev-docker** Docker code to run development server, see [Running Weblate locally in Docker](#).

**weblate** Source code of Weblate as a [Django](#) application, see [Weblate internals](#).

**weblate/static** Client files (CSS, Javascript and images), see [Interface de Weblate](#).

### 3.5.2 Modules

Weblate consists of several Django applications (some optional, see [Modules Weblate optionnels](#)) :

accounts

User account, profiles and notifications.

addons

Add-ons to tweak Weblate behavior, see [Modules](#).

api

API based on [Django REST framework](#).

auth

Authentication and permissions.

billing

The optional [Facturation](#) module.

checks

Translation string [Quality checks](#) module.

fonts

Font rendering checks module.

formats

File format abstraction layer based on [translate-toolkit](#).

gitexport

The optional [Exportateur Git](#) module.

lang

Module defining language and plural models.

legal

The optional [Mentions légales](#) module.

machinery

Integration of machine translation services.

memory

Built-in translation memory, see [Mémoire de traduction](#).

screenshots

Screenshots management and OCR module.

trans

Main module handling translations.

utils

Various helper utilities.

vcs

Version control system abstraction.

wladmin

Django admin interface customization.

## 3.6 Développement de greffons

*Modules* are way to customize localization workflow in Weblate.

```
class weblate.addons.base.BaseAddon (storage=None)
    Base class for Weblate add-ons.
    classmethod can_install (component, user)
        Check whether add-on is compatible with given component.
    configure (settings)
        Enregistrer la configuration.
    daily (component)
        Hook triggered daily.
    classmethod get_add_form (user, component, **kwargs)
        Return configuration form for adding new add-on.
    get_settings_form (user, **kwargs)
        Return configuration form for this add-on.
    post_add (translation)
        Crochet déclenché lors de l'ajout d'une nouvelle traduction.
    post_commit (component)
        Crochet déclenché après que des modifications aient été archivées dans le dépôt.
    post_push (component)
        Crochet déclenché après que le dépôt est poussé en amont.
    post_update (component, previous_head : str, skip_push : bool)
        Hook triggered after repository is updated from upstream.

    Paramètres
    — previous_head (str) – HEAD of the repository prior to update, can be blank on
        initial clone.
    — skip_push (bool) – Whether the add-on operation should skip pushing changes
        upstream. Usually you can pass this to underlying methods as commit_and_push or
        commit_pending.

    pre_commit (translation, author)
        Crochet déclenché avant que des modifications aient été archivées dans le dépôt.
    pre_push (component)
        Hook triggered before repository is pushed upstream.
    pre_update (component)
        Hook triggered before repository is updated from upstream.
    save_state ()
        Save add-on state information.
    store_post_load (translation, store)
        Crochet déclenché après l'analyse d'un fichier.
        It receives an instance of a file format class as a argument.
        This is useful to modify file format class parameters, for example adjust how the file will be saved.
    unit_pre_create (unit)
        Hook triggered before new unit is created.
```

Here is an example add-on :

```
#
# Copyright © 2012–2022 Michal Čihař <michal@cihar.com>
#
# This file is part of Weblate <https://weblate.org/>
#
# This program is free software: you can redistribute it and/or modify
# it under the terms of the GNU General Public License as published by
# the Free Software Foundation, either version 3 of the License, or
# (at your option) any later version.
```

(suite sur la page suivante)

(suite de la page précédente)

```

#
# This program is distributed in the hope that it will be useful,
# but WITHOUT ANY WARRANTY; without even the implied warranty of
# MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
# GNU General Public License for more details.
#
# You should have received a copy of the GNU General Public License
# along with this program. If not, see <https://www.gnu.org/licenses/>.
#

from django.utils.translation import gettext_lazy as _

from weblate.addons.base import BaseAddon
from weblate.addons.events import EVENT_PRE_COMMIT

class ExampleAddon(BaseAddon):
    # Filter for compatible components, every key is
    # matched against property of component
    compat = {"file_format": {"po", "po-mono"}}
    # List of events add-on should receive
    events = (EVENT_PRE_COMMIT,)
    # Add-on unique identifier
    name = "weblate.example.example"
    # Verbose name shown in the user interface
    verbose = _("Example add-on")
    # Detailed add-on description
    description = _("This add-on does nothing it is just an example.")

    # Callback to implement custom behavior
    def pre_commit(self, translation, author):
        return

```

## 3.7 Interface de Weblate

The frontend is currently built using Bootstrap, jQuery and few third party libraries.

### 3.7.1 Navigateurs pris en charge

Weblate supports the latest, stable releases of all major browsers and platforms.

Alternative browsers which use the latest version of WebKit, Blink, or Gecko, whether directly or via the platform's web view API, are not explicitly supported. However, Weblate should (in most cases) display and function correctly in these browsers as well.

Older browsers might work, but some features might be limited.

### 3.7.2 Gestion des dépendances

The yarn package manager is used to update third party libraries. The configuration lives in `scripts/yarn` and there is a wrapper script `scripts/yarn-update` to upgrade the libraries, build them and copy to correct locations in `weblate/static/vendor`, where all third party frontend code is located. The Weblate specific code should be placed directly in `weblate/static` or feature specific subdirectories (for example `weblate/static/editor`).

Adding new third-party library typically consists of :

```
# Add a yarn package
yarn --cwd scripts/yarn add PACKAGE
# Edit the script to copy package to the static folder
edit scripts/yarn-update
# Run the update script
./scripts/yarn-update
# Add files to git
git add .
```

### 3.7.3 Coding style

Weblate relies on [Prettier](#) for the code formatting for both JavaScript and CSS files.

We also use [ESLint](#) to check the JavaScript code.

### 3.7.4 Traduction

Should you need any user visible text in the frontend code, it should be localizable. In most cases all you need is to wrap your text inside `gettext` function, but there are more complex features available :

```
document.write(gettext('this is to be translated'));

var object_count = 1 // or 0, or 2, or 3, ...
s = ngettext('literal for the singular case',
            'literal for the plural case', object_count);

fmts = ngettext('There is %s object. Remaining: %s',
                'There are %s objects. Remaining: %s', 11);
s = interpolate(fmts, [11, 20]);
// s is 'There are 11 objects. Remaining: 20'
```

**Voir aussi :**

[Translation topic in the Django documentation](#)

### 3.7.5 Icônes

Weblate currently uses material design icons. In case you are looking for new symbol, check [Material Design Icons](#) or [Material Design Resources](#).

Additionally, there is `scripts/optimize-svg` to reduce size of the SVG as most of the icons are embedded inside the HTML to allow styling of the paths.

## 3.8 Reporting issues in Weblate

Le système de suivi de Weblate est hébergé sur GitHub.

Feel welcome to report any issues you have, or suggest improvement for Weblate there. There are various templates prepared to comfortably guide you through the issue report.

If what you have found is a security issue in Weblate, please consult the *Problèmes de sécurité* section below.

If you are not sure about your bug report or feature request, you can try *Weblate discussions*.

### 3.8.1 Problèmes de sécurité

In order to give the community time to respond and upgrade, you are strongly urged to report all security issues privately. HackerOne is used to handle security issues, and can be reported directly at [HackerOne](#). Once you submit it there, community has limited but enough time to solve the incident.

Alternatively, report to [security@weblate.org](mailto:security@weblate.org), which ends up on HackerOne as well.

If you don't want to use HackerOne, for whatever reason, you can send the report by e-mail to [michal@cihar.com](mailto:michal@cihar.com). You can choose to encrypt it using this PGP key *3CB 1DF1 EF12 CF2A C0EE 5A32 9C27 B313 42B7 511D*. You can also get the PGP key from [Keybase](#).

---

**Note :** Weblate depends on third-party components for many things. In case you find a vulnerability affecting one of those components in general, please report it directly to the respective project.

Some of these are :

- [Django](#)
  - [Django REST framework](#)
  - [Python Social Auth](#)
- 

## 3.9 Weblate testsuite and continuous integration

Testsuites exist for most of the current code, increase coverage by adding testcases for any new functionality, and verify that it works.

### 3.9.1 Intégration continue

Current test results can be found on [GitHub Actions](#) and coverage is reported on [Codecov](#).

There are several jobs to verify different aspects :

- Unit tests
- Documentation build and external links
- Migration testing from all supported releases
- Code linting
- Setup verification (ensures that generated dist files do not miss anything and can be tested)

The configuration for the CI is in `.github/workflows` directory. It heavily uses helper scripts stored in `ci` directory. The scripts can be also executed manually, but they require several environment variables, mostly defining Django settings file to use and database connection. The example definition of that is in `scripts/test-database`:

```
# Simple way to configure test database from environment

# Database backend to use postgresql / mysql / mariadb
export CI_DATABASE=${1:-postgresql}
```

(suite sur la page suivante)

(suite de la page précédente)

```
# Database server configuration
export CI_DB_USER=weblate
export CI_DB_PASSWORD=weblate
export CI_DB_HOST=127.0.0.1

# Django settings module to use
export DJANGO_SETTINGS_MODULE=weblate.settings_test
```

The simple execution can look like :

```
. scripts/test-database
./ci/run-migrate
./ci/run-test
./ci/run-docs
```

### 3.9.2 Local testing

To run a testsuite locally, use :

```
DJANGO_SETTINGS_MODULE=weblate.settings_test ./manage.py test
```

---

**Indication :** You will need a database (PostgreSQL) server to be used for tests. By default Django creates separate database to run tests with `test_` prefix, so in case your settings is configured to use `weblate`, the tests will use `test_weblate` database. See *Database setup for Weblate* for setup instructions.

---

The `weblate/settings_test.py` is used in CI environment as well (see *Intégration continue*) and can be tuned using environment variables :

```
# Simple way to configure test database from environment

# Database backend to use postgresql / mysql / mariadb
export CI_DATABASE=${1:-postgresql}

# Database server configuration
export CI_DB_USER=weblate
export CI_DB_PASSWORD=weblate
export CI_DB_HOST=127.0.0.1

# Django settings module to use
export DJANGO_SETTINGS_MODULE=weblate.settings_test
```

Prior to running tests you should collect static files as some tests rely on them being present :

```
DJANGO_SETTINGS_MODULE=weblate.settings_test ./manage.py collectstatic
```

You can also specify individual tests to run :

```
DJANGO_SETTINGS_MODULE=weblate.settings_test ./manage.py test weblate.gitexport
```

---

**Indication :** The tests can also be executed inside developer docker container, see *Running Weblate locally in Docker*.

---

**Voir aussi :**

See *Les tests dans Django* for more info on running and writing tests for Django.



## 3.10 Schémas de données

Weblate utilise [JSON Schema](#) pour définir la disposition des fichiers JSON externes.

### 3.10.1 Schéma de mémoire des traductions Weblate

<a href="https://weblate.org/schemas/weblate-memory.schema.json">https://weblate.org/schemas/weblate-memory.schema.json</a>	
type	<i>tableau</i>
items	<i>Élément de mémoire de traduction</i>
type	<i>objet</i>
properties	
— <b>category</b>	<i>Catégorie de la chaîne</i> 1 = global, 2 = partagé, 10000000 et plus = spécifique à un projet, 20000000 et plus = spécifique à un utilisateur type <i>entier</i> exemples 1 minimum 0 par défaut 1
— <b>origin</b>	<i>Origine de la chaîne</i> Nom de fichier ou nom du composant type <i>chaîne de caractères</i> exemples test.tmx project/component par défaut
— <b>source</b>	<i>Chaîne source</i> type <i>chaîne de caractères</i> exemples Bonjour minLength 1 par défaut
— <b>source_language</b>	<i>Langue source</i> ISO 639-1 / ISO 639-2 / IETF BCP 47 type <i>chaîne de caractères</i> exemples fr motif $^{\wedge}[\wedge]^+ \$$ par défaut
— <b>target</b>	<i>Chaîne cible</i> type <i>chaîne de caractères</i> exemples Ahoj minLength 1 par défaut
— <b>target_language</b>	<i>Langue cible</i> ISO 639-1 / ISO 639-2 / IETF BCP 47 type <i>chaîne de caractères</i> exemples cs motif $^{\wedge}[\wedge]^+ \$$ par défaut
additionalProperties	Faux
definitions	

**Voir aussi :**

*Mémoire de traduction*, *dump\_memory*, *import\_memory*

## 3.10.2 Export des données utilisateur Weblate

<a href="https://weblate.org/schemas/weblate-userdata.schema.json">https://weblate.org/schemas/weblate-userdata.schema.json</a>			
type	objet		
properties			
— basic	De base		
	type	objet	
	properties		
	— username	Nom d'utilisateur	
		type	chaîne de caractères
		exemples	admin
		par défaut	
	— full_name	Nom complet	
		type	chaîne de caractères
		exemples	Administrateur Weblate
		par défaut	
	— email	Adresse courriel	
		type	chaîne de caractères
		exemples	noreply@example.com
		par défaut	
	— date_joined	Date d'adhésion	
		type	chaîne de caractères
		exemples	2019-11-18T18 :53 :54.862Z
		par défaut	
— profile	Profil		
	type	objet	
	properties		
	— language	Langue	
		type	chaîne de caractères
		exemples	cs
		motif	^.*\$
		par défaut	
	— suggested	Nombre de chaînes suggérées	
		type	entier
		exemples	1
		par défaut	0
	— translated	Nombre de chaînes traduites	
		type	entier
		exemples	24
		par défaut	0
	— uploaded	Nombre de captures d'écran téléversées	
		type	entier
		exemples	1
		par défaut	0
	— hide_completed	Masquer les traductions terminées sur le tableau de bord	
		type	booléen
		exemples	Faux
		par défaut	Vrai
	— secondary_in_zen	Afficher les traductions secondaires en mode Zen	
		type	booléen
		exemples	Vrai
		par défaut	Vrai
	— hide_source_secondary	Masquer la source lorsqu'une traduction secondaire existe	
		type	booléen
		exemples	Faux
		par défaut	Vrai

suite sur la page suivante

Tableau 2 – suite de la page précédente

	— editor_link	Lien vers l'éditeur		
		type	chaîne de caractères	
		exemples		
		motif	^.*\$	
		par défaut		
	— trans-late_mode	Mode pour l'éditeur de traductions		
		type	entier	
		exemples	0	
		par défaut	0	
	— zen_mode	Mode Zen		
		type	entier	
		exemples	0	
		par défaut	0	
	— spe-cial_chars	Caractères spéciaux		
		type	chaîne de caractères	
		exemples		
		motif	^.*\$	
		par défaut		
	— dash-board_view	Affichage du tableau de bord par défaut		
		type	entier	
		exemples	1	
		par défaut	0	
	— dash-board_component_list	Liste de composants par défaut		
		type	nul	
		anyOf	type	nul
			type	entier
	— languages	Langues traduites		
		type	tableau	
		par défaut		
		items	Code langue	
			type	chaîne de caractères
			exemples	cs
			motif	^.*\$
			par défaut	
	— secon-dary_languages	Langues secondaires		
		type	tableau	
		par défaut		
		items	Code langue	
			type	chaîne de caractères
			exemples	sk
			motif	^.*\$
			par défaut	
	— watched	Projets surveillés		
		type	tableau	
		par défaut		
		items	Identifiant du projet	
			type	chaîne de caractères
			exemples	weblate
			motif	^.*\$
			par défaut	
	— auditlog	Journal d'audit		
		type	tableau	
		par défaut		
		items	Éléments	
			type	objet
properties				

suite sur la page suivante

Tableau 2 – suite de la page précédente

		— <b>address</b>	<i>Adresse IP</i>	
			type	<i>chaîne de caractères</i>
			exemples	127.0.0.1
			motif	^.*\$
			par défaut	
		— <b>user_agent</b>	<i>User agent</i>	
			type	<i>chaîne de caractères</i>
			exemples	PC / Linux / Firefox 70.0
			motif	^.*\$
			par défaut	
		— <b>timestamp</b>	<i>Horodatage</i>	
			type	<i>chaîne de caractères</i>
			exemples	2019-11-18T18:58:30.845Z
			motif	^.*\$
			par défaut	
		— <b>activity</b>	<i>Activité</i>	
			type	<i>chaîne de caractères</i>
			exemples	connexion
			motif	^.*\$
			par défaut	
definitions				

Voir aussi :

*Profil utilisateur, dumpuserdata*

## 3.11 Publication de Weblate

### 3.11.1 Calendrier de publication

Weblate has two month release cycle for releases (x.y). These are usually followed by a bunch of bugfix releases to fix issues which slip into them (x.y.z).

The change in the major version indicates that the upgrade process can not skip this version - you always have to upgrade to x.0 before upgrading to higher x.y releases.

Voir aussi :

*Mise à niveau de Weblate*

### 3.11.2 Release planning

The features for upcoming releases are collected using GitHub milestones, you can see our roadmap at <<https://github.com/WeblateOrg/weblate/milestones>>.

### 3.11.3 Release process

Choses à vérifier avant publication :

1. Vérifier les langues nouvellement traduites à l'aide de `./scripts/list-translated-languages`.
2. Définir la version finale à l'aide de `./scripts/prepare-release`.
3. Make sure screenshots are up to date `make -j 12 -C docs update-screenshots`.
4. Merge any possibly pending translations `wlc push; git remote update; git merge origin/weblate`

Effectuer la publication :

5. Créer une version `./scripts/create-release --tag` (voir ci-dessous pour les exigences).

Étapes manuelles après publication :

6. Mise à jour de l'image Docker.
7. Fermer le jalon GitHub.
8. Une fois l'image Docker testée, ajouter un libellé, puis pousser la nouvelle version.
9. Mettre à jour le graphique Helm vers la nouvelle version.
10. Inclure la nouvelle version dans `.github/workflows/migrations.yml` pour la couvrir dans les tests de migration.
11. Augmenter la version dans les liens de téléchargement du site Web.
12. Incrémenter le numéro de version dans le dépôt à l'aide de `./scripts/set-version`.

Pour créer des libellés à l'aide du script `./scripts/create-release`, vous avez besoin de éléments suivants :

- GnuPG avec la clé privée utilisée pour signer la version
- Accès pour pousser sur le dépôt Git Weblate (pour pousser les balises)
- L'outil `:command: hub` configuré pour accéder et créer des communiqués sur le dépôt Weblate
- Accès SSH au serveur de téléchargement Weblate (les téléchargements du site Web y sont copiés)

## 3.12 Sécurité et confidentialité

---

**Astuce :** Chez Weblate, la sécurité maintient un environnement qui respecte la vie privée de nos utilisateurs.

---

Development of Weblate adheres to the [Best Practices of the Linux Foundation's Core Infrastructure Initiative](#).

**Voir aussi :**

*Problèmes de sécurité*

### 3.12.1 Tracking dependencies for vulnerabilities

Security issues in our dependencies are monitored using [Dependabot](#). This covers the Python and JavaScript libraries, and the latest stable release has its dependencies updated to avoid vulnerabilities.

---

**Indication :** There might be vulnerabilities in third-party libraries which do not affect Weblate, so those are not addressed by releasing bugfix versions of Weblate.

---

### 3.12.2 Docker container security

The Docker containers are regularly scanned using [Anchore](#) and [Trivy](#) security scanners.

This allows us to detect vulnerabilities early and release improvements quickly.

You can get the results of these scans at GitHub — they are stored as artifacts on our CI in the SARIF format (Static Analysis Results Interchange Format).

**Voir aussi :**

*Intégration continue*

## 3.13 À propos de Weblate

### 3.13.1 Objectifs du projet

Web-based continuous localization tool with tight *Intégration avec le système de contrôle de versions* supporting a wide range of *file formats*, making it easy for translators to contribute.

### 3.13.2 Nom du projet

« Weblate » est un portemanteau des mots « web » et « translate ».

### 3.13.3 Site Web du projet

The landing page is <https://weblate.org> and there is a cloud-hosted service at <https://hosted.weblate.org>. The documentation can be read at <https://docs.weblate.org>.

### 3.13.4 Logos du projet

Les logos et autres éléments graphiques du projet sont disponibles sur <https://github.com/WeblateOrg/graphics>.

### 3.13.5 Direction

Ce projet est maintenu par Michal Čihař, joignable sur [michal@cihar.com](mailto:michal@cihar.com).

### 3.13.6 Auteurs

Weblate a été lancé par Michal Čihař. Depuis sa création en 2012, des milliers de personnes y ont contribué.

## 3.14 Licence

Copyright © 2012–2022 Michal Čihař [michal@cihar.com](mailto:michal@cihar.com)

Ce programme est un logiciel libre : vous pouvez le redistribuer ou le modifier suivant les termes de la GNU General Public License telle que publiée par la Free Software Foundation, soit la version 3 de la licence, soit (à votre gré) toute version ultérieure.

Ce programme est distribué dans l'espoir qu'il sera utile, mais SANS AUCUNE GARANTIE ; sans même la garantie tacite de QUALITÉ MARCHANDE ou d'ADÉQUATION à UN BUT PARTICULIER. Consultez la GNU General Public License pour plus de détails.

Vous devez avoir reçu une copie de la GNU General Public License en même temps que ce programme ; si ce n'est pas le cas, consultez <<https://www.gnu.org/licenses/>>.

---

## Historique des modifications

---

### 4.1 Weblate 4.11

Released on February 25th 2022.

- Fixed add-on installation using API.
- Renamed *Strings needing action* to *Unfinished strings*.
- Fixed false positives from *Syntaxe ICU MessageFormat*.
- Indicate lock and contributor agreement on other occurrences listing.
- Fixed updating PO files with obsolete strings or missing plurals.
- Improved squash add-on compatibility with Gerrit.
- Automatically initialize user languages based on the *Accept-Language* header.
- Improved error handling on string removal.
- Weblate now requires Python 3.7 or newer.
- Fixed some write operations with project token authentication.
- Fixed string state tracking when the strings changes in the repository.
- Suivre les modifications des chaînes de caractères du dépôt.
- Sticky header on translations listing to improve navigation.
- Fixed untranslating strings in *Java properties*.
- Fixed Git operation with non-ascii branch names.
- Nouveau module *Pré-remplir la traduction avec la source*.
- Added *Merge without fast-forward* *Style de fusion*.
- Fixed *Traduction automatique* add-on trigger on newly added strings.
- Improved punctuation checks for Burmese.
- Added support for defining custom teams at project level to grant users access, see *Gestion du contrôle d'accès par projet*.
- Added documentation links to alerts.
- Docker container automatically enables TLS/SSL for outgoing e-mail when needed.
- Added support for searching for resolved comments.
- Added support for borgbackup 1.2.
- Fixed applying of *Automatically translated* label.



## 4.2 Weblate 4.10.1

Version publiée le 22 décembre 2021.

- Documented changes introduced by upgrading to Django 4.0.
- Fixed displaying of *Automatically translated* label.
- Fixed API display of branch in components with a shared repository.
- Improved analysis on the failed push alert.
- Fixed manually editing page when browsing changes.
- Amélioration de la précision de *Présence d'un caractère kashida*.
- The Weblate Docker container now uses Python 3.10.

## 4.3 Weblate 4.10

Version publiée le 16 décembre 2021.

- Added support for formality and placeholders with DeepL.
- Bulk edit and search and replace are now available on project and language level.
- Added filtering to search and replace.
- Fixed : « Perform automatic translation » privilege is no longer part of the *Languages* group.
- « Perform automatic translation » is in the *Administration* and the new *Automatic translation* group.
- Fixed generating XLSX files with special chars.
- Added ability to the GitHub authentication backend to check if the user belongs to a specific GitHub organization or team.
- Improved feedback on invalid parameters passed to API.
- Added support for project scoped access tokens for API.
- Fixed string removal in some cases.
- Fixed translating newly added strings.
- Label automatically translated strings to ease their filtering.

Toutes les modifications en détail.

## 4.4 Weblate 4.9.1

Version publiée le 19 novembre 2021.

- Fixed upload of monolingual files after changing template.
- Improved handling of whitespace in flags.
- Add support for filtering in download API.
- Fixed statistics display when adding new translations.
- Mitigate issues with GitHub SSH key change.

All changes in detail.

## 4.5 Weblate 4.9

Version publiée le 10 novembre 2021.

- Provide more details for events in history.
- Improved rendering of history.
- Improved performance of the translation pages.
- Added support for restricting translation file downloads.
- The `safe-html` can now understand Markdown when used with `md-text`.
- The `max-length` tag now ignores XML markup when used with `xml-text`.
- Fixed dimensions of rendered texts in *Taille maximale de la traduction*.
- Lowered app store title length to 30 to assist with upcoming Google policy changes.
- Added support for customizing SSH invocation via `SSH_EXTRA_ARGS`.
- Ajout de vérifications pour ICU MessageFormat.

- Improved error condition handling in machine translation backends.
- Highlight unusual whitespace characters in the strings.
- Added option to stay on translated string while editing.
- Added support for customizing Borg invocation via `BORG_EXTRA_ARGS`.
- Fixed generating of MO files for monolingual translations.
- Added API endpoint to download all component translations as a ZIP file.
- Added support for Python 3.10.
- Added support for resending e-mail invitation from the management interface.

[All changes in detail.](#)

## 4.6 Weblate 4.8.1

Version publiée le 10 septembre 2021.

- Fixed user removal in Django admin interface.
- Document add-on parameters in greater detail.
- Fixed JavaScript error in glossary.
- Add limit to number of matches in consistency check.
- Improve handling of placeholders in machine translations.
- Fixed creating add-ons using API.
- Added `PRIVACY_URL` setting to add privacy policy link to the footer.
- Hide member e-mail addresses from project admins.
- Improved gettext PO merging in case of conflicts.
- Improved glossary highlighting.
- Improved `safe-html` flag behavior with XML checks.
- Fixed commit messages for linked components.

[All changes in detail.](#)

## 4.7 Weblate 4.8

Version publiée le 21 août 2021.

- Added support for Apple stringsdict format.
- The exact search operator is now case-sensitive with PostgreSQL.
- Fixed saving glossary explanations in some cases.
- Améliorations de la documentation.
- Amélioration des performances.
- Improved squash add-on compatibility with Gerrit.
- Fixed adding strings to monolingual glossary components.
- Improved performance in handling variants.
- Fixed squash add-on sometimes skipping parsing upstream changes.
- Preserve file extension for downloads.
- Added support for the Fluent format.
- Added support for using tabs to indent JSON formats.

[All changes in detail.](#)

## 4.8 Weblate 4.7.2

Version publiée le 15 juillet 2021.

- Support more language aliases to be configured on a project.
- Fixed search string validation in API.
- Fixed Git exporter URLs after a domain change.
- Fixed cleanup add-on for Windows RC files.
- Fixed possible crash in XLIFF updating.

[All changes in detail.](#)

## 4.9 Weblate 4.7.1

Version publiée le 30 juin 2021.

- Improved popup for adding terms to glossary.
- Added support for LibreTranslate machine translation service.
- Added rate limiting on creating new projects.
- Improved performance of file updates.

[All changes in detail.](#)

## 4.10 Weblate 4.7

Version publiée le 17 juin 2021.

- Improved configuration health check.
- Added support for `object-pascal-format` used in gettext PO, see *Format Pascal objet*.
- Renamed *Nearby keys* to *Similar keys* to better describe the purpose.
- Added support for *mi18n lang files*.
- Improved SAML authentication integration.
- Fixed *Gerrit* integration to better handle corner cases.
- Weblate now requires Django 3.2.
- Fixed inviting users when e-mail authentication is disabled.
- Improved language definitions.
- Added support for blocking users from contributing to a project.
- Fixed automatic creation of glossary languages.
- Extended documentation about add-ons.
- Performance improvements for components with linked repositories.
- Added support for free DeepL API.
- The user management no longer needs Django admin interface.

[All changes in detail.](#)

## 4.11 Weblate 4.6.2

Version publiée le 8 mai 2021.

- Fixed crash after moving shared component between projects.
- Fixed adding new strings to empty properties files.
- Fixed copy icon alignment in RTL languages.
- Extended string statistics on the Info tab.
- Fixed handling of translation files ignored in Git.
- Improved metrics performance.
- Fixed possible bug in saving glossaries.
- Fixed consistency check behavior on languages with different plural rules.

[Tous les changements en détail.](#)

## 4.12 Weblate 4.6.1

Version publiée le 2 mai 2021.

- Remove obsolete spam protection code.
- Improve source plural check accuracy.
- Update list of user interface languages in Docker.
- Improved error messages when creating pull requests.
- Fixed creating pull requests on Pagure.
- Fixed triggering automatically installed add-ons.
- Fixed possible caching issues on upgrade.
- Fixed adding new units to monolingual translations using upload.

[All changes in detail.](#)

## 4.13 Weblate 4.6

Version publiée le 19 avril 2021.

- The `auto_translate` management command has now a parameter for specifying translation mode.
- Added support for *Fichiers texte*.
- Added trends and metrics for all objects.
- Added support for directly copying text from secondary languages.
- Added date filtering when browsing changes.
- Amélioration des graphiques d'activité.
- Sender for contact form e-mails can now be configured.
- Improved parameters validation in component creation API.
- The rate limiting no longer applies to superusers.
- Improved automatic translation add-on performance and reliability.
- The rate limiting now can be customized in the Docker container.
- API for creating components now automatically uses *Weblate internal URLs*.
- Simplified state indication while listing strings.
- Password hashing now uses Argon2 by default.
- Barres de progression simplifiées indiquant l'état de la traduction.
- Renamed *Ajouter les langues manquantes* to clarify the purpose.
- Fixed saving string state to XLIFF.
- Added language-wide search.
- Initial support for *Scaling horizontally* the Docker deployment.

[All changes in detail.](#)

## 4.14 Weblate 4.5.3

Version publiée le 1 avril 2021.

- Fixed metrics collection.
- Fixed possible crash when adding strings.
- Improved search query examples.
- Fixed possible loss of newly added strings on replace upload.

## 4.15 Weblate 4.5.2

Version publiée le 26 mars 2021.

- Date configurable pour la traduction automatique.
- Added Lua format check.
- Ignore format strings in the *Répétition de mots* check.
- Allow uploading screenshot from a translate page.
- Added forced file synchronization to the repository maintenance.
- Fixed automatic suggestions for languages with a longer code.
- Improved performance when adding new strings.
- Several bug fixes in quality checks.
- Several performance improvements.
- Ajout de l'intégration avec *Découverte Weblate*.
- Fixed checks behavior with read-only strings.

[All changes in detail.](#)

## 4.16 Weblate 4.5.1

Version publiée le 5 mars 2021.

- Fixed editing of glossary flags in some corner cases.
- Extend metrics usage to improve performance of several pages.
- Store correct source language in TMX files.
- Better handling for uploads of monolingual PO using API.
- Improved alerts behavior on glossary components.
- Improved Markdown link checks.
- Indicate glossary and source language in breadcrumbs.
- Pagination des composants pour les grands projets.
- Improved performance of translation, component or project removal.
- Improved bulk edit performance.
- Fixed preserving « Needs editing » and « Approved » states for ODF files.
- Amélioration de l'interface pour la personnalisation des téléchargements de fichiers de traduction

[All changes in detail.](#)

## 4.17 Weblate 4.5

Version publiée le 19 février 2021.

- Prise en charge de ``lua-format`` utilisé dans les fichiers PO gettext.
- Prise en charge du partage de composants entre projets.
- Correction du comportement du contrôle de variables multiples non nommées avec des drapeaux de format multiples.
- Dropped mailing list field on the project in favor of generic instructions for translators.
- Added pseudolocale generation add-on.
- Added support for TermBase eXchange files.
- Prise en charge de la définition manuelle de variantes de chaîne à l'aide d'un indicateur.
- Amélioration des performances des contrôles de cohérence.
- Improved performance of translation memory for long strings.
- Prise en charge de la recherche dans les explications.
- Strings can now be added and removed in bilingual formats as well.
- Extend list of supported languages in Amazon Translate machine translation.
- Automatically enable Java MessageFormat checks for Java Properties.
- Added a new upload method to add new strings to a translation.
- Added a simple interface to browse translation.
- Glossaries are now stored as regular components.
- Dropped specific API for glossaries as component API is used now.

- Added simplified interface to toggle some of the flags.
- Added support for non-translatable or forbidden terms in the glossary.
- Added support for defining terminology in a glossary.
- Moved text direction toggle to get more space for the visual keyboard.
- Ajout d'une option permettant de surveiller automatiquement les projets auxquels l'utilisateur contribue.
- Added check whether translation matches the glossary.
- Added support for customizing navigation text color.

[All changes in detail.](#)

## 4.18 Weblate 4.4.2

Version publiée le 14 janvier 2021.

- Correction des corruptions lors de l'utilisation d'un fichier MO distribué unique.

## 4.19 Weblate 4.4.1

Version publiée le 13 janvier 2021.

- Correction de l'annulation des changements sur les pluriels.
- Correction de l'affichage de l'aide des paramètres des projets.
- Amélioration de l'administration des utilisateurs.
- Amélioration du traitement du contexte dans les fichiers PO unilingues.
- Fixed cleanup add-on behavior with HTML, ODF, IDML and Windows RC formats.
- Correction de l'analyse des emplacements dans les fichiers CSV.
- Utilisation de la compression du contenu pour le téléchargement des fichiers.
- Amélioration de l'expérience utilisation lors de l'importation de fichiers ZIP.
- Amélioration de détection de type de fichier pour les téléversements.
- Correction pour éviter la duplication de demande de tirage sur Pagure.
- Amélioration des performances lors de l'affichage des traductions fantômes.
- Réimplémentation de l'éditeur de traduction pour utiliser les zones de texte natives du navigateur.
- Fixed cleanup add-on breaking adding new strings.
- Added API for add-ons.

[All changes in detail.](#)

## 4.20 Weblate 4.4

Version publiée le 15 décembre 2020.

- Amélioration de la validation lors de la création d'un composant.
- Weblate nécessite désormais Django 3.1.
- Prise en charge de la personnalisation de l'apparence de l'interface de gestion.
- Correction de la gestion de l'état de lecture seule lors de la modification en masse.
- Amélioration de l'intégration avec CodeMirror.
- Added add-on to remove blank strings from translation files.
- L'éditeur CodeMirror est maintenant utilisé pour les traductions.
- Mise en évidence de la syntaxe dans l'éditeur de traduction pour XML, HTML, Markdown et reStructured-Text.
- Mettre en surbrillance les placeables dans l'éditeur de traduction.
- Amélioration de la prise en charge des codes linguistiques non standard.
- Ajout d'une alerte lors de l'utilisation de codes de langue ambigus.
- L'utilisateur se voit maintenant présenter une liste filtrée de langues lors de l'ajout d'une nouvelle traduction.
- Capacités de recherche étendues pour les changements dans l'historique.
- Improved billing detail pages and Libre hosting workflow.
- API des statistiques de traduction étendue.
- Amélioration de l'onglet « Autres langues » lors de la traduction.

- Ajout d'une API pour les tâches.
- Amélioration des performances du téléversement de fichier.
- Amélioration de l'affichage des caractères spéciaux définis par l'utilisateur.
- Amélioration des performances de la traduction automatique.
- Plusieurs améliorations mineures de l'interface utilisateur.
- Amélioration du nom des fichiers ZIP téléchargés.
- Ajout d'une option pour recevoir des notifications sur les projets non surveillés.

[All changes in detail.](#)

## 4.21 Weblate 4.3.2

Version publiée le 4 novembre 2020.

- Fixed crash on certain component file masks.
- Amélioration de la précision de la vérification des mots consécutifs dupliqués.
- Ajout de la prise en charge des demandes de fusion Pagure.
- Amélioration des messages d'erreur pour les inscriptions échouées.
- Annulation du changement qui affichait les commentaires du développeur en Markdown.
- Simplification de la configuration des dépôts Git avec une branche par défaut différente de « master ».
- Les dépôts internes nouvellement créés utilisent maintenant « main » comme branche par défaut.
- Réduction du taux de faux positifs pour les traductions inchangées lors de la traduction de reStructuredText.
- Correction de problèmes d'affichage de CodeMirror dans certaines situations.
- Renommage du groupe Modèle en « Sources » pour clarifier sa signification.
- Correction des demandes de tirage GitLab sur les dépôts ayant des chemins d'accès longs.

[All changes in detail.](#)

## 4.22 Weblate 4.3.1

Version publiée le 21 octobre 2020.

- Amélioration des performances de la traduction automatique.
- Correction de l'expiration de la session pour les utilisateurs authentifiés.
- Prise en charge du masquage des informations de version.
- Amélioration de la compatibilité des crochets avec Bitbucket Server.
- Amélioration des performances pour la mise à jour des mémoires de traduction.
- Réduction de l'utilisation mémoire.
- Amélioration des performances de la vue matricielle.
- Ajout d'une confirmation avant de retirer un utilisateur d'un projet.

[All changes in detail.](#)

## 4.23 Weblate 4.3

Version publiée le 15 octobre 2020.

- Inclusion des statistiques utilisateur dans l'API.
- Correction de l'ordre des composants sur les pages paginées.
- Définition des langues sources pour un glossaire.
- Réécriture de la prise en charge des demandes de tirage de GitHub et GitLab.
- Correction des statistiques après la suppression de suggestions.
- Extension des profils d'utilisateur publics.
- Correction de la configuration des contrôles de qualité forcés.
- Amélioration de la documentation à propos des sauvegardes intégrées.
- Déplacement de l'attribut de langue source d'un projet vers un composant.
- Ajout du contrôle du formatage Vue I18n.

- Prise en charge des expressions rationnelles pour les contrôles de qualité des balises de remplacement.
- Amélioration de l'aspect du mode matriciel.
- Traduction automatique est maintenant appelé Suggestions automatiques.
- Ajout de la prise en charge de l'interaction avec plusieurs instances GitLab ou GitHub.
- Extension de l'API pour couvrir les mises à jour de projets et d'unités, les suppressions, ainsi que le glossaire.
- L'API d'unité prend désormais en charge les chaînes plurielles.
- Les composants peuvent maintenant être créés en téléversant des fichiers ZIP ou des documents.
- Consolidation des codes de statut de réponse de l'API.
- Prise en charge du Markdown dans l'accord de contribution.
- Amélioration du suivi des chaînes sources.
- Amélioration de la compatibilité avec les formats JSON, YAML et CSV.
- Ajout de la prise en charge des suppressions de chaînes.
- Amélioration des performances des téléchargements de fichiers.
- Amélioration de la vue de gestion des dépôts.
- Activation automatique du format java pour Android.
- Ajout de la prise en charge des captures d'écran traduites.
- Ajout de la prise en charge de Python 3.9.
- Correction de la traduction des fichiers HTML sous certaines conditions.

[All changes in detail.](#)

## 4.24 Weblate 4.2.2

Version publiée le 2 septembre 2020.

- Correction de la correspondance des chaînes source pour les formats JSON.
- Correction de la redirection de la connexion pour certaines configurations d'authentification.
- Correction de l'authentification LDAP avec synchronisation de groupe.
- Correction d'un dysfonctionnement dans la notification d'avancement des traductions automatiques.
- Correction des écrasements des archivages Git lorsque les « trailers » sont activés.
- Correction de la création de composants de système de contrôle des versions local à l'aide de l'API.

## 4.25 Weblate 4.2.1

Version publiée le 21 août 2020.

- Correction de la sauvegarde des pluriels pour certaines langues dans les ressources Android.
- Fixed crash in the cleanup add-on for some XLIFF files.
- Ajout de la possibilité de configurer le CDN de localisation dans l'image Docker.

## 4.26 Weblate 4.2

Version publiée le 18 août 2020.

- Amélioration des pages utilisateurs et ajout d'une liste d'utilisateurs.
- Suppression de la prise en charge des migrations depuis les versions 3.x, migrez en passant par les versions 4.1 ou 4.0.
- Ajout de l'exportation dans plusieurs formats monolingues.
- Amélioration des graphiques d'activité.
- Le nombre de chaînes à proximité affiché peut être configuré.
- Prise en charge du verrouillage des composants qui rencontrent des erreurs de dépôt.
- Simplification de la navigation principale (remplacement des boutons par des icônes).
- Amélioration de la gestion des codes de langues dans l'intégration de Google Translate.
- The Git squash add-on can generate Co-authored-by: trailers.
- Amélioration de l'analyseur de requêtes de recherche.
- Amélioration du retour d'information utilisateur pour les contrôles de format des chaînes.
- Amélioration des performances des modifications en masse.



- Ajout de redirections de compatibilité après renommage d'un projet ou d'un composant.
- Ajout de notifications pour les approbations de chaînes, les verrouillages de composants et les changements de licence.
- Ajout de la prise en charge de ModernMT.
- Ajout d'une fonction permettant d'éviter l'écrasement des traductions approuvées lors du téléversement de fichiers.
- Suppression de la prise en charge de certaines redirections d'URL de compatibilité.
- Ajout d'une vérification pour les ECMAScript template literals.
- Ajout d'une option pour surveiller un composant.
- Suppression du point final dans les clés d'unité JSON.
- Suppression de la file d'attente séparée de Celery pour le mémoire de traduction.
- Permet de traduire tous les composants d'une langue à la fois.
- Ajout d'une option permettant la configuration des en-têtes HTTP `Content-Security-Policy`.
- Ajout de la prise en charge de l'aliasing des langues au niveau du projet.
- New add-on to help with HTML or JavaScript localization, see *JavaScript localisation CDN*.
- Le domaine Weblate est maintenant configuré dans les paramètres, voir *SITE\_DOMAIN*.
- Prise en charge de la recherche par composant et par projet.

## 4.27 Weblate 4.1.1

Version publiée le 19 juin 2020.

- Fixed changing autofix or add-ons configuration in Docker.
- Fixed possible crash in « About » page.
- Improved installation of byte-compiled locale files.
- Fixed adding words to glossary.
- Fixed keyboard shortcuts for machinery.
- Removed debugging output causing discarding log events in some setups.
- Fixed lock indication on project listing.
- Fixed listing GPG keys in some setups.
- Added option for which DeepL API version to use.
- Added support for acting as SAML Service Provider, see *S'authentifier avec SAML*.

## 4.28 Weblate 4.1

Version publiée le 15 juin 2020.

- Added support for creating new translations with included country code.
- Added support for searching source strings with screenshot.
- Extended info available in the stats insights.
- Improved search editing on « Translate » pages.
- Improve handling of concurrent repository updates.
- Include source language in project creation form.
- Include changes count in credits.
- Fixed UI language selection in some cases.
- Allow to whitelist registration methods with registrations closed.
- Improved lookup of related terms in glossary.
- Improved translation memory matches.
- Group same machinery results.
- Add direct link to edit screenshot from translate page.
- Improved removal confirmation dialog.
- Include templates in ZIP download.
- Add support for Markdown and notification configuration in announcements.
- Extended details in check listings.
- Added support for new file formats : *Chaînes de caractères PHP Laravel, HTML files, OpenDocument Format, IDML Format, Windows RC files, INI translations, Traduction des fichier INI InnoSetup, Propriétés GWT, go-i18n JSON files, ARB File.*

- Consistently use dismissed as state of dismissed checks.
- Add support for configuring default add-ons to enable.
- Fixed editor keyboard shortcut to dismiss checks.
- Improved machine translation of strings with placeholders.
- Show ghost translation for user languages to ease starting them.
- Improved language code parsing.
- Show translations in user language first in the list.
- Renamed shapings to more generic name variants.
- Added new quality checks : *Multiples variables non nommées*, *Ancienne chaîne non traduite*, *Répétition de mots*.
- Reintroduced support for wiping translation memory.
- Fixed option to ignore source checks.
- Added support for configuring different branch for pushing changes.
- API now reports rate limiting status in the HTTP headers.
- Added support for Google Translate V3 API (Advanced).
- Added ability to restrict access on component level.
- Added support for whitespace and other special chars in translation flags, see *Customizing behavior using flags*.
- Always show rendered text check if enabled.
- API now supports filtering of changes.
- Added support for sharing glossaries between projects.

## 4.29 Weblate 4.0.4

Version publiée le 7 mai 2020.

- Fixed testsuite execution on some Python 3.8 environments.
- Typo fixes in the documentation.
- Fixed creating components using API in some cases.
- Fixed JavaScript errors breaking mobile navigation.
- Fixed crash on displaying some checks.
- Fixed screenshots listing.
- Fixed monthly digest notifications.
- Fixed intermediate translation behavior with units non existing in translation.

## 4.30 Weblate 4.0.3

Version publiée le 2 mai 2020.

- Fixed possible crash in reports.
- User mentions in comments are now case insensitive.
- Fixed PostgreSQL migration for non superusers.
- Fixed changing the repository URL while creating component.
- Fixed crash when upstream repository is gone.

## 4.31 Weblate 4.0.2

Version publiée le 27 avril 2020.

- Improved performance of translation stats.
- Improved performance of changing labels.
- Improved bulk edit performance.
- Improved translation memory performance.
- Fixed possible crash on component deletion.
- Fixed displaying of translation changes in some corner cases.
- Improved warning about too long celery queue.
- Fixed possible false positives in the consistency check.

- Fixed deadlock when changing linked component repository.
- Included edit distance in changes listing and CSV and reports.
- Avoid false positives of punctuation spacing check for Canadian French.
- Fixed XLIFF export with placeholders.
- Fixed false positive with zero width check.
- Improved reporting of configuration errors.
- Fixed bilingual source upload.
- Automatically detect supported languages for DeepL machine translation.
- Fixed progress bar display in some corner cases.
- Fixed some checks triggering on non translated strings.

## 4.32 Weblate 4.0.1

Version publiée le 16 avril 2020.

- Fixed package installation from PyPI.

## 4.33 Weblate 4.0

Version publiée le 16 avril 2020.

- Weblate now requires Python 3.6 or newer.
- Added management overview of component alerts.
- Added component alert for broken repository browser URLs.
- Improved sign in and registration pages.
- Project access control and workflow configuration integrated to project settings.
- Added check and highlighter for i18next interpolation and nesting.
- Added check and highlighter for percent placeholders.
- Afficher les suggestions échouant aux contrôles.
- Record source string changes in history.
- Upgraded Microsoft Translator to version 3 API.
- Reimplemented translation memory backend.
- Added support for several `is`: lookups in *Recherche*.
- Allow to make *Traduction inchangée* avoid internal blacklist.
- Improved comments extraction from monolingual po files.
- Renamed whiteboard messages to announcements.
- Fixed occasional problems with registration mails.
- Improved LINGUAS update add-on to handle more syntax variants.
- Fixed editing monolingual XLIFF source file.
- Added support for exact matching in *Recherche*.
- Extended API to cover screenshots, users, groups, componentlists and extended creating projects.
- Add support for source upload on bilingual translations.
- Added support for intermediate language from developers.
- Added support for source strings review.
- Extended download options for platform wide translation memory.

## 4.34 Weblate 3.x

### 4.34.1 Weblate 3.11.3

Version publiée le 11 mars 2020.

- Fixed searching for fields with certain priority.
- Fixed predefined query for recently added strings.
- Fixed searching returning duplicate matches.
- Fixed notifications rendering in Gmail.
- Fixed reverting changes from the history.
- Added links to events in digest notifications.
- Fixed email for account removal confirmation.
- Added support for Slack authentication in Docker container.
- Avoid sending notifications for not subscribed languages.
- Include Celery queues in performance overview.
- Fixed documentation links for add-ons.
- Reduced false negatives for unchanged translation check.
- Raised bleach dependency to address CVE-2020-6802.
- Fixed listing project level changes in history.
- Fixed stats invalidation in some corner cases.
- Fixed searching for certain string states.
- Improved format string checks behavior on missing percent.
- Fixed authentication using some third party providers.

### 4.34.2 Weblate 3.11.2

Version publiée le 22 février 2020.

- Fixed rendering of suggestions.
- Fixed some strings wrongly reported as having no words.

### 4.34.3 Weblate 3.11.1

Version publiée le 20 février 2020.

- Documented Celery setup changes.
- Improved filename validation on component creation.
- Fixed minimal versions of some dependencies.
- Fixed adding groups with certain Django versions.
- Fixed manual pushing to upstream repository.
- Improved glossary matching.

### 4.34.4 Weblate 3.11

Version publiée le 17 février 2020.

- Allow using VCS push URL during component creation via API.
- Rendered width check now shows image with the render.
- Fixed links in notifications e-mails.
- Improved look of plaintext e-mails.
- Display ignored checks and allow to make them active again.
- Display nearby keys on monolingual translations.
- Prise en charge du regroupement des formes de chaînes.
- Recommend upgrade to new Weblate versions in the system checks.
- Provide more detailed analysis for duplicate language alert.
- Include more detailed license info on the project pages.
- Automatically unshallow local copies if needed.

- Fixed download of strings needing action.
- New alert to warn about using the same file mask twice.
- Improve XML placeables extraction.
- The *SINGLE\_PROJECT* can now enforce redirection to chosen project.
- Added option to resolve comments.
- Ajout de la modification en masse des drapeaux.
- Added support for labels.
- Added bulk edit add-on.
- Added option for *Exécution des contrôles*.
- Increased default validity of confirmation links.
- Improved Matomo integration.
- Fixed *A déjà été traduit* to correctly handle source string change.
- Extended automatic updates configuration by *AUTO\_UPDATE*.
- LINGUAS add-ons now do full sync of translations in Weblate.

### 4.34.5 Weblate 3.10.3

Version publiée le 18 janvier 2020.

- Support for translate-toolkit 2.5.0.

### 4.34.6 Weblate 3.10.2

Version publiée le 18 janvier 2020.

- Add lock indication to projects.
- Fixed CSS bug causing flickering in some web browsers.
- Fixed searching on systems with non-English locales.
- Improved repository matching for GitHub and Bitbucket hooks.
- Fixed data migration on some Python 2.7 installations.
- Allow configuration of Git shallow cloning.
- Improved background notification processing.
- Fixed broken form submission when navigating back in web browser.
- New add-on to configure YAML formatting.
- Fixed same plurals check to not fire on single plural form languages.
- Fixed regex search on some fields.

### 4.34.7 Weblate 3.10.1

Version publiée le 9 janvier 2020.

- Extended API with translation creation.
- Fixed several corner cases in data migrations.
- Compatibility with Django 3.0.
- Amélioration des performances lors du nettoyage des données.
- Added support for customizable security.txt.
- Improved breadcrumbs in changelog.
- Improved translations listing on dashboard.
- Improved HTTP responses for webhooks.
- Added support for GitLab merge requests in Docker container.

#### 4.34.8 Weblate 3.10

Version publiée le 20 décembre 2019.

- Improved application user interface.
- Added doublespace check.
- Fixed creating new languages.
- Avoid sending auditlog notifications to deleted e-mails.
- Added support for read-only strings.
- Added support for Markdown in comments.
- Allow placing translation instruction text in project info.
- Add copy to clipboard for secondary languages.
- Improved support for Mercurial.
- Improved Git repository fetching performance.
- Add search lookup for age of string.
- Show source language for all translations.
- Show context for nearby strings.
- Added support for notifications on repository operations.
- Improved translation listings.
- Extended search capabilities.
- Added support for automatic translation strings marked for editing.
- Avoid sending duplicate notifications for linked component alerts.
- Improve default merge request message.
- Better indicate string state in Zen mode.
- Added support for more languages in Yandex Translate.
- Improved look of notification e-mails.
- Provide choice for translation license.

#### 4.34.9 Weblate 3.9.1

Version publiée le 28 octobre 2019.

- Remove some unneeded files from backups.
- Fixed potential crash in reports.
- Fixed cross database migration failure.
- Added support for force pushing Git repositories.
- Reduced risk of registration token invalidation.
- Fixed account removal hitting rate limiter.
- Added search based on priority.
- Fixed possible crash on adding strings to JSON file.
- Safe HTML check and fixup now honor source string markup.
- Avoid sending notifications to invited and deleted users.
- Fix SSL connection to redis in Celery in Docker container.

#### 4.34.10 Weblate 3.9

Version publiée le 15 octobre 2019.

- Include Weblate metadata in downloaded files.
- Improved UI for failing checks.
- Indicate missing strings in format checks.
- Separate check for French punctuation spacing.
- Add support for fixing some of quality checks errors.
- Add separate permission to create new projects.
- Extend stats for char counts.
- Improve support for Java style language codes.
- Added new generic check for placeholders.
- Added support for WebExtension JSON placeholders.
- Added support for flat XML format.

- Extended API with project, component and translation removal and creation.
- Added support for Gitea and Gitee webhooks.
- Added new custom regex based check.
- Allow to configure contributing to shared translation memory.
- Added ZIP download for more translation files.
- Make XLIFF standard compliant parsing of maxwidth and font.
- Added new check and fixer for safe HTML markup for translating web applications.
- Add component alert on unsupported configuration.
- Added automatic translation add-on to bootstrap translations.
- Extend automatic translation to add suggestions.
- Display add-on parameters on overview.
- Sentry is now supported through modern Sentry SDK instead of Raven.
- Changed example settings to be better fit for production environment.
- Added automated backups using BorgBackup.
- Split cleanup add-on for RESX to avoid unwanted file updates.
- Added advanced search capabilities.
- Allow users to download their own reports.
- Added localization guide to help configuring components.
- Added support for GitLab merge requests.
- Improved display of repository status.
- Perform automated translation in the background.

### 4.34.11 Weblate 3.8

Version publiée le 15 août 2019.

- Added support for simplified creating of similar components.
- Added support for parsing translation flags from the XML based file formats.
- Log exceptions into Celery log.
- Improve performance of repository scoped add-ons.
- Improved look of notification e-mails.
- Fixed password reset behavior.
- Improved performance on most of translation pages.
- Fixed listing of languages not known to Weblate.
- Add support for cloning add-ons to discovered components.
- Add support for replacing file content with uploaded.
- Add support for translating non VCS based content.
- Added OpenGraph widget image to use on social networks.
- Added support for animated screenshots.
- Improved handling of monolingual XLIFF files.
- Avoid sending multiple notifications for single event.
- Add support for filtering changes.
- Extended predefined periods for reporting.
- Added webhook support for Azure Repos.
- New opt-in notifications on pending suggestions or untranslated strings.
- Add one click unsubscribe link to notification e-mails.
- Fixed false positives with Has been translated check.
- New management interface for admins.
- String priority can now be specified using flags.
- Added language management views.
- Add checks for Qt library and Ruby format strings.
- Added configuration to better fit single project installations.
- Notify about new string on source string change on monolingual translations.
- Added separate view for translation memory with search capability.

### 4.34.12 Weblate 3.7.1

Version publiée le 28 juin 2019.

- Modifications de la documentation.
- Fixed some requirements constraints.
- Updated language database.
- Mises à jour de localisation.
- Various user interface tweaks.
- Improved handling of unsupported but discovered translation files.
- More verbosely report missing file format requirements.

### 4.34.13 Weblate 3.7

Version publiée le 21 juin 2019.

- Added separate Celery queue for notifications.
- Use consistent look with application for API browsing.
- Include approved stats in the reports.
- Report progress when updating translation component.
- Allow to abort running background component update.
- Extend template language for filename manipulations.
- Use templates for editor link and repository browser URL.
- Indicate max length and current characters count when editing translation.
- Improved handling of abbreviations in unchanged translation check.
- Refreshed landing page for new contributors.
- Add support for configuring msgmerge add-on.
- Delay opening SMTP connection when sending notifications.
- Improved error logging.
- Allow custom location in MO generating add-on.
- Added add-ons to cleanup old suggestions or comments.
- Added option to enable horizontal mode in the Zen editor.
- Improved import performance with many linked components.
- Fixed examples installation in some cases.
- Improved rendering of alerts in changes.
- Added new horizontal stats widget.
- Improved format strings check on plurals.
- Added font management tool.
- New check for rendered text dimensions.
- Added support for subtitle formats.
- Include overall completion stats for languages.
- Added reporting at project and global scope.
- Improved user interface when showing translation status.
- New Weblate logo and color scheme.
- New look of bitmap badges.

### 4.34.14 Weblate 3.6.1

Version publiée le 26 avril 2019.

- Improved handling of monolingual XLIFF files.
- Fixed digest notifications in some corner cases.
- Fixed add-on script error alert.
- Fixed generating MO file for monolingual PO files.
- Fixed display of uninstalled checks.
- Indicate administered projects on project listing.
- Allow update to recover from missing VCS repository.



### 4.34.15 Weblate 3.6

Version publiée le 20 avril 2019.

- Add support for downloading user data.
- Add-ons are now automatically triggered upon installation.
- Improved instructions for resolving merge conflicts.
- Cleanup add-on is now compatible with app store metadata translations.
- Configurable language code syntax when adding new translations.
- Warn about using Python 2 with planned termination of support in April 2020.
- Extract special characters from the source string for visual keyboard.
- Extended contributor stats to reflect both source and target counts.
- Admins and consistency add-ons can now add translations even if disabled for users.
- Fixed description of toggle disabling `Language-Team` header manipulation.
- Notify users mentioned in comments.
- Removed file format autodetection from component setup.
- Fixed generating MO file for monolingual PO files.
- Added digest notifications.
- Added support for muting component notifications.
- Added notifications for new alerts, whiteboard messages or components.
- Notifications for administered projects can now be configured.
- Improved handling of three letter language codes.

### 4.34.16 Weblate 3.5.1

Version publiée le 10 mars 2019.

- Fixed Celery systemd unit example.
- Fixed notifications from HTTP repositories with login.
- Fixed race condition in editing source string for monolingual translations.
- Include output of failed add-on execution in the logs.
- Improved validation of choices for adding new language.
- Allow to edit file format in component settings.
- Update installation instructions to prefer Python 3.
- Performance and consistency improvements for loading translations.
- Make Microsoft Terminology service compatible with current Zeep releases.
- Mises à jour de localisation.

### 4.34.17 Weblate 3.5

Version publiée le 3 mars 2019.

- Improved performance of built-in translation memory.
- Added interface to manage global translation memory.
- Improved alerting on bad component state.
- Added user interface to manage whiteboard messages.
- Add-on commit message now can be configured.
- Reduce number of commits when updating upstream repository.
- Fixed possible metadata loss when moving component between projects.
- Improved navigation in the Zen mode.
- Added several new quality checks (Markdown related and URL).
- Added support for app store metadata files.
- Added support for toggling GitHub or Gerrit integration.
- Added check for Kashida letters.
- Added option to squash commits based on authors.
- Improved support for XLSX file format.
- Compatibility with Tesseract 4.0.
- Billing add-on now removes projects for unpaid billings after 45 days.

### 4.34.18 Weblate 3.4

Version publiée le 22 janvier 2019.

- Added support for XLIFF placeholders.
- Celery can now utilize multiple task queues.
- Added support for renaming and moving projects and components.
- Include characters counts in reports.
- Added guided adding of translation components with automatic detection of translation files.
- Customizable merge commit messages for Git.
- Added visual indication of component alerts in navigation.
- Improved performance of loading translation files.
- New add-on to squash commits prior to push.
- Improved displaying of translation changes.
- Changed default merge style to rebase and made that configurable.
- Better handle private use subtags in language code.
- Improved performance of fulltext index updates.
- Extended file upload API to support more parameters.

### 4.34.19 Weblate 3.3

Version publiée le 30 novembre 2018.

- Added support for component and project removal.
- Improved performance for some monolingual translations.
- Added translation component alerts to highlight problems with a translation.
- Expose XLIFF string rename as context when available.
- Added support for XLIFF states.
- Added check for non writable files in DATA\_DIR.
- Improved CSV export for changes.

### 4.34.20 Weblate 3.2.2

Version publiée le 20 octobre 2018.

- Remove no longer needed Babel dependency.
- Updated language definitions.
- Improve documentation for add-ons, LDAP and Celery.
- Fixed enabling new dos-eol and auto-java-messageformat flags.
- Fixed running setup.py test from PyPI package.
- Improved plurals handling.
- Fixed translation upload API failure in some corner cases.
- Fixed updating Git configuration in case it was changed manually.

### 4.34.21 Weblate 3.2.1

Version publiée le 10 octobre 2018.

- Document dependency on backports.csv on Python 2.7.
- Fix running tests under root.
- Improved error handling in gitexport module.
- Fixed progress reporting for newly added languages.
- Correctly report Celery worker errors to Sentry.
- Fixed creating new translations with Qt Linguist.
- Fixed occasional fulltext index update failures.
- Improved validation when creating new components.
- Added support for cleanup of old suggestions.

### 4.34.22 Weblate 3.2

Version publiée le 6 octobre 2018.

- Add `install_addon` management command for automated add-on installation.
- Allow more fine grained `ratelimit` settings.
- Added support for export and import of Excel files.
- Improve component cleanup in case of multiple component discovery add-ons.
- Rewritten Microsoft Terminology machine translation backend.
- Weblate now uses Celery to offload some processing.
- Improved search capabilities and added regular expression search.
- Added support for Youdao Zhiyun API machine translation.
- Added support for Baidu API machine translation.
- Integrated maintenance and cleanup tasks using Celery.
- Improved performance of loading translations by almost 25%.
- Removed support for merging headers on upload.
- Removed support for custom commit messages.
- Configurable editing mode (`zen/full`).
- Added support for error reporting to Sentry.
- Added support for automated daily update of repositories.
- Added support for creating projects and components by users.
- Built-in translation memory now automatically stores translations done.
- Users and projects can import their existing translation memories.
- Better management of related strings for screenshots.
- Added support for checking Java MessageFormat.

See [3.2 milestone on GitHub](#) for detailed list of addressed issues.

### 4.34.23 Weblate 3.1.1

Version publiée le 27 juillet 2018.

- Fix testsuite failure on some setups.

### 4.34.24 Weblate 3.1

Version publiée le 27 juillet 2018.

- Upgrades from older version than 3.0.1 are not supported.
- Allow to override default commit messages from settings.
- Improve webhooks compatibility with self hosted environments.
- Added support for Amazon Translate.
- Compatibility with Django 2.1.
- Django system checks are now used to diagnose problems with installation.
- Removed support for soon shutdown libavatar service.
- New add-on to mark unchanged translations as needing edit.
- Add support for jumping to specific location while translating.
- Downloaded translations can now be customized.
- Improved calculation of string similarity in translation memory matches.
- Added support by signing Git commits by GnuPG.

### 4.34.25 Weblate 3.0.1

Version publiée le 10 juin 2018.

- Fixed possible migration issue from 2.20.
- Mises à jour de localisation.
- Removed obsolete hook examples.
- Improved caching documentation.
- Fixed displaying of admin documentation.
- Improved handling of long language names.

### 4.34.26 Weblate 3.0

Version publiée le 1<sup>er</sup> juin 2018.

- Rewritten access control.
- Several code cleanups that lead to moved and renamed modules.
- New add-on for automatic component discovery.
- The `import_project` management command has now slightly different parameters.
- Added basic support for Windows RC files.
- New add-on to store contributor names in PO file headers.
- The per component hook scripts are removed, use add-ons instead.
- Add support for collecting contributor agreements.
- Access control changes are now tracked in history.
- New add-on to ensure all components in a project have same translations.
- Support for more variables in commit message templates.
- Add support for providing additional textual context.

## 4.35 Weblate 2.x

### 4.35.1 Weblate 2.20

Version publiée le 4 avril 2018.

- Improved speed of cloning subversion repositories.
- Changed repository locking to use third party library.
- Added support for downloading only strings needing action.
- Added support for searching in several languages at once.
- New add-on to configure gettext output wrapping.
- New add-on to configure JSON formatting.
- Added support for authentication in API using RFC 6750 compatible Bearer authentication.
- Added support for automatic translation using machine translation services.
- Added support for HTML markup in whiteboard messages.
- Added support for mass changing state of strings.
- Translate-toolkit at least 2.3.0 is now required, older versions are no longer supported.
- Added built-in translation memory.
- Added componentlists overview to dashboard and per component list overview pages.
- Added support for DeepL machine translation service.
- Machine translation results are now cached inside Weblate.
- Prise en charge de la réorganisation des modifications archivées.

### 4.35.2 Weblate 2.19.1

Version publiée le 20 février 2018.

- Fixed migration issue on upgrade from 2.18.
- Improved file upload API validation.

### 4.35.3 Weblate 2.19

Version publiée le 15 février 2018.

- Fixed imports across some file formats.
- Display human friendly browser information in audit log.
- Added TMX exporter for files.
- Various performance improvements for loading translation files.
- Added option to disable access management in Weblate in favor of Django one.
- Improved glossary lookup speed for large strings.
- Compatibility with django\_auth\_ldap 1.3.0.
- Configuration errors are now stored and reported persistently.
- Honor ignore flags in whitespace autofixer.
- Improved compatibility with some Subversion setups.
- Improved built-in machine translation service.
- Added support for SAP Translation Hub service.
- Added support for Microsoft Terminology service.
- Removed support for advertisement in notification e-mails.
- Improved translation progress reporting at language level.
- Improved support for different plural formulas.
- Added support for Subversion repositories not using stdlayout.
- Added add-ons to customize translation workflows.

### 4.35.4 Weblate 2.18

Version publiée le 15 décembre 2017.

- Extended contributor stats.
- Improved configuration of special characters virtual keyboard.
- Added support for DTD file format.
- Changed keyboard shortcuts to less likely collide with browser/system ones.
- Improved support for approved flag in XLIFF files.
- Added support for not wrapping long strings in gettext PO files.
- Added button to copy permalink for current translation.
- Dropped support for Django 1.10 and added support for Django 2.0.
- Removed locking of translations while translating.
- Added support for adding new strings to monolingual translations.
- Added support for translation workflows with dedicated reviewers.

### 4.35.5 Weblate 2.17.1

Version publiée le 13 octobre 2017.

- Fixed running testsuite in some specific situations.
- Locales updates.

### 4.35.6 Weblate 2.17

Version publiée le 13 octobre 2017.

- Weblate by default does shallow Git clones now.
- Improved performance when updating large translation files.
- Added support for blocking certain e-mails from registration.
- Users can now delete their own comments.
- Added preview step to search and replace feature.
- Client side persistence of settings in search and upload forms.
- Extended search capabilities.
- More fine grained per project ACL configuration.
- Default value of BASE\_DIR has been changed.
- Added two step account removal to prevent accidental removal.
- Project access control settings is now editable.
- Added optional spam protection for suggestions using Akismet.

### 4.35.7 Weblate 2.16

Version publiée le 11 août 2017.

- Various performance improvements.
- Added support for nested JSON format.
- Added support for WebExtension JSON format.
- Fixed git exporter authentication.
- Improved CSV import in certain situations.
- Improved look of Other translations widget.
- The max-length checks is now enforcing length of text in form.
- Make the commit\_pending age configurable per component.
- Various user interface cleanups.
- Fixed component/project/site wide search for translations.

### 4.35.8 Weblate 2.15

Version publiée le 30 juin 2017.

- Show more related translations in other translations.
- Add option to see translations of current string to other languages.
- Use 4 plural forms for Lithuanian by default.
- Fixed upload for monolingual files of different format.
- Improved error messages on failed authentication.
- Keep page state when removing word from glossary.
- Added direct link to edit secondary language translation.
- Added Perl format quality check.
- Added support for rejecting reused passwords.
- Extended toolbar for editing RTL languages.

### 4.35.9 Weblate 2.14.1

Version publiée le 24 mai 2017.

- Fixed possible error when paginating search results.
- Fixed migrations from older versions in some corner cases.
- Fixed possible CSRF on project watch and unwatch.
- The password reset no longer authenticates user.
- Fixed possible CAPTCHA bypass on forgotten password.

### 4.35.10 Weblate 2.14

Version publiée le 17 mai 2017.

- Add glossary entries using AJAX.
- The logout now uses POST to avoid CSRF.
- The API key token reset now uses POST to avoid CSRF.
- Weblate sets Content-Security-Policy by default.
- The local editor URL is validated to avoid self-XSS.
- The password is now validated against common flaws by default.
- Notify users about important activity with their account such as password change.
- The CSV exports now escape potential formulas.
- Various minor improvements in security.
- The authentication attempts are now rate limited.
- Suggestion content is stored in the history.
- Store important account activity in audit log.
- Ask for password confirmation when removing account or adding new associations.
- Show time when suggestion has been made.
- There is new quality check for trailing semicolon.
- Ensure that search links can be shared.
- Included source string information and screenshots in the API.
- Allow to overwrite translations through API upload.

### 4.35.11 Weblate 2.13.1

Version publiée le 12 avril 2017.

- Fixed listing of managed projects in profile.
- Fixed migration issue where some permissions were missing.
- Fixed listing of current file format in translation download.
- Return HTTP 404 when trying to access project where user lacks privileges.

### 4.35.12 Weblate 2.13

Version publiée le 12 avril 2017.

- Fixed quality checks on translation templates.
- Added quality check to trigger on losing translation.
- Add option to view pending suggestions from user.
- Add option to automatically build component lists.
- Default dashboard for unauthenticated users can be configured.
- Add option to browse 25 random strings for review.
- History now indicates string change.
- Better error reporting when adding new translation.
- Added per language search within project.
- Group ACLs can now be limited to certain permissions.
- The per project ACLs are now implemented using Group ACL.
- Added more fine grained privileges control.
- Various minor UI improvements.

### 4.35.13 Weblate 2.12

Version publiée le 3 mai 2017.

- Improved admin interface for groups.
- Added support for Yandex Translate API.
- Improved speed of site wide search.
- Added project and component wide search.
- Added project and component wide search and replace.
- Improved rendering of inconsistent translations.
- Added support for opening source files in local editor.
- Added support for configuring visual keyboard with special characters.
- Improved screenshot management with OCR support for matching source strings.
- Default commit message now includes translation information and URL.
- Added support for Joomla translation format.
- Improved reliability of import across file formats.

### 4.35.14 Weblate 2.11

Version publiée le 31 janvier 2017.

- Include language detailed information on language page.
- Mercurial backend improvements.
- Added option to specify translation component priority.
- More consistent usage of Group ACL even with less used permissions.
- Added WL\_BRANCH variable to hook scripts.
- Improved developer documentation.
- Better compatibility with various Git versions in Git exporter add-on.
- Included per project and component stats.
- Added language code mapping for better support of Microsoft Translate API.
- Moved fulltext cleanup to background job to make translation removal faster.
- Fixed displaying of plural source for languages with single plural form.
- Improved error handling in import\_project.
- Various performance improvements.

### 4.35.15 Weblate 2.10.1

Version publiée le 20 janvier 2017.

- Do not leak account existence on password reset form (CVE-2017-5537).

### 4.35.16 Weblate 2.10

Version publiée le 15 décembre 2016.

- Added quality check to check whether plurals are translated differently.
- Fixed GitHub hooks for repositories with authentication.
- Added optional Git exporter module.
- Support for Microsoft Cognitive Services Translator API.
- Simplified project and component user interface.
- Added automatic fix to remove control characters.
- Added per language overview to project.
- Added support for CSV export.
- Added CSV download for stats.
- Added matrix view for quick overview of all translations.
- Added basic API for changes and strings.
- Added support for Apertium APy server for machine translations.



### 4.35.17 Weblate 2.9

Version publiée le 4 novembre 2016.

- Extended parameters for createadmin management command.
- Extended import\_json to be able to handle with existing components.
- Added support for YAML files.
- Project owners can now configure translation component and project details.
- Use « Watched » instead of « Subscribed » projects.
- Projects can be watched directly from project page.
- Added multi language status widget.
- Highlight secondary language if not showing source.
- Record suggestion deletion in history.
- Improved UX of languages selection in profile.
- Fixed showing whiteboard messages for component.
- Keep preferences tab selected after saving.
- Show source string comment more prominently.
- Automatically install Gettext PO merge driver for Git repositories.
- Added search and replace feature.
- Added support for uploading visual context (screenshots) for translations.

### 4.35.18 Weblate 2.8

Version publiée le 31 août 2016.

- Améliorations de la documentation.
- Mise à jour des traductions.
- Updated bundled JavaScript libraries.
- Added list\_translators management command.
- Django 1.8 is no longer supported.
- Fixed compatibility with Django 1.10.
- Added Subversion support.
- Separated XML validity check from XML mismatched tags.
- Fixed API to honor HIDE\_REPO\_CREDENTIALS settings.
- Show source change in Zen mode.
- Alt+PageUp/PageDown/Home/End now works in Zen mode as well.
- Add tooltip showing exact time of changes.
- Add option to select filters and search from translation page.
- Added UI for translation removal.
- Improved behavior when inserting placeables.
- Fixed auto locking issues in Zen mode.

### 4.35.19 Weblate 2.7

Version publiée le 10 juillet 2016.

- Removed Google web translate machine translation.
- Improved commit message when adding translation.
- Fixed Google Translate API for Hebrew language.
- Compatibility with Mercurial 3.8.
- Added import\_json management command.
- Correct ordering of listed translations.
- Show full suggestion text, not only a diff.
- Extend API (detailed repository status, statistics, ...).
- Testsuite no longer requires network access to test repositories.

### 4.35.20 Weblate 2.6

Version publiée le 28 avril 2016.

- Fixed validation of components with language filter.
- Improved support for XLIFF files.
- Fixed machine translation for non English sources.
- Added REST API.
- Django 1.10 compatibility.
- Added categories to whiteboard messages.

### 4.35.21 Weblate 2.5

Version publiée le 10 mars 2016.

- Fixed automatic translation for project owners.
- Improved performance of commit and push operations.
- New management command to add suggestions from command-line.
- Added support for merging comments on file upload.
- Added support for some GNU extensions to C printf format.
- Améliorations de la documentation.
- Added support for generating translator credits.
- Added support for generating contributor stats.
- Site wide search can search only in one language.
- Improve quality checks for Armenian.
- Support for starting translation components without existing translations.
- Support for adding new translations in Qt TS.
- Improved support for translating PHP files.
- Performance improvements for quality checks.
- Correction pour les recherches sur l'ensemble du site des contrôles défailants.
- Added option to specify source language.
- Improved support for XLIFF files.
- Extended list of options for import\_project.
- Improved targeting for whiteboard messages.
- Support for automatic translation across projects.
- Optimized fulltext search index.
- Added management command for auto translation.
- Added placeables highlighting.
- Added keyboard shortcuts for placeables, checks and machine translations.
- Improved translation locking.
- Added quality check for AngularJS interpolation.
- Added extensive group based ACLs.
- Clarified terminology on strings needing edit (formerly fuzzy).
- Clarified terminology on strings needing action and untranslated strings.
- Support for Python 3.
- Dropped support for Django 1.7.
- Dropped dependency on msginit for creating new gettext PO files.
- Added configurable dashboard views.
- Improved notifications on parse errors.
- Added option to import components with duplicate name to import\_project.
- Improved support for translating PHP files.
- Added XLIFF export for dictionary.
- Added XLIFF and gettext PO export for all translations.
- Améliorations de la documentation.
- Added support for configurable automatic group assignments.
- Improved adding of new translations.

### 4.35.22 Weblate 2.4

Version publiée le 20 septembre 2015.

- Improved support for PHP files.
- Ability to add ACL to anonymous user.
- Improved configurability of `import_project` command.
- Added CSV dump of history.
- Avoid copy/paste errors with whitespace characters.
- Added support for Bitbucket webhooks.
- Tighter control on fuzzy strings on translation upload.
- Several URLs have changed, you might have to update your bookmarks.
- Hook scripts are executed with VCS root as current directory.
- Hook scripts are executed with environment variables describing current component.
- Add management command to optimize fulltext index.
- Added support for error reporting to Rollbar.
- Projects now can have multiple owners.
- Project owners can manage themselves.
- Added support for `javascript-format` used in gettext PO.
- Support for adding new translations in XLIFF.
- Improved file format autodetection.
- Extended keyboard shortcuts.
- Improved dictionary matching for several languages.
- Improved layout of most of pages.
- Support for adding words to dictionary while translating.
- Added support for filtering languages to be managed by Weblate.
- Added support for translating and importing CSV files.
- Rewritten handling of static files.
- Direct login/registration links to third-party service if that's the only one.
- Commit pending changes on account removal.
- Add management command to change site name.
- Add option to configure default committer.
- Add hook after adding new translation.
- Add option to specify multiple files to add to commit.

### 4.35.23 Weblate 2.3

Version publiée le 22 mai 2015.

- Dropped support for Django 1.6 and South migrations.
- Support for adding new translations when using Java Property files.
- Allow to accept suggestion without editing.
- Improved support for Google OAuth 2.0.
- Added support for Microsoft .resx files.
- Tuned default robots.txt to disallow big crawling of translations.
- Simplified workflow for accepting suggestions.
- Added project owners who always receive important notifications.
- Allow to disable editing of monolingual template.
- More detailed repository status view.
- Direct link for editing template when changing translation.
- Allow to add more permissions to project owners.
- Allow to show secondary language in Zen mode.
- Support for hiding source string in favor of secondary language.

### 4.35.24 Weblate 2.2

Version publiée le 19 février 2015.

- Amélioration des performances.
- Fulltext search on location and comments fields.
- New SVG/JavaScript-based activity charts.
- Support for Django 1.8.
- Support for deleting comments.
- Added own SVG badge.
- Added support for Google Analytics.
- Improved handling of translation filenames.
- Added support for monolingual JSON translations.
- Record component locking in a history.
- Support for editing source (template) language for monolingual translations.
- Added basic support for Gerrit.

### 4.35.25 Weblate 2.1

Version publiée le 5 décembre 2014.

- Added support for Mercurial repositories.
- Replaced Glyphicon font by Awesome.
- Added icons for social authentication services.
- Better consistency of button colors and icons.
- Améliorations de la documentation.
- Diverses corrections de bugs.
- Automatic hiding of columns in translation listing for small screens.
- Changed configuration of filesystem paths.
- Improved SSH keys handling and storage.
- Improved repository locking.
- Customizable quality checks per source string.
- Allow to hide completed translations from dashboard.

### 4.35.26 Weblate 2.0

Version publiée le 6 novembre 2014.

- New responsive UI using Bootstrap.
- Rewritten VCS backend.
- Améliorations de la documentation.
- Added whiteboard for site wide messages.
- Configurable strings priority.
- Added support for JSON file format.
- Fixed generating mo files in certain cases.
- Added support for GitLab notifications.
- Added support for disabling translation suggestions.
- Django 1.7 support.
- ACL projects now have user management.
- Extended search possibilities.
- Give more hints to translators about plurals.
- Fixed Git repository locking.
- Compatibility with older Git versions.
- Improved ACL support.
- Added buttons for per language quotes and other special characters.
- Support for exporting stats as JSONP.

## 4.36 Weblate 1.x

### 4.36.1 Weblate 1.9

Version publiée le 6 mai 2014.

- Django 1.6 compatibility.
- No longer maintained compatibility with Django 1.4.
- Management commands for locking/unlocking translations.
- Improved support for Qt TS files.
- Users can now delete their account.
- Avatars can be disabled.
- Merged first and last name attributes.
- Avatars are now fetched and cached server side.
- Added support for shields.io badge.

### 4.36.2 Weblate 1.8

Version publiée le 7 novembre 2013.

- Please check manual for upgrade instructions.
- Nicer listing of project summary.
- Better visible options for sharing.
- More control over anonymous users privileges.
- Supports login using third party services, check manual for more details.
- Users can login by e-mail instead of username.
- Améliorations de la documentation.
- Improved source strings review.
- Searching across all strings.
- Better tracking of source strings.
- Captcha protection for registration.

### 4.36.3 Weblate 1.7

Version publiée le 7 octobre 2013.

- Please check manual for upgrade instructions.
- Support for checking Python brace format string.
- Per component customization of quality checks.
- Detailed per translation stats.
- Changed way of linking suggestions, checks and comments to strings.
- Users can now add text to commit message.
- Support for subscribing on new language requests.
- Support for adding new translations.
- Widgets and charts are now rendered using Pillow instead of Pango + Cairo.
- Add status badge widget.
- Dropped invalid text direction check.
- Changes in dictionary are now logged in history.
- Performance improvements for translation view.

### 4.36.4 Weblate 1.6

Version publiée le 25 juillet 2013.

- Nicer error handling on registration.
- Browsing of changes.
- Fixed sorting of machine translation suggestions.
- Improved support for MyMemory machine translation.
- Added support for Amagama machine translation.
- Various optimizations on frequently used pages.
- Highlights searched phrase in search results.
- Support for automatic fixups while saving the message.
- Tracking of translation history and option to revert it.
- Added support for Google Translate API.
- Added support for managing SSH host keys.
- Various form validation improvements.
- Various quality checks improvements.
- Performance improvements for import.
- Added support for voting on suggestions.
- Cleanup of admin interface.

### 4.36.5 Weblate 1.5

Version publiée le 16 avril 2013.

- Please check manual for upgrade instructions.
- Added public user pages.
- Better naming of plural forms.
- Added support for TBX export of glossary.
- Added support for Bitbucket notifications.
- Activity charts are now available for each translation, language or user.
- Extended options of import\_project admin command.
- Compatible with Django 1.5.
- Avatars are now shown using libavatar.
- Added possibility to pretty print JSON export.
- Various performance improvements.
- Indicate failing checks or fuzzy strings in progress bars for projects or languages as well.
- Added support for custom pre-commit hooks and committing additional files.
- Rewritten search for better performance and user experience.
- New interface for machine translations.
- Added support for monolingual po files.
- Extend amount of cached metadata to improve speed of various searches.
- Now shows word counts as well.

### 4.36.6 Weblate 1.4

Version publiée le 23 janvier 2013.

- Fixed deleting of checks/comments on string deletion.
- Added option to disable automatic propagation of translations.
- Added option to subscribe for merge failures.
- Correctly import on projects which needs custom ttkit loader.
- Added sitemaps to allow easier access by crawlers.
- Provide direct links to string in notification e-mails or feeds.
- Various improvements to admin interface.
- Provide hints for production setup in admin interface.
- Added per language widgets and engage page.
- Improved translation locking handling.
- Show code snippets for widgets in more variants.

- Indicate failing checks or fuzzy strings in progress bars.
- More options for formatting commit message.
- Fixed error handling with machine translation services.
- Improved automatic translation locking behaviour.
- Support for showing changes from previous source string.
- Added support for substring search.
- Various quality checks improvements.
- Support for per project ACL.
- Basic code coverage by unit tests.

### 4.36.7 Weblate 1.3

Version publiée le 16 novembre 2012.

- Compatibility with PostgreSQL database backend.
- Removes languages removed in upstream git repository.
- Improved quality checks processing.
- Added new checks (BBCode, XML markup and newlines).
- Support for optional rebasing instead of merge.
- Possibility to relocate Weblate (for example to run it under /weblate path).
- Support for manually choosing file type in case autodetection fails.
- Better support for Android resources.
- Support for generating SSH key from web interface.
- More visible data exports.
- New buttons to enter some special characters.
- Support for exporting dictionary.
- Support for locking down whole Weblate installation.
- Checks for source strings and support for source strings review.
- Support for user comments for both translations and source strings.
- Better changes log tracking.
- Changes can now be monitored using RSS.
- Improved support for RTL languages.

### 4.36.8 Weblate 1.2

Version publiée le 14 août 2012.

- Weblate now uses South for database migration, please check upgrade instructions if you are upgrading.
- Fixed minor issues with linked git repos.
- New introduction page for engaging people with translating using Weblate.
- Added widgets which can be used for promoting translation projects.
- Added option to reset repository to origin (for privileged users).
- Project or component can now be locked for translations.
- Possibility to disable some translations.
- Configurable options for adding new translations.
- Configuration of git commits per project.
- Simple antispam protection.
- Better layout of main page.
- Support for automatically pushing changes on every commit.
- Support for e-mail notifications of translators.
- List only used languages in preferences.
- Improved handling of not known languages when importing project.
- Support for locking translation by translator.
- Optionally maintain `Language-Team` header in po file.
- Include some statistics in about page.
- Supports (and requires) django-registration 0.8.
- Mise en cache du nombre de chaînes avec des contrôles défaillants.
- Checking of requirements during setup.

- Améliorations de la documentation.

#### 4.36.9 Weblate 1.1

Version publiée le 4 juillet 2012.

- Improved several translations.
- Better validation while creating component.
- Added support for shared git repositories across components.
- Do not necessary commit on every attempt to pull remote repo.
- Added support for offloading indexing.

#### 4.36.10 Weblate 1.0

Version publiée le 10 mai 2012.

- Improved validation while adding/saving component.
- Experimental support for Android component files (needs patched tkit).
- Updates from hooks are run in background.
- Improved installation instructions.
- Improved navigation in dictionary.

### 4.37 Weblate 0.x

#### 4.37.1 Weblate 0.9

Version publiée le 18 avril 2012.

- Fixed import of unknown languages.
- Improved listing of nearby messages.
- Improved several checks.
- Modifications de la documentation.
- Added definition for several more languages.
- Various code cleanups.
- Améliorations de la documentation.
- Changed file layout.
- Update helper scripts to Django 1.4.
- Improved navigation while translating.
- Better handling of po file renames.
- Better validation while creating component.
- Integrated full setup into syncdb.
- Added list of recent changes to all translation pages.
- Check for untranslated strings ignores format string only messages.

#### 4.37.2 Weblate 0.8

Version publiée le 3 avril 2012.

- Replaced own full text search with Whoosh.
- Various fixes and improvements to checks.
- New command updatechecks.
- Lot of translation updates.
- Added dictionary for storing most frequently used terms.
- Added /admin/report/ for overview of repositories status.
- Machine translation services no longer block page loading.
- Management interface now contains also useful actions to update data.
- Records log of changes made by users.



- Ability to postpone commit to Git to generate less commits from single user.
- Possibility to browse failing checks.
- Traduction automatique à l'aide de chaînes déjà traduites.
- New about page showing used versions.
- Django 1.4 compatibility.
- Ability to push changes to remote repo from web interface.
- Added review of translations done by others.

### 4.37.3 Weblate 0.7

Version publiée le 16 février 2012.

- Direct support for GitHub notifications.
- Added support for cleaning up orphaned checks and translations.
- Displays nearby strings while translating.
- Displays similar strings while translating.
- Improved searching for string.

### 4.37.4 Weblate 0.6

Version publiée le 14 février 2012.

- Added various checks for translated messages.
- Tunable access control.
- Improved handling of translations with new lines.
- Added client side sorting of tables.
- Please check upgrading instructions in case you are upgrading.

### 4.37.5 Weblate 0.5

Version publiée le 12 février 2012.

- **Support for machine translation using following online services :**
  - Apertium
  - Microsoft Traduction
  - MyMemory
- Several new translations.
- Improved merging of upstream changes.
- Better handle concurrent git pull and translation.
- Propagating works for fuzzy changes as well.
- Propagating works also for file upload.
- Fixed file downloads while using FastCGI (and possibly others).

### 4.37.6 Weblate 0.4

Version publiée le 8 février 2012.

- Added usage guide to documentation.
- Fixed API hooks not to require CSRF protection.

### 4.37.7 Weblate 0.3

Version publiée le 8 février 2012.

- Better display of source for plural translations.
- New documentation in Sphinx format.
- Displays secondary languages while translating.
- Improved error page to give list of existing projects.
- New per language stats.

### 4.37.8 Weblate 0.2

Version publiée le 7 février 2012.

- Improved validation of several forms.
- Warn users on profile upgrade.
- Remember URL for login.
- Naming of text areas while entering plural forms.
- Automatic expanding of translation area.

### 4.37.9 Weblate 0.1

Version publiée le 6 février 2012.

- Première version.

### W

wlc, [135](#)  
wlc.config, [135](#)  
wlc.main, [136](#)

---

## HTTP Routing Table

---

/	GET /api/components/(string:project)/(string:component:slug)/, 115
ANY /, 92	GET /api/components/(string:project)/(string:component:slug)/, 112
/api	GET /api/components/(string:project)/(string:component:slug)/, 114
GET /api/, 95	GET /api/components/(string:project)/(string:component:slug)/, 114
/api/addons	GET /api/components/(string:project)/(string:component:slug)/, 113
GET /api/addons/, 124	GET /api/components/(string:project)/(string:component:slug)/, 112
GET /api/addons/(int:id)/, 124	GET /api/components/(string:project)/(string:component:slug)/, 115
PUT /api/addons/(int:id)/, 125	GET /api/components/(string:project)/(string:component:slug)/, 114
DELETE /api/addons/(int:id)/, 125	POST /api/components/(string:project)/(string:component:slug)/, 125
PATCH /api/addons/(int:id)/, 125	POST /api/components/(string:project)/(string:component:slug)/, 116
/api/changes	POST /api/components/(string:project)/(string:component:slug)/, 112
GET /api/changes/, 122	POST /api/components/(string:project)/(string:component:slug)/, 113
GET /api/changes/(int:id)/, 122	POST /api/components/(string:project)/(string:component:slug)/, 114
/api/component-lists	PUT /api/components/(string:project)/(string:component:slug)/, 111
GET /api/component-lists/, 125	DELETE /api/components/(string:project)/(string:component:slug)/, 111
GET /api/component-lists/(str:slug)/, 125	DELETE /api/components/(string:project)/(string:component:slug)/, 116
POST /api/component-lists/(str:slug)/components/, 126	PATCH /api/components/(string:project)/(string:component:slug)/, 110
PUT /api/component-lists/(str:slug)/, 125	/api/groups
DELETE /api/component-lists/(str:slug)/, 126	GET /api/groups/, 98
DELETE /api/component-lists/(str:slug)/components/(string:component:slug)/, 126	GET /api/groups/(int:id)/, 98
PATCH /api/component-lists/(str:slug)/, 126	POST /api/groups/, 98
/api/components	POST /api/groups/(int:id)/changes/, 100
GET /api/components/, 108	POST /api/groups/(int:id)/components/, 99
GET /api/components/(string:project)/(string:component:slug)/, 108	
GET /api/components/(string:project)/(string:component:slug)/, 111	
GET /api/components/(string:project)/(string:component:slug)/, 111	

POST /api/groups/(int:id)/languages/, 99  
 PATCH /api/projects/(string:project)/, 103

POST /api/groups/(int:id)/projects/, 99

POST /api/groups/(int:id)/roles/, 99

PUT /api/groups/(int:id)/, 98

DELETE /api/groups/(int:id)/, 99

DELETE /api/groups/(int:id)/componentlist/, 100  
 PUT /api/componentlist/(int:id)/, 100

DELETE /api/groups/(int:id)/components/, 99  
 PATCH /api/components/(int:id)/, 101

DELETE /api/groups/(int:id)/languages/(string:language)/, 100  
 GET /api/screenshots/, 123

DELETE /api/groups/(int:id)/projects/(int:project-id)/, 99  
 GET /api/screenshots/(int:id)/, 123

PATCH /api/groups/(int:id)/, 99

## /api/roles

GET /api/roles/, 100

GET /api/roles/(int:id)/, 100

POST /api/roles/, 100

DELETE /api/roles/(int:id)/, 101  
 PATCH /api/roles/(int:id)/, 101

## /api/screenshots

GET /api/screenshots/, 123

GET /api/screenshots/(int:id)/, 123

GET /api/screenshots/(int:id)/file/, 123

POST /api/screenshots/, 123

POST /api/screenshots/(int:id)/file/, 123

POST /api/screenshots/(int:id)/units/, 123

PUT /api/screenshots/(int:id)/, 124

DELETE /api/screenshots/(int:id)/, 124

DELETE /api/screenshots/(int:id)/units/(int:unit-id)/, 123

PATCH /api/screenshots/(int:id)/, 124

## /api/languages

GET /api/languages/, 101

GET /api/languages/(string:language)/, 101

GET /api/languages/(string:language)/statistics/, 102

POST /api/languages/, 101

PUT /api/languages/(string:language)/, 102

DELETE /api/languages/(string:language)/, 102

PATCH /api/languages/(string:language)/, 102

## /api/tasks

GET /api/tasks/, 126

GET /api/tasks/(str:uuid)/, 126

## /api/metrics

GET /api/metrics/, 127

## /api/projects

GET /api/projects/, 103

GET /api/projects/(string:project)/, 103

GET /api/projects/(string:project)/changes/, 104

GET /api/projects/(string:project)/components/, 105

GET /api/projects/(string:project)/languages/, 107

GET /api/projects/(string:project)/repository/, 104

GET /api/projects/(string:project)/statistics/, 107

POST /api/projects/, 103

POST /api/projects/(string:project)/component/, 105

POST /api/projects/(string:project)/repository/, 104

PUT /api/projects/(string:project)/, 103

DELETE /api/projects/(string:project)/, 103

## /api/translations

GET /api/translations/, 116

GET /api/translations/(string:project)/(string:component)/, 116

GET /api/translations/(string:project)/(string:component)/, 118

GET /api/translations/(string:project)/(string:component)/, 119

GET /api/translations/(string:project)/(string:component)/, 119

GET /api/translations/(string:project)/(string:component)/, 120

GET /api/translations/(string:project)/(string:component)/, 118

POST /api/translations/(string:project)/(string:component)/, 119

POST /api/translations/(string:project)/(string:component)/, 120

POST /api/translations/(string:project)/(string:component)/, 118

DELETE /api/translations/(string:project)/(string:component)/, 118

## /api/units

GET /api/units/, 121

GET /api/units/(int:id)/, [121](#)  
PUT /api/units/(int:id)/, [122](#)  
DELETE /api/units/(int:id)/, [122](#)  
PATCH /api/units/(int:id)/, [121](#)

## /api/users

GET /api/users/, [95](#)  
GET /api/users/(str:username)/, [95](#)  
GET /api/users/(str:username)/notifications/,  
[97](#)  
GET /api/users/(str:username)/notifications/(int:subscription\_id)/,  
[97](#)  
GET /api/users/(str:username)/statistics/,  
[96](#)  
POST /api/users/, [95](#)  
POST /api/users/(str:username)/groups/,  
[96](#)  
POST /api/users/(str:username)/notifications/,  
[97](#)  
PUT /api/users/(str:username)/, [96](#)  
PUT /api/users/(str:username)/notifications/(int:subscription\_id)/,  
[97](#)  
DELETE /api/users/(str:username)/, [96](#)  
DELETE /api/users/(str:username)/notifications/(int:subscription\_id)/,  
[97](#)  
PATCH /api/users/(str:username)/, [96](#)  
PATCH /api/users/(str:username)/notifications/(int:subscription\_id)/,  
[97](#)

## /exports

GET /exports/rss/, [130](#)  
GET /exports/rss/(string:project)/, [130](#)  
GET /exports/rss/(string:project)/(string:component)/,  
[130](#)  
GET /exports/rss/(string:project)/(string:component)/(string:language)/,  
[130](#)  
GET /exports/rss/language/(string:language)/,  
[130](#)  
GET /exports/stats/(string:project)/(string:component)/,  
[128](#)

## /hooks

GET /hooks/update/(string:project)/,  
[127](#)  
GET /hooks/update/(string:project)/(string:component)/,  
[127](#)  
POST /hooks/azure/, [128](#)  
POST /hooks/bitbucket/, [128](#)  
POST /hooks/gitea/, [128](#)  
POST /hooks/gitee/, [128](#)  
POST /hooks/github/, [127](#)  
POST /hooks/gitlab/, [127](#)  
POST /hooks/pagure/, [128](#)

## Symboles

- .XML resource file
  - file format, [78](#)
- add
  - option de ligne de commande auto\_translate, [348](#)
- addon
  - option de ligne de commande install\_addon, [354](#)
- age
  - option de ligne de commande commit\_pending, [349](#)
- author
  - option de ligne de commande add\_suggestions, [348](#)
- author-email
  - option de ligne de commande wlc, [133](#)
- author-name
  - option de ligne de commande wlc, [133](#)
- base-file-template
  - option de ligne de commande import\_project, [352](#)
- check
  - option de ligne de commande import\_users, [354](#)
- config
  - option de ligne de commande wlc, [131](#)
- config-section
  - option de ligne de commande wlc, [132](#)
- configuration
  - option de ligne de commande install\_addon, [354](#)
- convert
  - option de ligne de commande wlc, [133](#)
- email
  - option de ligne de commande createadmin, [350](#)
- file-format
  - option de ligne de commande import\_project, [352](#)
- force
  - option de ligne de commande loadpo, [355](#)
- force-commit
  - option de ligne de commande pushgit, [356](#)
- format
  - option de ligne de commande wlc, [131](#)
- fuzzy
  - option de ligne de commande wlc, [133](#)
- ignore
  - option de ligne de commande import\_json, [351](#)
- inconsistent
  - option de ligne de commande auto\_translate, [348](#)
- input
  - option de ligne de commande wlc, [133](#)
- key
  - option de ligne de commande wlc, [131](#)
- lang
  - option de ligne de commande loadpo, [355](#)
- language-code
  - option de ligne de commande list\_translators, [355](#)
- language-map
  - option de ligne de commande import\_memory, [352](#)
- language-regex
  - option de ligne de commande import\_project, [353](#)
- license
  - option de ligne de commande import\_project, [353](#)
- license-url
  - option de ligne de commande import\_project, [353](#)
- main-component
  - option de ligne de commande import\_json, [351](#)
  - option de ligne de commande import\_project, [353](#)
- method
  - option de ligne de commande wlc, [133](#)
- mode
  - option de ligne de commande

auto\_translate, 349

--mt  
option de ligne de commande  
auto\_translate, 348

--name  
option de ligne de commande crea-  
teadmin, 350

--name-template  
option de ligne de commande im-  
port\_project, 352

--new-base-template  
option de ligne de commande im-  
port\_project, 352

--no-password  
option de ligne de commande crea-  
teadmin, 350

--no-privs-update  
option de ligne de commande setup-  
groups, 357

--no-projects-update  
option de ligne de commande setup-  
groups, 357

--no-update  
option de ligne de commande setu-  
plang, 357

--output  
option de ligne de commande wlc, 133

--overwrite  
option de ligne de commande  
auto\_translate, 348  
option de ligne de commande wlc, 133

--password  
option de ligne de commande crea-  
teadmin, 350

--project  
option de ligne de commande im-  
port\_json, 351

--source  
option de ligne de commande  
auto\_translate, 348

--threshold  
option de ligne de commande  
auto\_translate, 348

--update  
option de ligne de commande crea-  
teadmin, 350  
option de ligne de commande im-  
port\_json, 351  
option de ligne de commande ins-  
tall\_addon, 354

--url  
option de ligne de commande wlc, 131

--user  
option de ligne de commande  
auto\_translate, 348

--username  
option de ligne de commande crea-  
teadmin, 350

--vcs  
option de ligne de commande im-  
port\_project, 353

## A

add\_suggestions  
weblate admin command, 348

ADMINS  
setting, 182

AKISMET\_API\_KEY  
setting, 302

ALLOWED\_HOSTS  
setting, 182

Android  
file format, 73

ANONYMOUS\_USER\_NAME  
setting, 302

API, 92, 130, 135

Apple strings  
file format, 74

ARB  
file format, 77

AUDITLOG\_EXPIRY  
setting, 302

AUTH\_LOCK\_ATTEMPTS  
setting, 302

AUTH\_TOKEN\_VALID  
setting, 303

auto\_translate  
weblate admin command, 348

AUTO\_UPDATE  
setting, 302

AUTOFIX\_LIST  
setting, 303

AVATAR\_URL\_PREFIX  
setting, 303

## B

BACKGROUND\_TASKS  
setting, 304

BASE\_DIR  
setting, 304

BaseAddon (*classe dans weblate.addons.base*), 392

BASIC\_LANGUAGES  
setting, 305

bilingues  
traduction, 65

BORG\_EXTRA\_ARGS  
setting, 305

## C

can\_install() (*méthode de la classe we-  
blate.addons.base.BaseAddon*), 392

CELERY\_BACKUP\_OPTIONS, 142, 157

CELERY\_BEAT\_OPTIONS, 142, 157

CELERY\_MAIN\_OPTIONS, 142, 157

CELERY\_MEMORY\_OPTIONS, 142, 157

CELERY\_NOTIFY\_OPTIONS, 142, 157



- celery\_queues
    - weblate admin command, 349
  - CELERY\_TRANSLATE\_OPTIONS, 142, 157
  - changes
    - option de ligne de commande wlc, 133
  - CHECK\_LIST
    - setting, 305
  - checkgit
    - weblate admin command, 349
  - cleanup
    - option de ligne de commande wlc, 132
  - cleanup\_ssh\_keys
    - weblate admin command, 350
  - cleanuptrans
    - weblate admin command, 350
  - Comma separated values
    - file format, 79
  - Command (*classe dans wlc.main*), 136
  - COMMENT\_CLEANUP\_DAYS
    - setting, 306
  - commit
    - option de ligne de commande wlc, 132
  - commit\_pending
    - weblate admin command, 349
  - COMMIT\_PENDING\_HOURS
    - setting, 306
  - commitgit
    - weblate admin command, 349
  - configure() (*méthode blate.addons.base.BaseAddon*), 392
  - CONTACT\_FORM
    - setting, 306
  - createadmin
    - weblate admin command, 350
  - CSP\_CONNECT\_SRC
    - setting, 305
  - CSP\_FONT\_SRC
    - setting, 305
  - CSP\_IMG\_SRC
    - setting, 305
  - CSP\_SCRIPT\_SRC
    - setting, 305
  - CSP\_STYLE\_SRC
    - setting, 305
  - CSV
    - file format, 79
- ## D
- daily() (*méthode weblate.addons.base.BaseAddon*), 392
  - DATA\_DIR
    - setting, 307
  - DATABASE\_BACKUP
    - setting, 307
  - DATABASES
    - setting, 182
  - DEBUG
    - setting, 182
  - DEFAULT\_ACCESS\_CONTROL
    - setting, 307
  - DEFAULT\_ADD\_MESSAGE
    - setting, 308
  - DEFAULT\_ADDON\_MESSAGE
    - setting, 308
  - DEFAULT\_ADDONS
    - setting, 308
  - DEFAULT\_AUTO\_WATCH
    - setting, 308
  - DEFAULT\_COMMIT\_MESSAGE
    - setting, 308
  - DEFAULT\_COMMITER\_EMAIL
    - setting, 309
  - DEFAULT\_COMMITER\_NAME
    - setting, 309
  - DEFAULT\_DELETE\_MESSAGE
    - setting, 308
  - DEFAULT\_FROM\_EMAIL
    - setting, 182
  - DEFAULT\_LANGUAGE
    - setting, 309
  - DEFAULT\_MERGE\_MESSAGE
    - setting, 308
  - DEFAULT\_MERGE\_STYLE
    - setting, 309
  - DEFAULT\_PAGE\_LIMIT
    - setting, 323
  - DEFAULT\_PULL\_MESSAGE
    - setting, 310
  - DEFAULT\_RESTRICTED\_COMPONENT
    - setting, 308
  - DEFAULT\_SHARED\_TM
    - setting, 310
  - DEFAULT\_TRANSLATION\_PROPAGATION
    - setting, 310
  - download
    - option de ligne de commande wlc, 133
  - DTD
    - file format, 80
  - dump\_memory
    - weblate admin command, 350
  - dumpuserdata
    - weblate admin command, 351
- ## E
- ENABLE\_AVATARS
    - setting, 310
  - ENABLE\_HOOKS
    - setting, 310
  - ENABLE\_HTTPS
    - setting, 310
  - ENABLE\_SHARING
    - setting, 311
- ## F
- file format
    - .XML resource file, 78

- Android, [73](#)
- Apple strings, [74](#)
- ARB, [77](#)
- Comma separated values, [79](#)
- CSV, [79](#)
- DTD, [80](#)
- gettext, [68](#)
- go-i18n, [77](#)
- GWT properties, [71](#)
- i18next, [76](#)
- INI translations, [72](#)
- Java properties, [71](#)
- Joomla translations, [72](#)
- JSON, [75](#)
- mi18n lang, [71](#)
- PHP strings, [74](#)
- PO, [68](#)
- Qt, [73](#)
- RC, [81](#)
- RESX, [78](#)
- Ruby YAML, [80](#)
- Ruby YAML Ain't Markup Language, [80](#)
- string resources, [73](#)
- TS, [73](#)
- XLIFF, [69](#)
- XML, [81](#)
- YAML, [79](#)
- YAML Ain't Markup Language, [79](#)

## G

- `get()` (*méthode wlc. Weblate*), [135](#)
- `get_add_form()` (*méthode de la classe `weblate.addons.base.BaseAddon`*), [392](#)
- `GET_HELP_URL`
  - setting, [311](#)
- `get_settings_form()` (*méthode `weblate.addons.base.BaseAddon`*), [392](#)
- `gettext`
  - file format, [68](#)
- `GITHUB_CREDENTIALS`
  - setting, [312](#)
- `GITHUB_TOKEN`
  - setting, [312](#)
- `GITHUB_USERNAME`
  - setting, [312](#)
- `GITLAB_CREDENTIALS`
  - setting, [311](#)
- `GITLAB_TOKEN`
  - setting, [312](#)
- `GITLAB_USERNAME`
  - setting, [311](#)
- `go-i18n`
  - file format, [77](#)
- `GOOGLE_ANALYTICS_ID`
  - setting, [312](#)
- GWT properties
  - file format, [71](#)

## H

- `HIDE_REPO_CREDENTIALS`
  - setting, [313](#)
- `HIDE_VERSION`
  - setting, [313](#)

## I

- `i18next`
  - file format, [76](#)
- `import_demo`
  - weblate admin command, [351](#)
- `import_json`
  - weblate admin command, [351](#)
- `import_memory`
  - weblate admin command, [352](#)
- `import_project`
  - weblate admin command, [352](#)
- `importuserdata`
  - weblate admin command, [354](#)
- `importusers`
  - weblate admin command, [354](#)
- INI translations
  - file format, [72](#)
- `install_addon`
  - weblate admin command, [354](#)
- `IP_BEHIND_REVERSE_PROXY`
  - setting, [313](#)
- `IP_PROXY_HEADER`
  - setting, [313](#)
- `IP_PROXY_OFFSET`
  - setting, [314](#)
- iPad
  - translation, [74](#)
- iPhone
  - translation, [74](#)

## J

- Java properties
  - file format, [71](#)
- Joomla translations
  - file format, [72](#)
- JSON
  - file format, [75](#)

## L

- `LEGAL_URL`
  - setting, [314](#)
- `LICENSE_EXTRA`
  - setting, [314](#)
- `LICENSE_FILTER`
  - setting, [315](#)
- `LICENSE_REQUIRED`
  - setting, [315](#)
- `LIMIT_TRANSLATION_LENGTH_BY_SOURCE_LENGTH`
  - setting, [315](#)
- `list_languages`
  - weblate admin command, [355](#)
- `list_translators`

- weblate admin command, 355
- list\_versions
  - weblate admin command, 355
- list-components
  - option de ligne de commande wlc, 132
- list-languages
  - option de ligne de commande wlc, 132
- list-projects
  - option de ligne de commande wlc, 132
- list-translations
  - option de ligne de commande wlc, 132
- load() (*méthode wlc.config.WeblateConfig*), 135
- loadpo
  - weblate admin command, 355
- LOCALIZE\_CDN\_PATH
  - setting, 315
- LOCALIZE\_CDN\_URL
  - setting, 315
- lock
  - option de ligne de commande wlc, 132
- lock\_translation
  - weblate admin command, 356
- lock-status
  - option de ligne de commande wlc, 132
- LOGIN\_REQUIRED\_URLS
  - setting, 316
- LOGIN\_REQUIRED\_URLS\_EXCEPTIONS
  - setting, 316
- ls
  - option de ligne de commande wlc, 132

## M

- MACHINE\_TRANSLATION\_SERVICES
  - setting, 317
- main() (*dans le module wlc.main*), 136
- MATOMO\_SITE\_ID
  - setting, 316
- MATOMO\_URL
  - setting, 317
- mi18n lang
  - file format, 71
- module
  - wlc, 135
  - wlc.config, 135
  - wlc.main, 136
- monolingues
  - traduction, 65
- move\_language
  - weblate admin command, 356
- MT\_APERTIUM\_APY
  - setting, 318
- MT\_AWS\_ACCESS\_KEY\_ID
  - setting, 318
- MT\_AWS\_REGION
  - setting, 318
- MT\_AWS\_SECRET\_ACCESS\_KEY
  - setting, 318
- MT\_BAIDU\_ID
  - setting, 318
- MT\_BAIDU\_SECRET
  - setting, 318
- MT\_DEEPL\_API\_URL
  - setting, 319
- MT\_DEEPL\_KEY
  - setting, 319
- MT\_GOOGLE\_CREDENTIALS
  - setting, 320
- MT\_GOOGLE\_KEY
  - setting, 320
- MT\_GOOGLE\_LOCATION
  - setting, 320
- MT\_GOOGLE\_PROJECT
  - setting, 320
- MT\_LIBRETRANSLATE\_API\_URL
  - setting, 319
- MT\_LIBRETRANSLATE\_KEY
  - setting, 319
- MT\_MICROSOFT\_BASE\_URL
  - setting, 320
- MT\_MICROSOFT\_COGNITIVE\_KEY
  - setting, 320
- MT\_MICROSOFT\_ENDPOINT\_URL
  - setting, 321
- MT\_MICROSOFT\_REGION
  - setting, 321
- MT\_MODERNMT\_KEY
  - setting, 321
- MT\_MODERNMT\_URL
  - setting, 321
- MT\_MYMEMORY\_EMAIL
  - setting, 321
- MT\_MYMEMORY\_KEY
  - setting, 321
- MT\_MYMEMORY\_USER
  - setting, 321
- MT\_NETEASE\_KEY
  - setting, 322
- MT\_NETEASE\_SECRET
  - setting, 322
- MT\_SAP\_BASE\_URL
  - setting, 322
- MT\_SAP\_PASSWORD
  - setting, 323
- MT\_SAP\_SANDBOX\_APIKEY
  - setting, 323
- MT\_SAP\_USE\_MT
  - setting, 323
- MT\_SAP\_USERNAME
  - setting, 323
- MT\_SERVICES
  - setting, 317
- MT\_TMSERVER
  - setting, 322
- MT\_YANDEX\_KEY
  - setting, 322
- MT\_YOUDAO\_ID

setting, 322  
MT\_YOUDAO\_SECRET  
setting, 322

## N

NEARBY\_MESSAGES  
setting, 323

## O

option de ligne de commande  
add\_suggestions  
--author, 348  
option de ligne de commande  
auto\_translate  
--add, 348  
--inconsistent, 348  
--mode, 349  
--mt, 348  
--overwrite, 348  
--source, 348  
--threshold, 348  
--user, 348  
option de ligne de commande com-  
mit\_pending  
--age, 349  
option de ligne de commande createad-  
min  
--email, 350  
--name, 350  
--no-password, 350  
--password, 350  
--update, 350  
--username, 350  
option de ligne de commande im-  
port\_json  
--ignore, 351  
--main-component, 351  
--project, 351  
--update, 351  
option de ligne de commande im-  
port\_memory  
--language-map, 352  
option de ligne de commande im-  
port\_project  
--base-file-template, 352  
--file-format, 352  
--language-regex, 353  
--license, 353  
--license-url, 353  
--main-component, 353  
--name-template, 352  
--new-base-template, 352  
--vcs, 353  
option de ligne de commande importu-  
sers  
--check, 354  
option de ligne de commande ins-  
tall\_addon

--addon, 354  
--configuration, 354  
--update, 354  
option de ligne de commande  
list\_translators  
--language-code, 355  
option de ligne de commande loadpo  
--force, 355  
--lang, 355  
option de ligne de commande pushgit  
--force-commit, 356  
option de ligne de commande setup-  
groups  
--no-privs-update, 357  
--no-projects-update, 357  
option de ligne de commande setuplang  
--no-update, 357  
option de ligne de commande wlc  
--author-email, 133  
--author-name, 133  
--config, 131  
--config-section, 132  
--convert, 133  
--format, 131  
--fuzzy, 133  
--input, 133  
--key, 131  
--method, 133  
--output, 133  
--overwrite, 133  
--url, 131  
changes, 133  
cleanup, 132  
commit, 132  
download, 133  
list-components, 132  
list-languages, 132  
list-projects, 132  
list-translations, 132  
lock, 132  
lock-status, 132  
ls, 132  
pull, 132  
push, 132  
repo, 132  
reset, 132  
show, 132  
statistics, 132  
unlock, 132  
upload, 133  
version, 132

## P

PAGURE\_CREDENTIALS  
setting, 323  
PAGURE\_TOKEN  
setting, 324  
PAGURE\_USERNAME

- setting, 324
- PHP strings
  - file format, 74
- PIWIK\_SITE\_ID
  - setting, 316
- PIWIK\_URL
  - setting, 317
- PO
  - file format, 68
- post() (méthode *wlc. Weblate*), 135
- post\_add() (méthode *blate.addons.base.BaseAddon*), 392
- post\_commit() (méthode *blate.addons.base.BaseAddon*), 392
- post\_push() (méthode *blate.addons.base.BaseAddon*), 392
- post\_update() (méthode *blate.addons.base.BaseAddon*), 392
- pre\_commit() (méthode *blate.addons.base.BaseAddon*), 392
- pre\_push() (méthode *blate.addons.base.BaseAddon*), 392
- pre\_update() (méthode *blate.addons.base.BaseAddon*), 392
- PRIVACY\_URL
  - setting, 324
- pull
  - option de ligne de commande *wlc*, 132
- push
  - option de ligne de commande *wlc*, 132
- pushgit
  - weblate* admin command, 356
- Python, 135
- Q**
- Qt
  - file format, 73
- R**
- RATELIMIT\_ATTEMPTS
  - setting, 324
- RATELIMIT\_LOCKOUT
  - setting, 325
- RATELIMIT\_WINDOW
  - setting, 325
- RC
  - file format, 81
- register\_command() (dans le module *wlc.main*), 136
- REGISTRATION\_ALLOW\_BACKENDS
  - setting, 325
- REGISTRATION\_CAPTCHA
  - setting, 325
- REGISTRATION\_EMAIL\_MATCH
  - setting, 326
- REGISTRATION\_OPEN
  - setting, 326
- repo
  - option de ligne de commande *wlc*, 132
- REPOSITORY\_ALERT\_THRESHOLD
  - setting, 326
- REQUIRE\_LOGIN
  - setting, 326
- reset
  - option de ligne de commande *wlc*, 132
- REST, 92
- RESX
  - file format, 78
- we- RFC
  - RFC 5646, 65
- we- Ruby YAML
  - file format, 80
- we- Ruby YAML Ain't Markup Language
  - file format, 80
- we-
- S**
- we- save\_state() (méthode *blate.addons.base.BaseAddon*), 392 we-
- we- SECRET\_KEY
  - setting, 182
- we- SENTRY\_DSN
  - setting, 327
- SERVER\_EMAIL
  - setting, 182
- SESSION\_COOKIE\_AGE\_AUTHENTICATED
  - setting, 327
- SESSION\_ENGINE
  - setting, 182
- setting
  - ADMINS, 182
  - AKISMET\_API\_KEY, 302
  - ALLOWED\_HOSTS, 182
  - ANONYMOUS\_USER\_NAME, 302
  - AUDITLOG\_EXPIRY, 302
  - AUTH\_LOCK\_ATTEMPTS, 302
  - AUTH\_TOKEN\_VALID, 303
  - AUTO\_UPDATE, 302
  - AUTOFIX\_LIST, 303
  - AVATAR\_URL\_PREFIX, 303
  - BACKGROUND\_TASKS, 304
  - BASE\_DIR, 304
  - BASIC\_LANGUAGES, 305
  - BORG\_EXTRA\_ARGS, 305
  - CHECK\_LIST, 305
  - COMMENT\_CLEANUP\_DAYS, 306
  - COMMIT\_PENDING\_HOURS, 306
  - CONTACT\_FORM, 306
  - CSP\_CONNECT\_SRC, 305
  - CSP\_FONT\_SRC, 305
  - CSP\_IMG\_SRC, 305
  - CSP\_SCRIPT\_SRC, 305
  - CSP\_STYLE\_SRC, 305
  - DATA\_DIR, 307
  - DATABASE\_BACKUP, 307
  - DATABASES, 182
  - DEBUG, 182

DEFAULT\_ACCESS\_CONTROL, 307  
 DEFAULT\_ADD\_MESSAGE, 308  
 DEFAULT\_ADDON\_MESSAGE, 308  
 DEFAULT\_ADDONS, 308  
 DEFAULT\_AUTO\_WATCH, 308  
 DEFAULT\_COMMIT\_MESSAGE, 308  
 DEFAULT\_COMMITER\_EMAIL, 309  
 DEFAULT\_COMMITER\_NAME, 309  
 DEFAULT\_DELETE\_MESSAGE, 308  
 DEFAULT\_FROM\_EMAIL, 182  
 DEFAULT\_LANGUAGE, 309  
 DEFAULT\_MERGE\_MESSAGE, 308  
 DEFAULT\_MERGE\_STYLE, 309  
 DEFAULT\_PAGE\_LIMIT, 323  
 DEFAULT\_PULL\_MESSAGE, 310  
 DEFAULT\_RESTRICTED\_COMPONENT, 308  
 DEFAULT\_SHARED\_TM, 310  
 DEFAULT\_TRANSLATION\_PROPAGATION, 310  
 ENABLE\_AVATARS, 310  
 ENABLE\_HOOKS, 310  
 ENABLE\_HTTPS, 310  
 ENABLE\_SHARING, 311  
 GET\_HELP\_URL, 311  
 GITHUB\_CREDENTIALS, 312  
 GITHUB\_TOKEN, 312  
 GITHUB\_USERNAME, 312  
 GITLAB\_CREDENTIALS, 311  
 GITLAB\_TOKEN, 312  
 GITLAB\_USERNAME, 311  
 GOOGLE\_ANALYTICS\_ID, 312  
 HIDE\_REPO\_CREDENTIALS, 313  
 HIDE\_VERSION, 313  
 IP\_BEHIND\_REVERSE\_PROXY, 313  
 IP\_PROXY\_HEADER, 313  
 IP\_PROXY\_OFFSET, 314  
 LEGAL\_URL, 314  
 LICENSE\_EXTRA, 314  
 LICENSE\_FILTER, 315  
 LICENSE\_REQUIRED, 315  
 LIMIT\_TRANSLATION\_LENGTH\_BY\_SOURCE\_LENGTH, 315  
 LOCALIZE\_CDN\_PATH, 315  
 LOCALIZE\_CDN\_URL, 315  
 LOGIN\_REQUIRED\_URLS, 316  
 LOGIN\_REQUIRED\_URLS\_EXCEPTIONS, 316  
 MACHINE\_TRANSLATION\_SERVICES, 317  
 MATOMO\_SITE\_ID, 316  
 MATOMO\_URL, 317  
 MT\_APERTIUM\_APY, 318  
 MT\_AWS\_ACCESS\_KEY\_ID, 318  
 MT\_AWS\_REGION, 318  
 MT\_AWS\_SECRET\_ACCESS\_KEY, 318  
 MT\_BAIDU\_ID, 318  
 MT\_BAIDU\_SECRET, 318  
 MT\_DEEPL\_API\_URL, 319  
 MT\_DEEPL\_KEY, 319  
 MT\_GOOGLE\_CREDENTIALS, 320  
 MT\_GOOGLE\_KEY, 320  
 MT\_GOOGLE\_LOCATION, 320  
 MT\_GOOGLE\_PROJECT, 320  
 MT\_LIBRETRANSLATE\_API\_URL, 319  
 MT\_LIBRETRANSLATE\_KEY, 319  
 MT\_MICROSOFT\_BASE\_URL, 320  
 MT\_MICROSOFT\_COGNITIVE\_KEY, 320  
 MT\_MICROSOFT\_ENDPOINT\_URL, 321  
 MT\_MICROSOFT\_REGION, 321  
 MT\_MODERNMT\_KEY, 321  
 MT\_MODERNMT\_URL, 321  
 MT\_MYMEMORY\_EMAIL, 321  
 MT\_MYMEMORY\_KEY, 321  
 MT\_MYMEMORY\_USER, 321  
 MT\_NETEASE\_KEY, 322  
 MT\_NETEASE\_SECRET, 322  
 MT\_SAP\_BASE\_URL, 322  
 MT\_SAP\_PASSWORD, 323  
 MT\_SAP\_SANDBOX\_APIKEY, 323  
 MT\_SAP\_USE\_MT, 323  
 MT\_SAP\_USERNAME, 323  
 MT\_SERVICES, 317  
 MT\_TMSERVER, 322  
 MT\_YANDEX\_KEY, 322  
 MT\_YOUDAO\_ID, 322  
 MT\_YOUDAO\_SECRET, 322  
 NEARBY\_MESSAGES, 323  
 PAGURE\_CREDENTIALS, 323  
 PAGURE\_TOKEN, 324  
 PAGURE\_USERNAME, 324  
 PIWIK\_SITE\_ID, 316  
 PIWIK\_URL, 317  
 PRIVACY\_URL, 324  
 RATELIMIT\_ATTEMPTS, 324  
 RATELIMIT\_LOCKOUT, 325  
 RATELIMIT\_WINDOW, 325  
 REGISTRATION\_ALLOW\_BACKENDS, 325  
 REGISTRATION\_CAPTCHA, 325  
 REGISTRATION\_EMAIL\_MATCH, 326  
 REGISTRATION\_OPEN, 326  
 REPOSITORY\_ALERT\_THRESHOLD, 326  
 REQUIRE\_LOGIN, 326  
 SECRET\_KEY, 182  
 SENTRY\_DSN, 327  
 SERVER\_EMAIL, 182  
 SESSION\_COOKIE\_AGE\_AUTHENTICATED, 327  
 SESSION\_ENGINE, 182  
 SIMPLIFY\_LANGUAGES, 327  
 SINGLE\_PROJECT, 328  
 SITE\_DOMAIN, 327  
 SITE\_TITLE, 328  
 SPECIAL\_CHARS, 328  
 SSH\_EXTRA\_ARGS, 328  
 STATUS\_URL, 328  
 SUGGESTION\_CLEANUP\_DAYS, 329  
 UPDATE\_LANGUAGES, 329  
 URL\_PREFIX, 329

VCS\_BACKENDS, 329  
 VCS\_CLONE\_DEPTH, 329  
 WEBLATE\_ADDONS, 330  
 WEBLATE\_EXPORTERS, 330  
 WEBLATE\_FORMATS, 331  
 WEBLATE\_GPG\_IDENTITY, 331  
 WEBSITE\_REQUIRED, 331  
 setupgroups  
     weblate admin command, 357  
 setuplang  
     weblate admin command, 357  
 show  
     option de ligne de commande wlc, 132  
 SIMPLIFY\_LANGUAGES  
     setting, 327  
 SINGLE\_PROJECT  
     setting, 328  
 SITE\_DOMAIN  
     setting, 327  
 SITE\_TITLE  
     setting, 328  
 SPECIAL\_CHARS  
     setting, 328  
 SSH\_EXTRA\_ARGS  
     setting, 328  
 statistics  
     option de ligne de commande wlc, 132  
 STATUS\_URL  
     setting, 328  
 store\_post\_load() (méthode *weblate.addons.base.BaseAddon*), 392  
 string resources  
     file format, 73  
 SUGGESTION\_CLEANUP\_DAYS  
     setting, 329

## T

traduction  
     bilingues, 65  
     monolingues, 65  
 translation  
     iPad, 74  
     iPhone, 74  
 TS  
     file format, 73

## U

unit\_pre\_create() (méthode *weblate.addons.base.BaseAddon*), 392  
 unlock  
     option de ligne de commande wlc, 132  
 unlock\_translation  
     weblate admin command, 357  
 UPDATE\_LANGUAGES  
     setting, 329  
 updatechecks  
     weblate admin command, 357  
 updategit

    weblate admin command, 358  
 upload  
     option de ligne de commande wlc, 133  
 URL\_PREFIX  
     setting, 329

## V

variable d'environnement  
     CELERY\_BACKUP\_OPTIONS, 142, 157  
     CELERY\_BEAT\_OPTIONS, 142, 157  
     CELERY\_MAIN\_OPTIONS, 142, 157  
     CELERY\_MEMORY\_OPTIONS, 142, 157  
     CELERY\_NOTIFY\_OPTIONS, 142, 157  
     CELERY\_TRANSLATE\_OPTIONS, 142, 157  
     POSTGRES\_ALTER\_ROLE, 153  
     POSTGRES\_CONN\_MAX\_AGE, 153  
     POSTGRES\_DATABASE, 153  
     POSTGRES\_DISABLE\_SERVER\_SIDE\_CURSORS, 153  
     POSTGRES\_HOST, 153  
     POSTGRES\_PASSWORD, 153  
     POSTGRES\_PASSWORD\_FILE, 153  
     POSTGRES\_PORT, 153  
     POSTGRES\_SSL\_MODE, 153  
     POSTGRES\_USER, 153  
     REDIS\_DB, 154  
     REDIS\_HOST, 154  
     REDIS\_PASSWORD, 154  
     REDIS\_PORT, 154  
     REDIS\_TLS, 154  
     REDIS\_VERIFY\_SSL, 154  
     ROLLBAR\_ENVIRONMENT, 156  
     ROLLBAR\_KEY, 156  
     SENTRY\_DSN, 156  
     SENTRY\_ENVIRONMENT, 156  
     SOCIAL\_AUTH\_SLACK\_SECRET, 152  
     WEB\_WORKERS, 142, 157  
     WEBLATE\_ADD\_ADDONS, 157  
     WEBLATE\_ADD\_APPS, 157  
     WEBLATE\_ADD\_AUTOFIX, 157  
     WEBLATE\_ADD\_CHECK, 157  
     WEBLATE\_ADD\_LOGIN\_REQUIRED\_URLS\_EXCEPTIONS, 145  
     WEBLATE\_ADMIN\_EMAIL, 141, 143, 148  
     WEBLATE\_ADMIN\_NAME, 141, 143  
     WEBLATE\_ADMIN\_PASSWORD, 138, 141, 143  
     WEBLATE\_ADMIN\_PASSWORD\_FILE, 143  
     WEBLATE\_AKISMET\_API\_KEY, 146, 365  
     WEBLATE\_ALLOWED\_HOSTS, 143, 182, 186, 328  
     WEBLATE\_API\_RATELIMIT\_ANON, 94, 95, 147  
     WEBLATE\_API\_RATELIMIT\_USER, 94, 95, 147  
     WEBLATE\_AUTH\_LDAP\_BIND\_DN, 149  
     WEBLATE\_AUTH\_LDAP\_BIND\_PASSWORD, 149



WEBLATE\_AUTH\_LDAP\_CONNECTION\_OPTION\_REQUIRED, 149  
 WEBLATE\_AUTH\_LDAP\_SERVER\_URI, 149  
 WEBLATE\_AUTH\_LDAP\_USER\_ATTR\_MAP, 149  
 WEBLATE\_AUTH\_LDAP\_USER\_DN\_TEMPLATE, 149  
 WEBLATE\_AUTH\_LDAP\_USER\_SEARCH, 149  
 WEBLATE\_AUTH\_LDAP\_USER\_SEARCH\_FILTER, 149  
 WEBLATE\_AUTH\_LDAP\_USER\_SEARCH\_UNION, 149  
 WEBLATE\_AUTH\_LDAP\_USER\_SEARCH\_UNION\_DELIMITER, 149  
 WEBLATE\_AUTO\_UPDATE, 155  
 WEBLATE\_BASIC\_LANGUAGES, 147  
 WEBLATE\_BORG\_EXTRA\_ARGS, 147  
 WEBLATE\_CONTACT\_FORM, 143  
 WEBLATE\_CSP\_CONNECT\_SRC, 146  
 WEBLATE\_CSP\_FONT\_SRC, 146  
 WEBLATE\_CSP\_IMG\_SRC, 146  
 WEBLATE\_CSP\_SCRIPT\_SRC, 146  
 WEBLATE\_CSP\_STYLE\_SRC, 146  
 WEBLATE\_DATABASE\_BACKUP, 154  
 WEBLATE\_DEBUG, 142  
 WEBLATE\_DEFAULT\_ACCESS\_CONTROL, 146  
 WEBLATE\_DEFAULT\_AUTO\_WATCH, 147  
 WEBLATE\_DEFAULT\_COMMITTER\_EMAIL, 146  
 WEBLATE\_DEFAULT\_COMMITTER\_NAME, 146  
 WEBLATE\_DEFAULT\_FROM\_EMAIL, 143  
 WEBLATE\_DEFAULT\_PULL\_MESSAGE, 146  
 WEBLATE\_DEFAULT\_RESTRICTED\_COMPONENT, 146  
 WEBLATE\_DEFAULT\_SHARED\_TM, 146  
 WEBLATE\_DEFAULT\_TRANSLATION\_PROPAGATION, 146  
 WEBLATE\_EMAIL\_BACKEND, 155  
 WEBLATE\_EMAIL\_HOST, 154  
 WEBLATE\_EMAIL\_HOST\_PASSWORD, 155  
 WEBLATE\_EMAIL\_HOST\_PASSWORD\_FILE, 155  
 WEBLATE\_EMAIL\_HOST\_USER, 155  
 WEBLATE\_EMAIL\_PORT, 155  
 WEBLATE\_EMAIL\_USE\_SSL, 155  
 WEBLATE\_EMAIL\_USE\_TLS, 155  
 WEBLATE\_ENABLE\_AVATARS, 147  
 WEBLATE\_ENABLE\_HTTPS, 144, 214  
 WEBLATE\_GET\_HELP\_URL, 156  
 WEBLATE\_GITHUB\_TOKEN, 145  
 WEBLATE\_GITHUB\_USERNAME, 145  
 WEBLATE\_GITLAB\_TOKEN, 145  
 WEBLATE\_GITLAB\_USERNAME, 145  
 WEBLATE\_GOOGLE\_ANALYTICS\_ID, 145  
 WEBLATE\_GPG\_IDENTITY, 146  
 WEBLATE\_HIDE\_VERSION, 147  
 WEBLATE\_IP\_PROXY\_HEADER, 144  
 WEBLATE\_LEGAL\_URL, 156  
 WEBLATE\_LICENSE\_FILTER, 146  
 WEBLATE\_LICENSE\_REQUIRED, 147  
 WEBLATE\_LIMIT\_TRANSLATION\_LENGTH\_BY\_SOURCE\_LENGTH, 147  
 WEBLATE\_LOCALIZE\_CDN\_PATH, 156  
 WEBLATE\_LOCALIZE\_CDN\_URL, 156  
 WEBLATE\_LOGIN\_REQUIRED\_URLS\_EXCEPTIONS, 145  
 WEBLATE\_LOGLEVEL, 142  
 WEBLATE\_MT\_APERTIUM\_API, 148  
 WEBLATE\_MT\_AWS\_ACCESS\_KEY\_ID, 148  
 WEBLATE\_MT\_AWS\_REGION, 148  
 WEBLATE\_MT\_AWS\_SECRET\_ACCESS\_KEY, 148  
 WEBLATE\_MT\_DEEPL\_API\_URL, 148  
 WEBLATE\_MT\_DEEPL\_KEY, 148  
 WEBLATE\_MT\_GLOSBE\_ENABLED, 149  
 WEBLATE\_MT\_GOOGLE\_CREDENTIALS, 148  
 WEBLATE\_MT\_GOOGLE\_KEY, 148  
 WEBLATE\_MT\_GOOGLE\_LOCATION, 148  
 WEBLATE\_MT\_GOOGLE\_PROJECT, 148  
 WEBLATE\_MT\_LIBRETRANSLATE\_API\_URL, 148  
 WEBLATE\_MT\_LIBRETRANSLATE\_KEY, 148  
 WEBLATE\_MT\_MICROSOFT\_BASE\_URL, 148  
 WEBLATE\_MT\_MICROSOFT\_COGNITIVE\_KEY, 148  
 WEBLATE\_MT\_MICROSOFT\_ENDPOINT\_URL, 148  
 WEBLATE\_MT\_MICROSOFT\_REGION, 148  
 WEBLATE\_MT\_MICROSOFT\_TERMINOLOGY\_ENABLED, 149  
 WEBLATE\_MT\_MODERNMT\_KEY, 148  
 WEBLATE\_MT\_MYMEMORY\_ENABLED, 148  
 WEBLATE\_MT\_SAP\_BASE\_URL, 149  
 WEBLATE\_MT\_SAP\_PASSWORD, 149  
 WEBLATE\_MT\_SAP\_SANDBOX\_APIKEY, 149  
 WEBLATE\_MT\_SAP\_USE\_MT, 149  
 WEBLATE\_MT\_SAP\_USERNAME, 149  
 WEBLATE\_NO\_EMAIL\_AUTH, 152  
 WEBLATE\_PAGURE\_TOKEN, 146  
 WEBLATE\_PAGURE\_USERNAME, 145  
 WEBLATE\_PRIVACY\_URL, 156  
 WEBLATE\_RATELIMIT\_ATTEMPTS, 147, 367  
 WEBLATE\_RATELIMIT\_LOCKOUT, 147  
 WEBLATE\_RATELIMIT\_WINDOW, 147  
 WEBLATE\_REGISTRATION\_ALLOW\_BACKENDS, 144  
 WEBLATE\_REGISTRATION\_OPEN, 144  
 WEBLATE\_REMOVE\_ADDONS, 157  
 WEBLATE\_REMOVE\_APPS, 157  
 WEBLATE\_REMOVE\_AUTOFIX, 157  
 WEBLATE\_REMOVE\_CHECK, 157  
 WEBLATE\_REMOVE\_LOGIN\_REQUIRED\_URLS\_EXCEPTIONS, 145  
 WEBLATE\_REQUIRE\_LOGIN, 145, 327  
 WEBLATE\_SAML\_IDP\_ENTITY\_ID, 152  
 WEBLATE\_SAML\_IDP\_URL, 152  
 WEBLATE\_SAML\_IDP\_X509CERT, 152



WEBLATE\_SECURE\_PROXY\_SSL\_HEADER, 144, 145  
 WEBLATE\_SERVER\_EMAIL, 143  
 WEBLATE\_SERVICE, 142, 158  
 WEBLATE\_SILENCED\_SYSTEM\_CHECKS, 146, 211  
 WEBLATE\_SIMPLIFY\_LANGUAGES, 146  
 WEBLATE\_SITE\_DOMAIN, 143, 184, 202, 328  
 WEBLATE\_SITE\_TITLE, 143  
 WEBLATE\_SOCIAL\_AUTH\_AZUREAD\_OAUTH2\_KEY, 151  
 WEBLATE\_SOCIAL\_AUTH\_AZUREAD\_OAUTH2\_SECRET, 151  
 WEBLATE\_SOCIAL\_AUTH\_AZUREAD\_TENANT\_OAUTH2\_KEY, 151  
 WEBLATE\_SOCIAL\_AUTH\_AZUREAD\_TENANT\_OAUTH2\_SECRET, 151  
 WEBLATE\_SOCIAL\_AUTH\_AZUREAD\_TENANT\_OAUTH2\_TEAM\_ID, 151  
 WEBLATE\_SOCIAL\_AUTH\_BITBUCKET\_KEY, 151  
 WEBLATE\_SOCIAL\_AUTH\_BITBUCKET\_SECRET, 151  
 WEBLATE\_SOCIAL\_AUTH\_FACEBOOK\_KEY, 151  
 WEBLATE\_SOCIAL\_AUTH\_FACEBOOK\_SECRET, 151  
 WEBLATE\_SOCIAL\_AUTH\_FEDORA, 152  
 WEBLATE\_SOCIAL\_AUTH\_GITHUB\_KEY, 150  
 WEBLATE\_SOCIAL\_AUTH\_GITHUB\_ORG\_KEY, 150  
 WEBLATE\_SOCIAL\_AUTH\_GITHUB\_ORG\_NAME, 150  
 WEBLATE\_SOCIAL\_AUTH\_GITHUB\_ORG\_SECRET, 150  
 WEBLATE\_SOCIAL\_AUTH\_GITHUB\_SECRET, 150  
 WEBLATE\_SOCIAL\_AUTH\_GITHUB\_TEAM\_ID, 150  
 WEBLATE\_SOCIAL\_AUTH\_GITHUB\_TEAM\_KEY, 150  
 WEBLATE\_SOCIAL\_AUTH\_GITHUB\_TEAM\_SECRET, 150  
 WEBLATE\_SOCIAL\_AUTH\_GITLAB\_API\_URL, 151  
 WEBLATE\_SOCIAL\_AUTH\_GITLAB\_KEY, 151  
 WEBLATE\_SOCIAL\_AUTH\_GITLAB\_SECRET, 151  
 WEBLATE\_SOCIAL\_AUTH\_GOOGLE\_OAUTH2\_KEY, 151  
 WEBLATE\_SOCIAL\_AUTH\_GOOGLE\_OAUTH2\_SECRET, 151  
 WEBLATE\_SOCIAL\_AUTH\_GOOGLE\_OAUTH2\_WHITE\_LISTED\_DOMAINS, 151  
 WEBLATE\_SOCIAL\_AUTH\_GOOGLE\_OAUTH2\_WHITE\_LISTED\_EMAILS, 151  
 WEBLATE\_SOCIAL\_AUTH\_KEYCLOAK\_ACCESS\_TOKEN\_URL, 152  
 WEBLATE\_SOCIAL\_AUTH\_KEYCLOAK\_ALGORITHM, 152  
 WEBLATE\_SOCIAL\_AUTH\_KEYCLOAK\_AUTHORIZATION\_URL, 152  
 WEBLATE\_SOCIAL\_AUTH\_KEYCLOAK\_KEY, 152  
 WEBLATE\_SOCIAL\_AUTH\_KEYCLOAK\_PUBLIC\_KEY, 152  
 WEBLATE\_SOCIAL\_AUTH\_KEYCLOAK\_SECRET, 152  
 WEBLATE\_SOCIAL\_AUTH\_OPENSUSE, 152  
 WEBLATE\_SOCIAL\_AUTH\_SLACK\_KEY, 152  
 WEBLATE\_SOCIAL\_AUTH\_UBUNTU, 152  
 WEBLATE\_SSH\_EXTRA\_ARGS, 147  
 WEBLATE\_STATUS\_URL, 156  
 WEBLATE\_TIME\_ZONE, 144  
 WEBLATE\_URL\_PREFIX, 146  
 WEBLATE\_USERNAME\_REQUIRED, 147  
 WEBLATE\_WORKERS, 142, 157, 158  
 WL\_BRANCH, 299  
 WL\_COMPONENT\_NAME, 299  
 WL\_COMPONENT\_SLUG, 299  
 WL\_COMPONENT\_URL, 299  
 WL\_ENGAGE\_URL, 299  
 WL\_FILE\_FORMAT, 299  
 WL\_FILEMASK, 299  
 WL\_LANGUAGE, 299  
 WL\_NEW\_BASE, 299  
 WL\_PATH, 299  
 WL\_PREVIOUS\_HEAD, 299  
 WL\_PROJECT\_NAME, 299  
 WL\_PROJECT\_SLUG, 299  
 WL\_REPO, 299  
 WL\_TEMPLATE, 299  
 WL\_VCS, 299  
 VCS\_BACKENDS setting, 329  
 VCS\_CLONE\_DEPTH setting, 329  
 version option de ligne de commande wlc, 132

## W

WEB\_WORKERS, 142, 157  
 Weblate (*classe dans wlc*), 135  
 weblate admin command  
   add\_suggestions, 348  
   auto\_translate, 348  
   celery\_queues, 349  
   checkgit, 349  
   cleanup\_ssh\_keys, 350  
   cleanuptrans, 350  
   flush\_domains, 349  
   commit\_pending, 349  
   commitgit, 349  
   createadmin, 350  
   dump\_memory, 350  
   dump\_userdata, 351  
   import\_demo, 351

- import\_json, 351
- import\_memory, 352
- import\_project, 352
- importuserdata, 354
- importusers, 354
- install\_addon, 354
- list\_languages, 355
- list\_translators, 355
- list\_versions, 355
- loadpo, 355
- lock\_translation, 356
- move\_language, 356
- pushgit, 356
- setupgroups, 357
- setuplang, 357
- unlock\_translation, 357
- updatechecks, 357
- updategit, 358
- WEBLATE\_ADDONS
  - setting, 330
- WEBLATE\_ADMIN\_EMAIL, 141, 143, 148
- WEBLATE\_ADMIN\_NAME, 141, 143
- WEBLATE\_ADMIN\_PASSWORD, 138, 141, 143
- WEBLATE\_ADMIN\_PASSWORD\_FILE, 143
- WEBLATE\_AKISMET\_API\_KEY, 365
- WEBLATE\_ALLOWED\_HOSTS, 182, 186, 328
- WEBLATE\_API\_RATELIMIT\_ANON, 94, 95
- WEBLATE\_API\_RATELIMIT\_USER, 94, 95
- WEBLATE\_EMAIL\_HOST\_PASSWORD, 155
- WEBLATE\_EMAIL\_PORT, 155
- WEBLATE\_EMAIL\_USE\_SSL, 155
- WEBLATE\_EMAIL\_USE\_TLS, 155
- WEBLATE\_ENABLE\_HTTPS, 214
- WEBLATE\_EXPORTERS
  - setting, 330
- WEBLATE\_FORMATS
  - setting, 331
- WEBLATE\_GPG\_IDENTITY
  - setting, 331
- WEBLATE\_LOCALIZE\_CDN\_PATH, 156
- WEBLATE\_RATELIMIT\_ATTEMPTS, 367
- WEBLATE\_REQUIRE\_LOGIN, 327
- WEBLATE\_SECURE\_PROXY\_SSL\_HEADER, 144
- WEBLATE\_SERVICE, 142
- WEBLATE\_SILENCED\_SYSTEM\_CHECKS, 211
- WEBLATE\_SITE\_DOMAIN, 184, 202, 328
- WEBLATE\_WORKERS, 142, 157, 158
- WeblateConfig (*classe dans wlc.config*), 135
- WeblateException, 135
- WEBSITE\_REQUIRED
  - setting, 331
- wlc, 130
  - module, 135
- wlc.config
  - module, 135
- wlc.main
  - module, 136

## X

- XLIFF
  - file format, 69
- XML
  - file format, 81

## Y

- YAML
  - file format, 79
- YAML Ain't Markup Language
  - file format, 79